X-300 〔2025-100〕
X-370 〔2025-300〕
……For U.S.A. & Canada

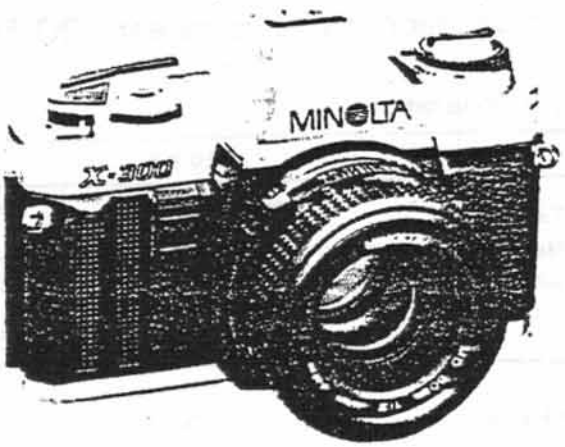

TYPE OF CAMERA
Electrically controlled 35 mm focal plane shutter SLR AE camera
Photography system : Aperture priority AE and manual photography
Standard lens : MD50mm F 1.2, MD50mm F 1.4, MD50mm F 1.7, MD50mm F 2
Lens mount : Minolta SLR bayonet mount
Film used : J135 rolled film
Size of image field : 24 mm×36 mm

SHUTTER
Electrically controlled focal plane shutter (Traveling holizontally)
Shutter speed : Auto···4 sec. to 1/1000 sec.
Manual···1, 1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500, 1/1000 sec. and B (bulb).
Shutter speed dial : Click stop endless dial
Shutter release : Electromagnetic release, remote cord, wireless controller IR-1 can be mounted.
Shutter release locks in case of battery voltage drop.
With main switch at ON.
Self timer : Electronic self-timer starts by depressing the operating button.
Operation is indicated by camera-front LED blink.
Shutter release notice is given.
Self-timer operation can be canceled anytime before release.

EXPOSURE CONTROL
Light metering system : TTL center-weighted average metering.
Detector element : 1 Silicon photocell
Auto exposure interlock range : EV 1-18 (ASA/ISO 100 f/1.4 lens)
Film speed scale : ASA/ISO 12-3200 (locked every 1/3 step)
AE lock : Only for A mode.
: Operation by pushing self-timer lever down.
Metering switch : By touch switch or depressing of operating button slightly.
Memorizing of metering and finder LED indication for 15 sec. after the switch OFF.

VIEW FINDER
Type : SLR pentaprism type
Focusing screen : Center···Split-image and micro-prism
Periphery···Acute Matte
Viewfinder showing : 95% of 24 mm×36 mm film-frame area
Magnification : 0.9×(using 50 mm lens at ∞ setting)
Dioptric power : −1 diop.
Finder indication :
: Mode indication in use (A, M)
: Shutter speed scale with LED indication
: Slow shutter speed indication for 1-4 sec (▽)
: Over-/under- range LED indication blinking at 4 Hz (△/▽)
: B-setting indicator (✱)
: Setting shutter speed indicator (Shutter speed LED blinking at 4 Hz)
: Flash-ready signal (LED next to "60" blinking at 2 Hz)
: Battery check (by mode indication: Indicator ON when batteries are serviceable; blinking when near exhaustion; no LEDs light when exhausted)
Mirror : Slide-up quick return

FLASH SYNC
Sync speed : X contact, electroflash is synchronized at speeds slower than 1/60 sec; flash bulb is at speeds slower than 1/15 sec.
Hot shoe : Direct contact, sync auto control contact

FILM WINDING, REWINDING
Film winding : By lever. Winding at an angle of 130° (preliminary angle: 30°)
: Auto winding by Motor Drive 1 or Auto Winder
: With Safe Load Signal
Film counter : Auto resetting calculation. With Safe Load Signal
Film rewinding : By rewind button and crank system: auto reset of rewind button.

BACK COVER
Opening/Closing by pulling up knob, snapping back the cover.
With grip, memo holder (ISO, DIN, ASA table)

POWER
Two 1.5 V alkaline-manganese (LR44: Eveready A-76 or equiv.) or two 1.55 V silver-oxide (SR44: Eveready G-13 or equiv.)

OTHERS
Battery holder and Eyepiece cap

SIZE AND WEIGHT
51.5×90×137 mm (2×3-9/19×5-3/8 in.)
470 g (16-9/16 oz.) without power cells

ACCESSORIES
Flash : Auto Electroflash 320X, 200X, 132X, 118X
Winder : Motor Drive 1, Auto Winder G
Remote control : Wireless Controller IR-1 set
Remoto Cord S/L
Others : Interchangeable Minolta lenses and applicable Minolta SLR system accessories.

Comparision table between 2024 and 2025

(only differences are described)

I. Appearance

Item	2024	2025	Note
• Top cover • Mode/shutter speed selector • Film-advance lever			• For 2025, only silver model is available. • Discontinuity of Auto lock mech. of mode/shutter speed selector.
Back grip	Yes	No	
Bottom cover	Same shape		Marking: JAPAN or MARAYSIA
Bayonet lens mount	SUS	BS (Cr. plating)	
Main switch			• ON-OFF changeover • No audible piezoelectric warning mark

II. Function

Item	2024	2025	Note
Direct autoflash metering	Yes	No	• Discontinuity of direct autoflash metering contact. • Flash fires manually with PX series (360PX can be used as sensor auto). • No flash-distance checker in viewfinder. • Discontinuity of slow-shutter sync function.
Sync terminal	Yes	No	• No electric shock prevention.
Preview button	Yes	No	
Audible piezoelectric warning	Yes	No	• No slow-shutter-speed warning. • No self-timer audible beeps.
F-number indication in viewfinder	Yes	No	
Connection with Multi-Function Back	Yes	No	• Back cover: fixed type (not detachable) • Discontinuity of contact terminals.

REPAIR

■ The contents of this manual are mainly related to the adjustment procedures for the 2025.

Except for Exposure adjustment, Installation of external parts, see 2024 Service Manual.
"Page" column provide with ※ shows related page of 2024 Service Manual Repair Guide

■ Assembly and adjustment procedures	Page	※ Page
[1] Body assembly 1 (spool, sprocket, winding base plate A)	1	
■ Sprocket gear positioning method	2	
[2] Body assembly 2 (winding shaft)	3	
■ Winding gear positioning method	4	
■ Reversion stop lever stop timing adjustment	4	
[3] Body assembly 3 (winding base plate B)	5	
■ Overrun eccentric pin adjustment	6	
■ Check of winding mechanism	7 ~ 8	
[4] Front base plate block assembly 1 (shutter, mirror box, magnet base plate)	9	
■ Check of magnet attraction	12	
[5] Front base plate block assembly 2 (finder block, bayonet mount, front cover, etc.)	13	
[6] Front base plate block assembly (mounting front base plate block onto body)	14	
■ Shutter gear position adjustment	15	
■ Shutter charge adjustment	16	
[7] Flexible P.C board installation	17	
■ Body back adjustment	19	
■ Finder back adjustment	20	
■ Exposure adjustment		
[1] ASA inclination adjustment	3	
[2] A/D conversion reference voltage adjustment	3	
[3] Manual SS adjustment	4	
[4] A-auto level adjustment	5	
■ Check of LED indication	5	
■ Check and adjustment of release lock voltage and LED blink voltage	6	
■ Check of limits at high and low shutter speeds	6	
■ Installation of external parts	7	
■ Shutter block assembly procedure		31
■ Shutter block adjustment	8	
■ Mirror box assembly procedure		37
■ Measuring instruments		41
■ Focusing plate replacement procedure		42

■ Adjustment and checks to be made

	Page	※ Page
[1] Body, winding unit		
■ Sprocket gear positioning	2	
■ Winding gear positioning	4	
■ Film counter operation gear positioning	5	
■ Reversion stop lever stop timing adjustment	4	
■ Overrun eccentric pin adjustment	6	
■ Sprocket claw position check	7	
■ Reversion stop lever timing check	7	
■ Winding operation lever timing check	8	
[2] Shutter operation		
■ Shutter gear position adjustment	15	
■ Shutter charge adjustment	16	
■ Shutter curtain position check	33, 34	
■ Mirror magnet attraction check	12	
■ Release lock voltage check	28	
■ Synchro X time lag	8	
[3] Shutter speed		
■ Curtain speed adjustment	4, 8	
■ Manual SS adjustment	4, 8	
[4] Auto exposure		
■ ASA inclination adjustment	3	
■ A/D conversion reference voltage adjustment	3	
■ A-auto level adjustment	5	
■ Check of release magnet attraction	12	
■ Check of limits at high and low shutter speeds	6	
[5] LED		
■ Check of LED indication	5	
■ Check of LED blink voltage	6	
[6] Viewfinder, focusing		
■ Body back adjustment	19	
■ Finder back adjustment	20	
■ Mirror angle adjustment	39, 40	

■ Precautions

■ The following precautions must be taken concerning all plastic parts.

1. When cleanig, use Flonsolve or alcohol. Do not use thinner, ketone, ether, etc.
2. Secure all parts with the specified screws, taking care not to exent excessive stress to them.

■ Handling of the flexible board

The flexible board uses MOS ICs and is very sensitive to static electricity. Therefore, the following points must be kept in mind when repairing.

- When handling the flexible board itself or wiring it to the body, use a conduction mat to prevent static electricity, and perform all work as shown in the illustration below.

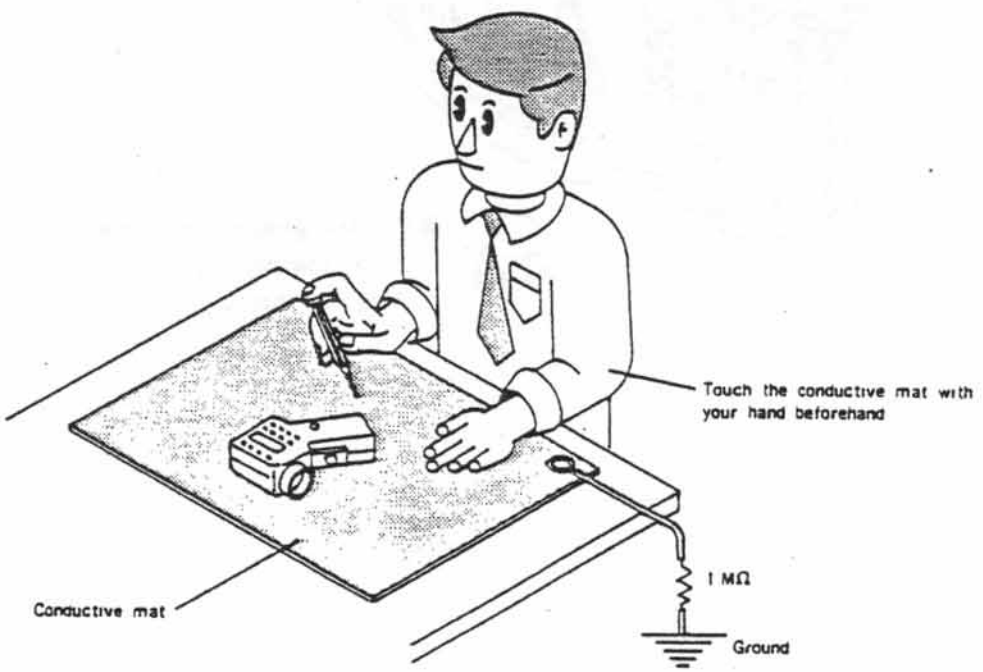

■ When grounding is impossible, connect the cable to a large metal plate (steel desk or shelf).

■ Preparation for adjustments

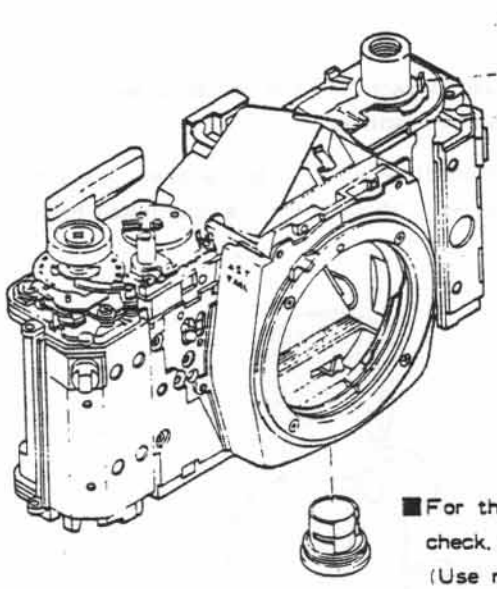

■For the general adjustment or check, use battery.
(Use new battery)

■ Exposure adjustment

■Resistor positions and adjustments

■Fig. 1

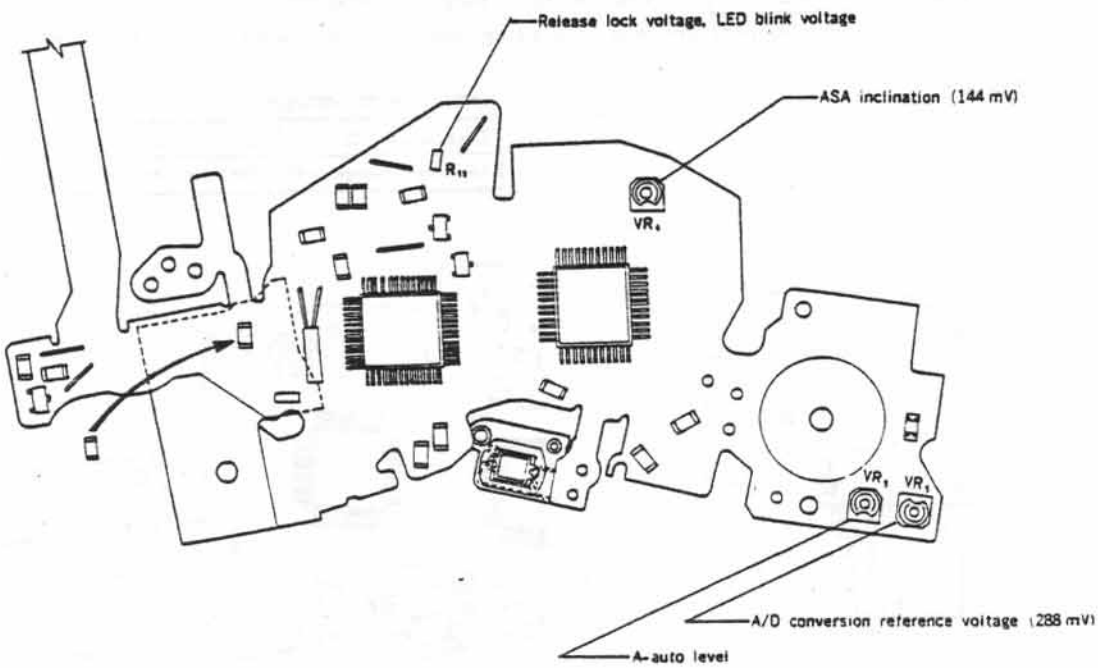

■Beforehand set ASA film speed to ASA 100 properly as below:
Set ASA brush holder within range of ASA 100.

■Fig. 2

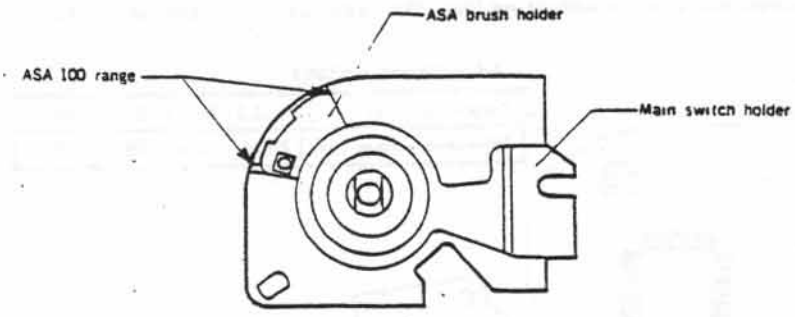

SV resistor plate

1 Adjustment of ASA inclination

■ Measuring instrument : Digital multimeter (Type 2508, 3476, 2507)

■ Adjustment procedure

1. Set the metering switch to ON and adjust by turning VR_4 so that the voltage at the point in Fig. 1 is **144±2mV** (In case of 25°C room temperature)
   Depending on the temperature when adjusting, use the table below to get adjustment voltage.

■ Fig. 1

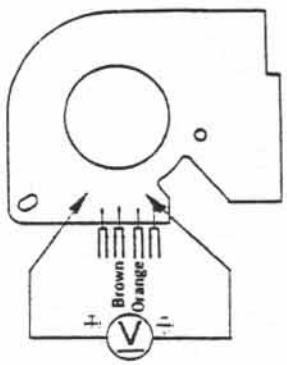

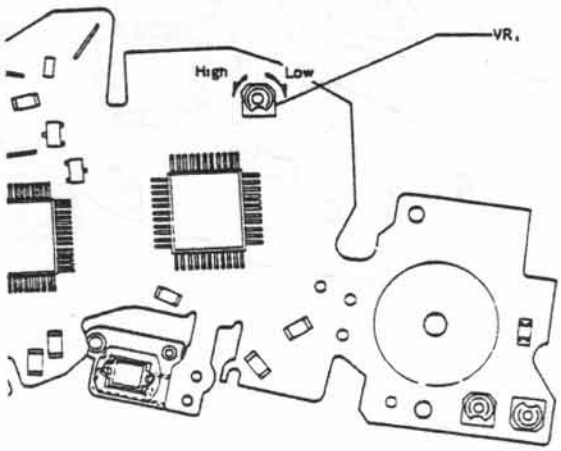

[Adjustment voltage]

Temperature (°C)	15±2.5	20±2.5	25±2.5	30±2.5
Adjustment voltage (mV)	139±2	141.5±2	144±2	146.5±2

2 Adjustment of A/D conversion reference voltage

■ Measuring instrument : Digital multimeter (Type 2508, 3476, 2507)

■ Adjustment procedure

1. Set the metering switch to ON and adjust by turning VR_5 so that the voltage at the point in Fig. 2 is **288±3mV** (In case of 25°C room temperature)
   Depending on the temperature when adjusting, use the table below to get adjustment voltage.

[Adjustment voltage]

Temperature (°C)	15±2.5	20±2.5	25±2.5	30±2.5
Adjustment voltage (mV)	278±3	283±3	288±3	293±3

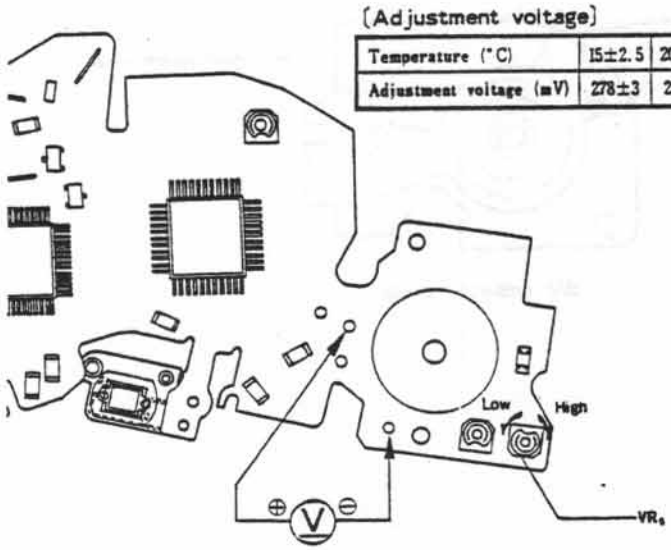

3 Adjustment of manual SS

■Measuring instruments : Shutter tester (Model S-2101, FS-1DMN4)

■Adjustment procedure

- Determine position of TV brush, referring to Fig. 2, or looking at shutter speed LED.

■Fig. 1

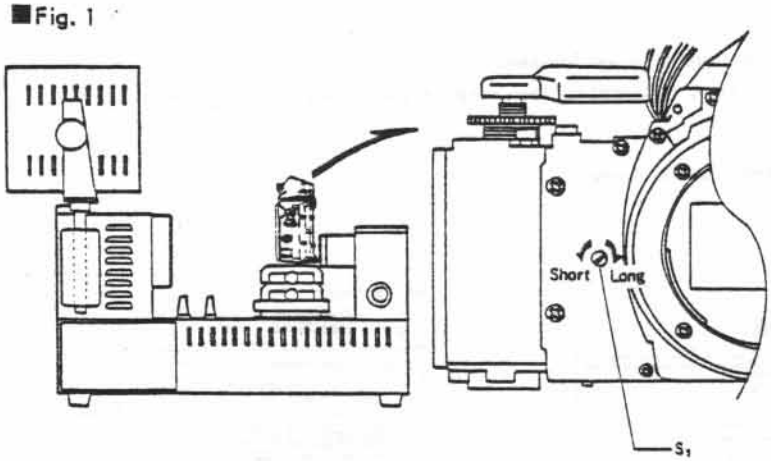

■Fig. 2 Relation between TV brush holder position and manual SS

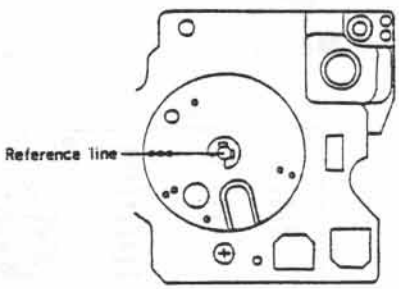

1. Shutter speed adjustment and check (see the table below)

Step	Item	Part adjusted	Adjustment (check)	Remarks
①	1/1000 curtain speed check	—	(Both 1 st & 2 nd curtains are within 13 ms.)	If it is more than 13 ms or less than 10 ms, adjust the 2 nd curtain speed.
②	1/1000 adjustment	S_1 eccentric pin	0.98 ms	—
③	1/60 check	—	(16~18.5 ms)	
④	X time lag	—	(Range A : 0.4 ms or more) (Range B : 2.4 ms or more)	Check it with SS 1/60 and if is defective, perform the adjustment on P. 8.

- When the exposure unevenness at steps ②~③ is over 0.3 EV in both B-A and B-C ranges, and over 0.4 EV in the A-C range, adjust the curtain speed as follows.
- For the shutter speed standard, refer to the inspection standard.

2. Curtain speed adjustment

Adjust by turning the ratchet so that the 1 st and 2 nd curtain speeds are 11±0.3 ms at 1/1000.

■Fig. 3 (Increasing the curtain speed)

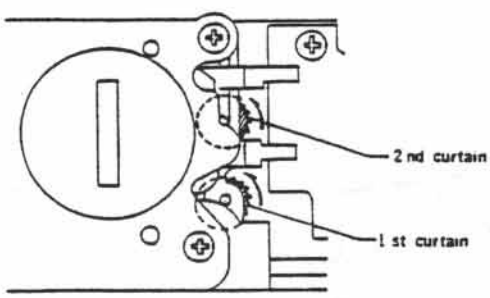

■Fig. 4 (decreasing the curtain speed)



- Remove the battery case base plate while pushing ratchet to release the ratchet claw and the rachet return.
  (Do not return it completely.)
- Return it sufficiently and adjust by slowly increasing the curtain speed.

4 Adjustment of A-auto level, check of LED indication

■ Measuring instruments : Luminance box (Model L-2101, L-222, L-223)
: EE tester (Model EE-2101, EE-2111)
: SS adaptor for EE tester (Model SD-2101)
: Master lens for S-auto (2005-0001-75)

■ Adjustment procedure

1. Set the camera and measuring instruments as follows.
   - After setting the master lens, turn it counterclockwise to put aside the looseness to one side.

■ Fig. 1

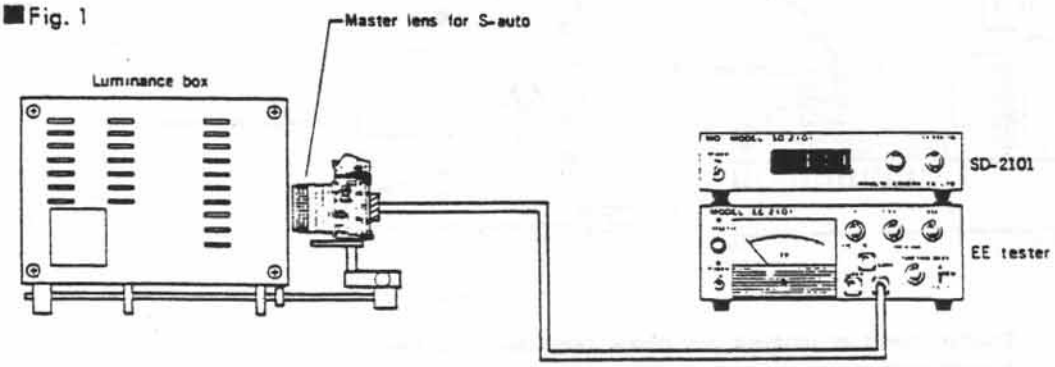

- Luminance box
  K value : 1.2
  ※ Luminance : EV 10, 15
- Camera
  Shutter dial : A
  ASA : 100
- Master lens
  Aperture : F 5.6
  Distance : ∞
- EE tester
  K value dial : 1.2
  ASA dial : 100
- SD-2101
  Aperture switch : F 5.6
  Luminance switch : Same as luminance box.

※ When using luminance box (L-222 or L-223), set it at EV 11, and use a ND filter (MINOLTA ND 50% FOR ADJUSTMENT).

2. Adjust and check as follows:

Step	Luminance	Shutter speed adjustment	EE level allowable range	Part adjusted	Indication allowable range (±0.5EV)			
1	EV 10	34 ms	—	VR_4 (Fig. 2)	1/60	▭	■	■
					1/30	▭	▭	▭
					1/15	■	■	▭
2	EV 15	—	±0.4EV	(Check only)				

■ Fig. 2

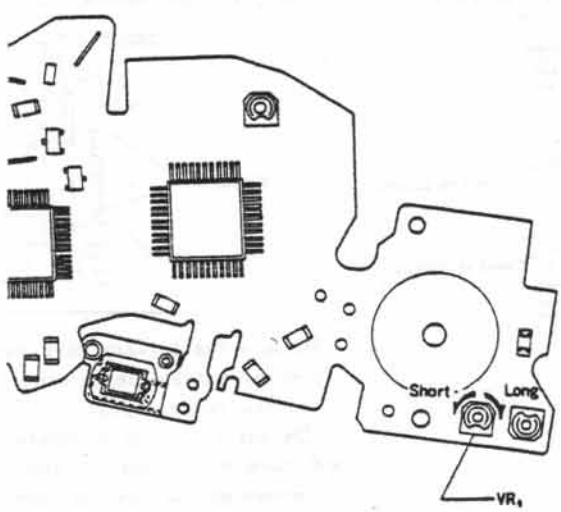

■ Check and adjustment of release lock voltage and LED blink voltage

■Check

[1]Release lock voltage	Standard	2.46±0.1V
[2]LED blink voltage	Standard	2.56±0.1V

• In case of out of standard above, adjust those as following procedure.

■Measuring instruments : Constant voltage D.C power source (MODEL 524B, E-1, E-2)
: Digital multimeter (Type 2508, 3476, 2507)
: Direct current tester

■Checking procadure

1. Check the current consumption at B setting (incl'd * indication) using measuring instruments as follows.

■Fig. 1

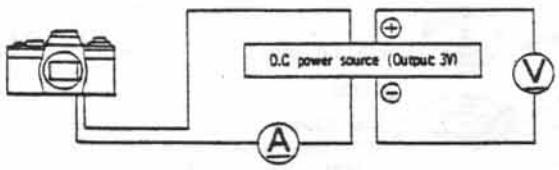

• Camera
Shutter dial : B
Touch SW : ON
Connection of power source : ⊕…Battery case contact
⊖…Batter case base plate

2. Measure the release lock voltage while reducing slowly the voltage of D.C power source from 3V.
3. In case of out of standard, replace R_{11} (68-390KΩ).

■Fig. 2

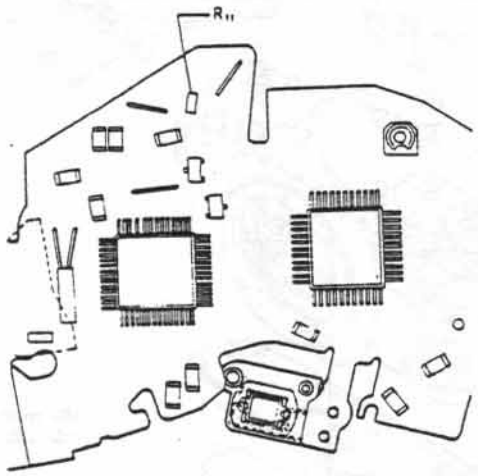

■ Checking high and low shutter speed limits

■Measuring instrument : Shutter tester (Model S-2101, FS-1DMN4)

[1]High shutter speed limit (shutter speeds in other than high luminance operation in A mode.)
• Check the shutter speed with the shutter dial set to A.

Standard	0.69~1.38ms

[2]Low shutter speed limit (shutter speeds in other than low luminance operation in A mode.)
• Set the shutter dial to A, and then check the exposure time with light to the receiver interrupted.

Standard	Within 5 sec.

External parts (completion)

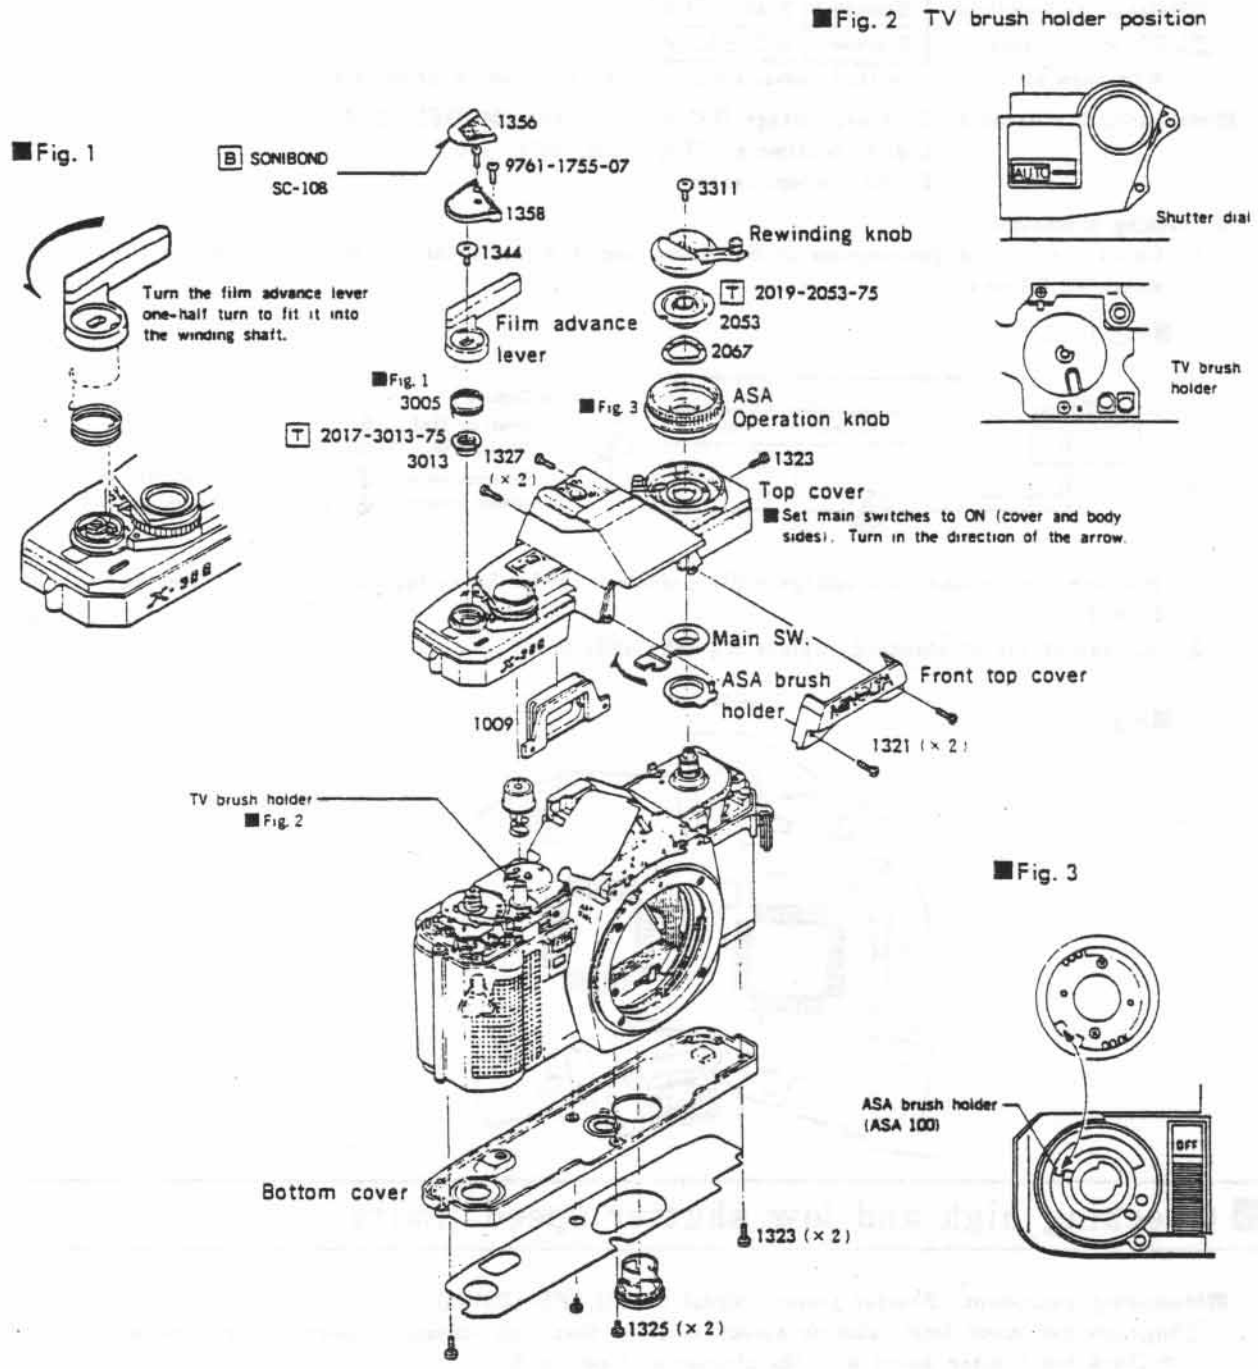

■ Shutter block adjustment

■ Measuring instruments : Camera standard tester (Model ST-5101)
: Shutter tester (Model S-2101, FS-1DMN4)

■ Preparations

1. Mount the shutter onto the front base plate block and install it onto the body (as shown in Fig. 1).
2. Connect the tester as shown in Fig. 2.

■ Fig. 1

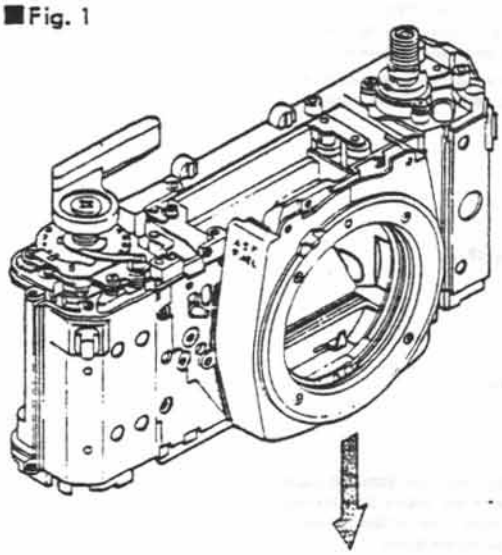

Operate the shutter as described on P. 15. (2024 Repair Guide)

■ Fig. 2

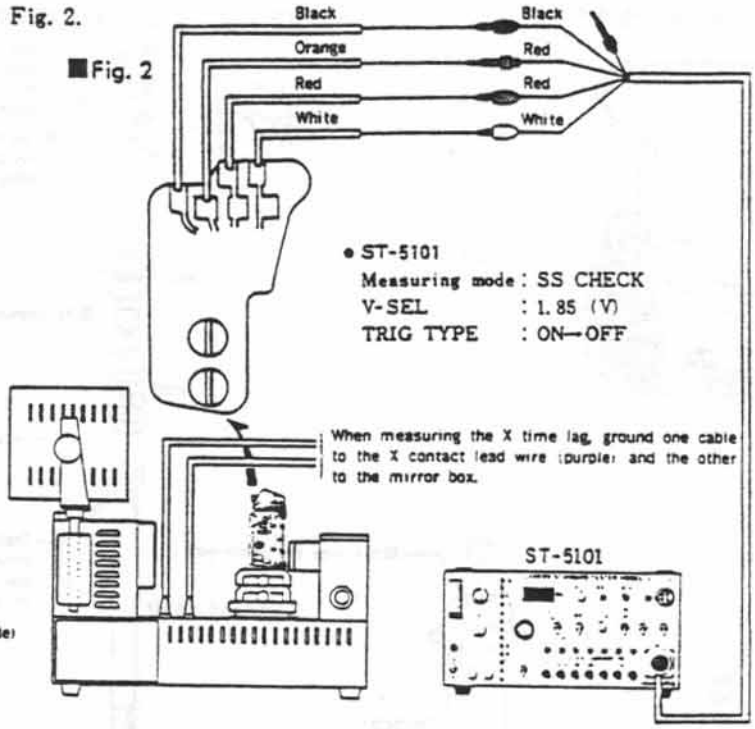

■ Adjustment procedure

[1] Curtain speed adjustment

1. Set the SS-SEL of ST-5101 to 1000 and adjust by turning the curtain spring cylinder shaft so that both curtain speeds are **11±0.3ms**. (Fig. 3)
   • When the curtain is not open, shift SS-SEL to 60 and make a rough adjustment beforehand so that both curtain speeds are about 12 ms, and then adjust again with the SS-SEL set to 1000.

[2] Shutter speed adjustment

1. With the SS-SEL set to 1000, release the shutter and adjust by turning the S_3 eccentric pin so that the shutter tester indicates **0.98ms**. (Fig. 4)

[3] X time lag adjustment

1. Connect the synchro cord of the shutter tester to the camera. (Fig. 2)
2. With the SS-SEL set to 60, release the shutter and check to be sure that the speed is **0.4ms or more in range A and 2.4ms or more in range B**.

To make the adjustment, bend the end of the X contact.

■ Fig. 3

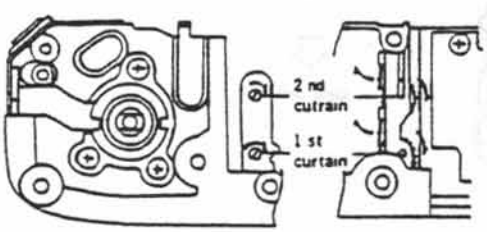

• Increasing the curtain speed

• Decreasing the curtain speed

■ Fig. 4

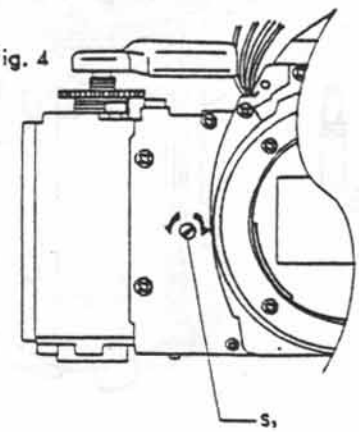

■ Fig. 5

1 Spool, sprocket, winding base plate A

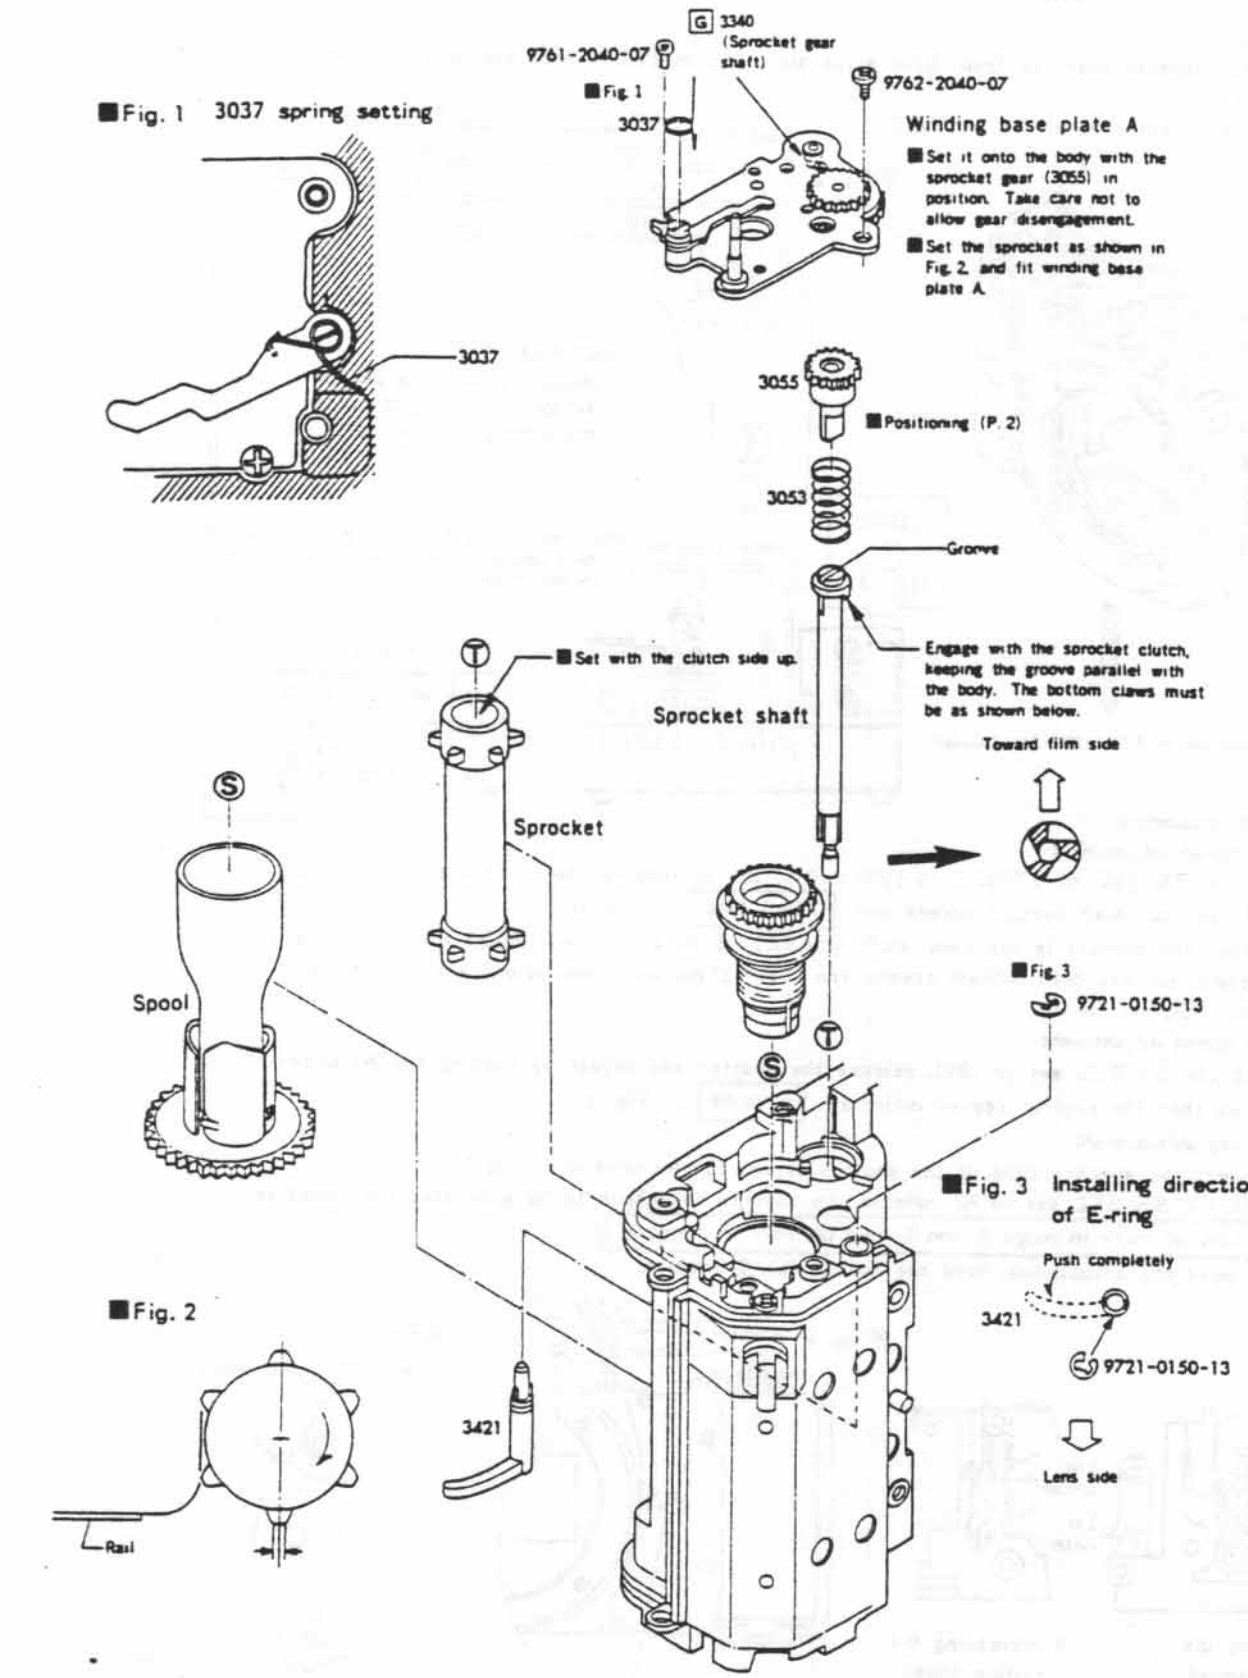

Sprocket gear positioning procedure

■Fig. 1

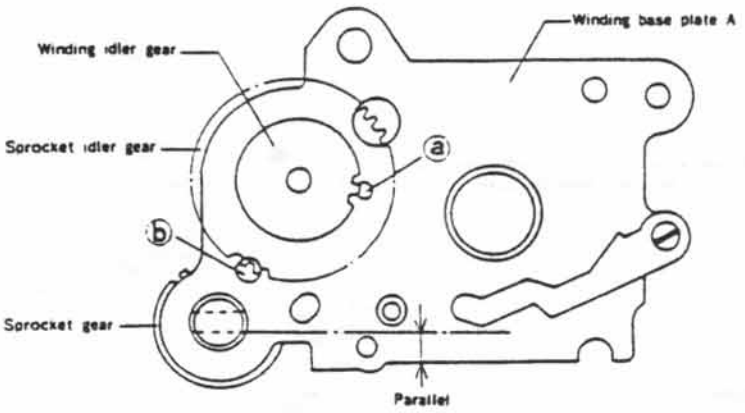

■Fig. 2



1. With the winding idler gear crest fitted in hole ⓐ of winding base plate A and with the sprocket idler gear bottom fitted in hole ⓑ, set the sprocket gear so that the shaft under the sprocket gear is parallel with winding base plate A.
2. Then, put a mark on the tooth of the winding idler at hole ⓐ, as shown in Fig. 2.
   - After marking the winding idler gear, align the mark with hole ⓐ and set the sprocket gear as shown in Fig. 1.

2 Winding shaft

Assemble the parts in the order ①~⑨

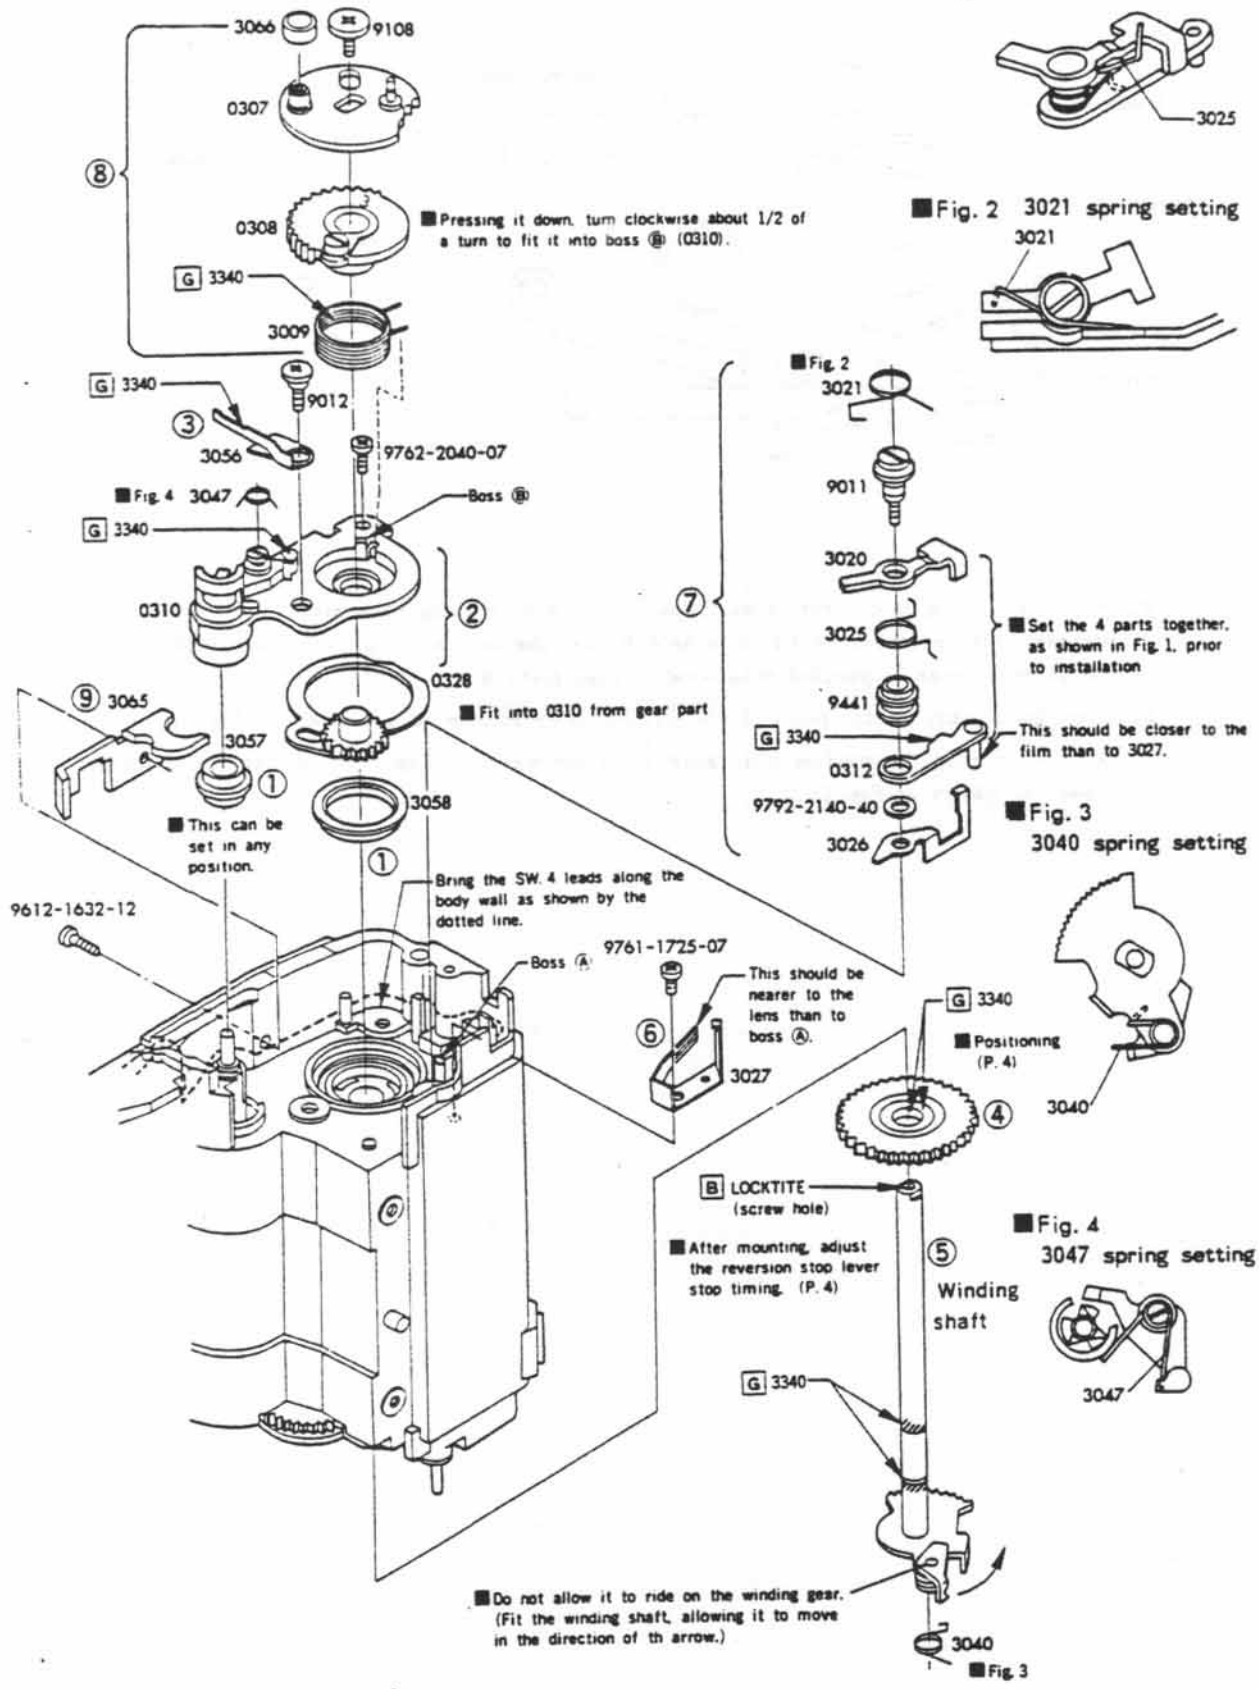

■ Winding gear positioning procedure

■Fig. 1 Winding idler gear position



■Fig. 2

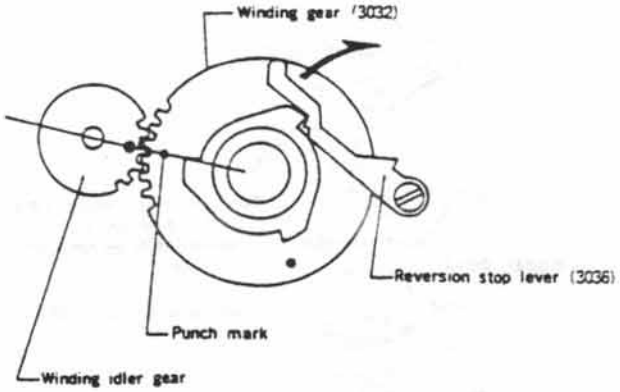

1. Make sure that the winding idler gear is positioned as shown in Fig. 1.
2. Allow 3036 to move in the direction of the arrow, then set the winding gear so that the punch mark of the winding gear is aligned with the mark of the winding idler gear. (Fig. 2)

■ Reversion stop lever stop timing adjustment

1. Position the winding operation plate as shown in Fig. 3, and temporarily set the winding operation lever.
2. With the winding claw and reversion stop lever fitted into the winding gear as shown in Fig. 3, press the winding operation plate in the direction of arrow Ⓑ while applying a load to the sprocket in the direction of arrow Ⓐ so that the winding claw is set securely onto the winding gear.

■Fig. 3

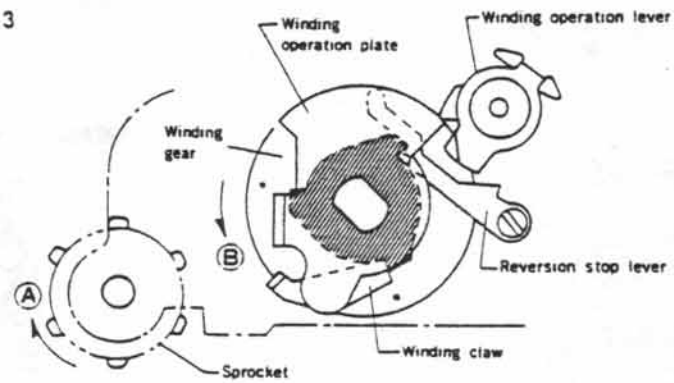

3. Applying a load to the sprocket and winding operation plate as shown by Ⓐ and Ⓑ, turn the reversion stop lever shaft until the winding operation lever is disengaged from the winding operation plate. (Fig. 4)

■Fig. 4

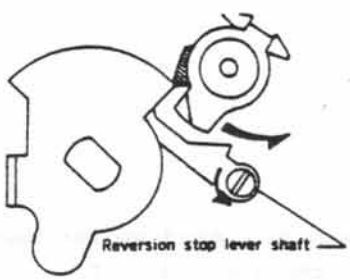

3 Winding base plate B

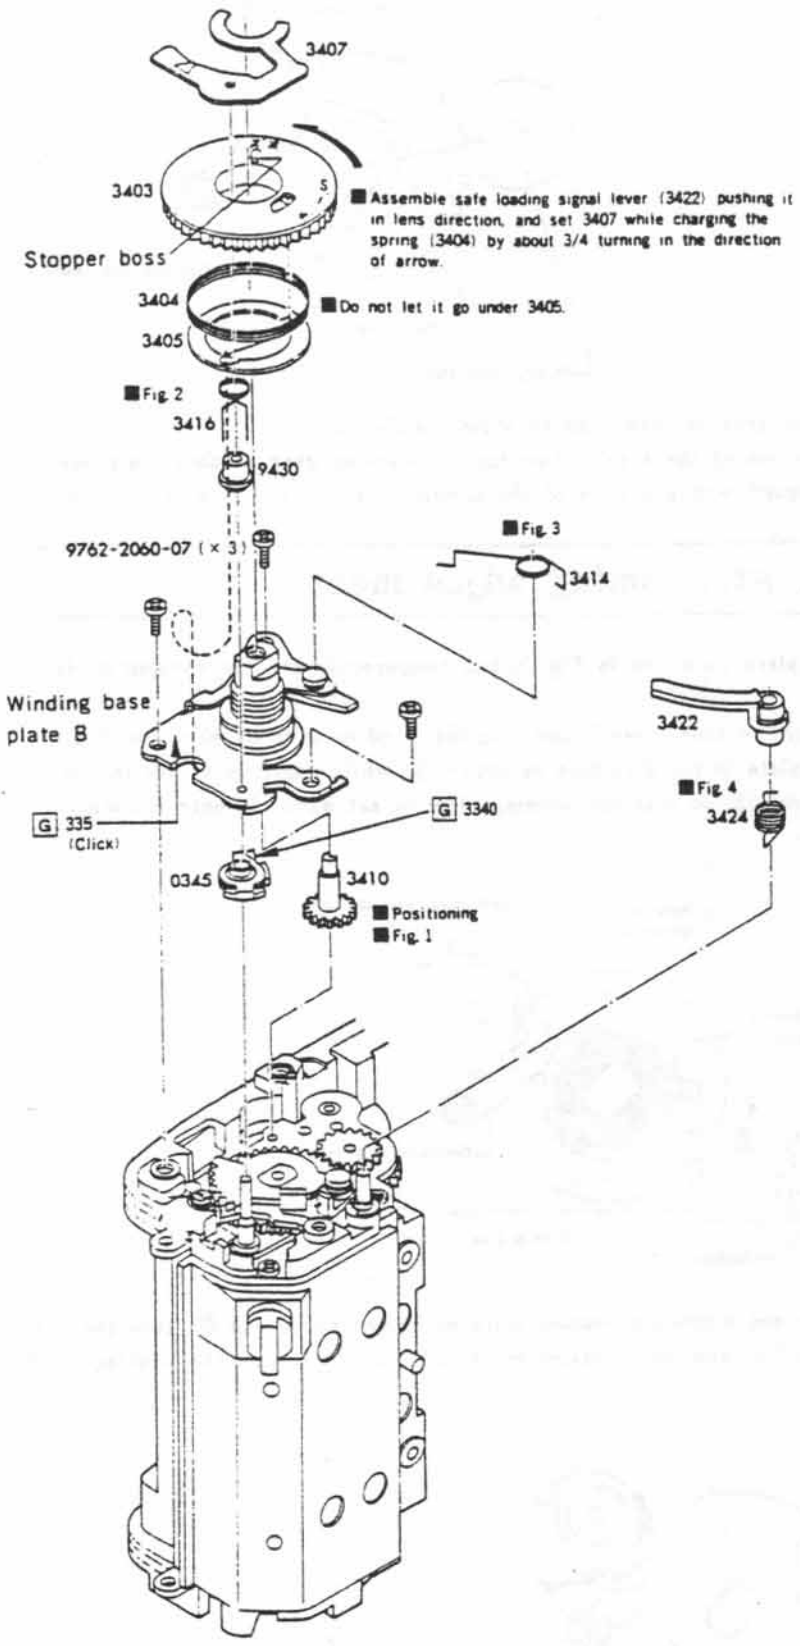

■Fig. 1

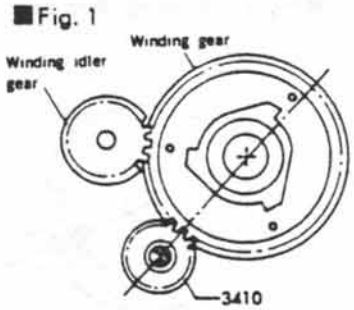

● Make sure that the punch mark of the winding gear is correctly facing the center of the winding idler gear, and then set 3410 so that the V groove is positioned as shown above.

■Fig. 2 3416 spring setting



■Fig. 3 3414 spring setting



■Fig. 4 3424 spring setting

■After completion of the assembly work, mount the film advance lever and carry out the adjustments and checks on P. 6, 7, 8.

■ Overrun eccentric pin adjustment

1. After winding, hold the film advance lever and turn the eccentric pin (9291) counterclockwise until the sprocket shaft (3052) touches the winding shaft receiver. (Fig. 1)
2. Return the winding lever slightly, and then wind it again to set it in the condition shown in Fig. 2.

■Fig. 1

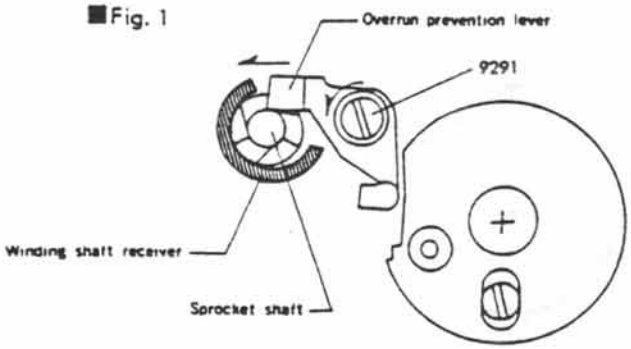

■Fig. 2



3. Then, shift the sprocket shaft by finger toward the body center to set it in the condition shown in Fig. 3, and slowly turn the eccentric pin (9291) clockwise until the overrun prevention lever is engaged with the ratchet of the sprocket shaft.

■Fig. 3

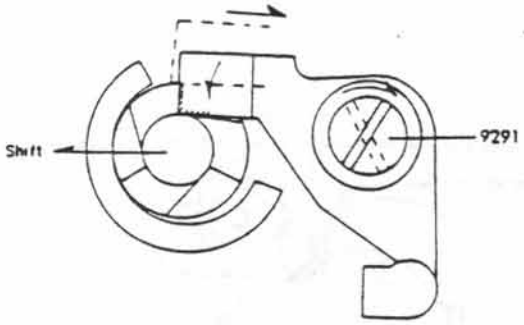

• Checking adjustment : During the winding lever operation, the end of the overrun prevention lever should not be caught by the sprocket claw. After winding is completed, the lever should be engaged with the claw.

Winding mechanism check

1 Position of sprocket claws

After winding, hold the winding lever and return the sprocket in the direction of the arrow, as shown in Fig. 1. The sprocket claw positions should then be as illustrated.

■Fig. 1

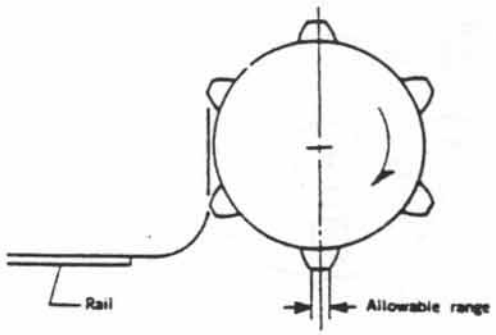

2 Reversion stop lever timing

Slowly turn the film advance lever while applying a load to the sprocket. The winding operation lever should disengage from the winding operation plate after (or at the same time) the second step of the reversion stop lever begins to engage with the claw of the winding gear.

■Fig. 2

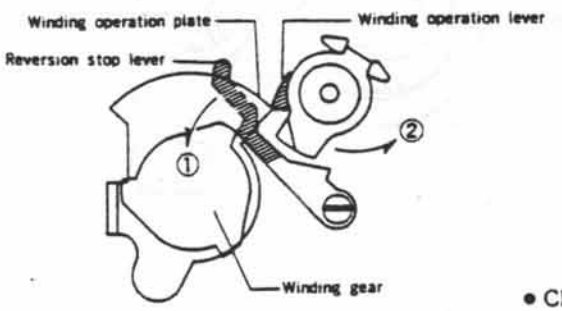

- Check through the clearance of the strap hanger screw.

3 Check and adjustment of winding operation lever timing

- After winding completion, slowly return the film advance lever. The winding stop lever should engage on the 1 st stop position of the charge operation plate. Before it engages on the 2 nd stop position, ① the winding claw and ② the winding operation lever should disengage from the winding operation plate. The order of ① and ② is reversable.
- And also make sure that a clearance should be visible between winding stop lever and charge operation plate after winding stop lever engages with the 2 nd stop position of charge operation plate.

■Fig. 3

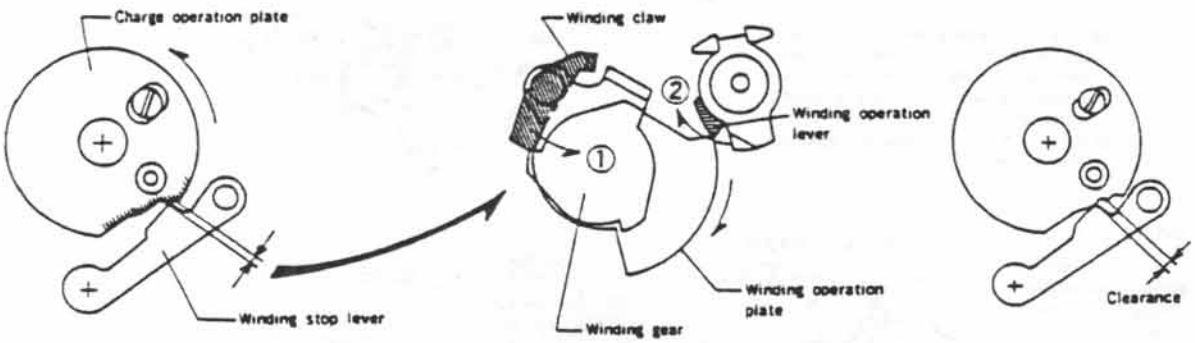

If adjustment is not made well as mentioned above, replace winding stop lever with a new one.

(Timing failure of winding operation lever may occur by replacing parts of winding mech. with accumulated tolerance of each part.)

■Fig. 4



Types of winding stop lever-A set

Parts No.	Mark	L(mm)
2017-0312-01	no marked	8.6
2017-0322-01	marked	8.8

■Note:

The following symptons may occur by replacing parts of the winding stop lever A-set even timing of winding operation lever is normal.

① The symptom of replacing 0322-01 by 0312-01.
Idle winding may takes place cause of winding claw is not engaged even winding stop lever engaged on 2 nd stop position.

② The symptom of replacing 0312-01 by 0322-01.
Winding stop lever may not engage on the 2 nd stop position or no clearance appears even winding stop lever engaged.

4 Front base plate block assembly-1

■Refer to the arrangement of the lead wires on the next page.

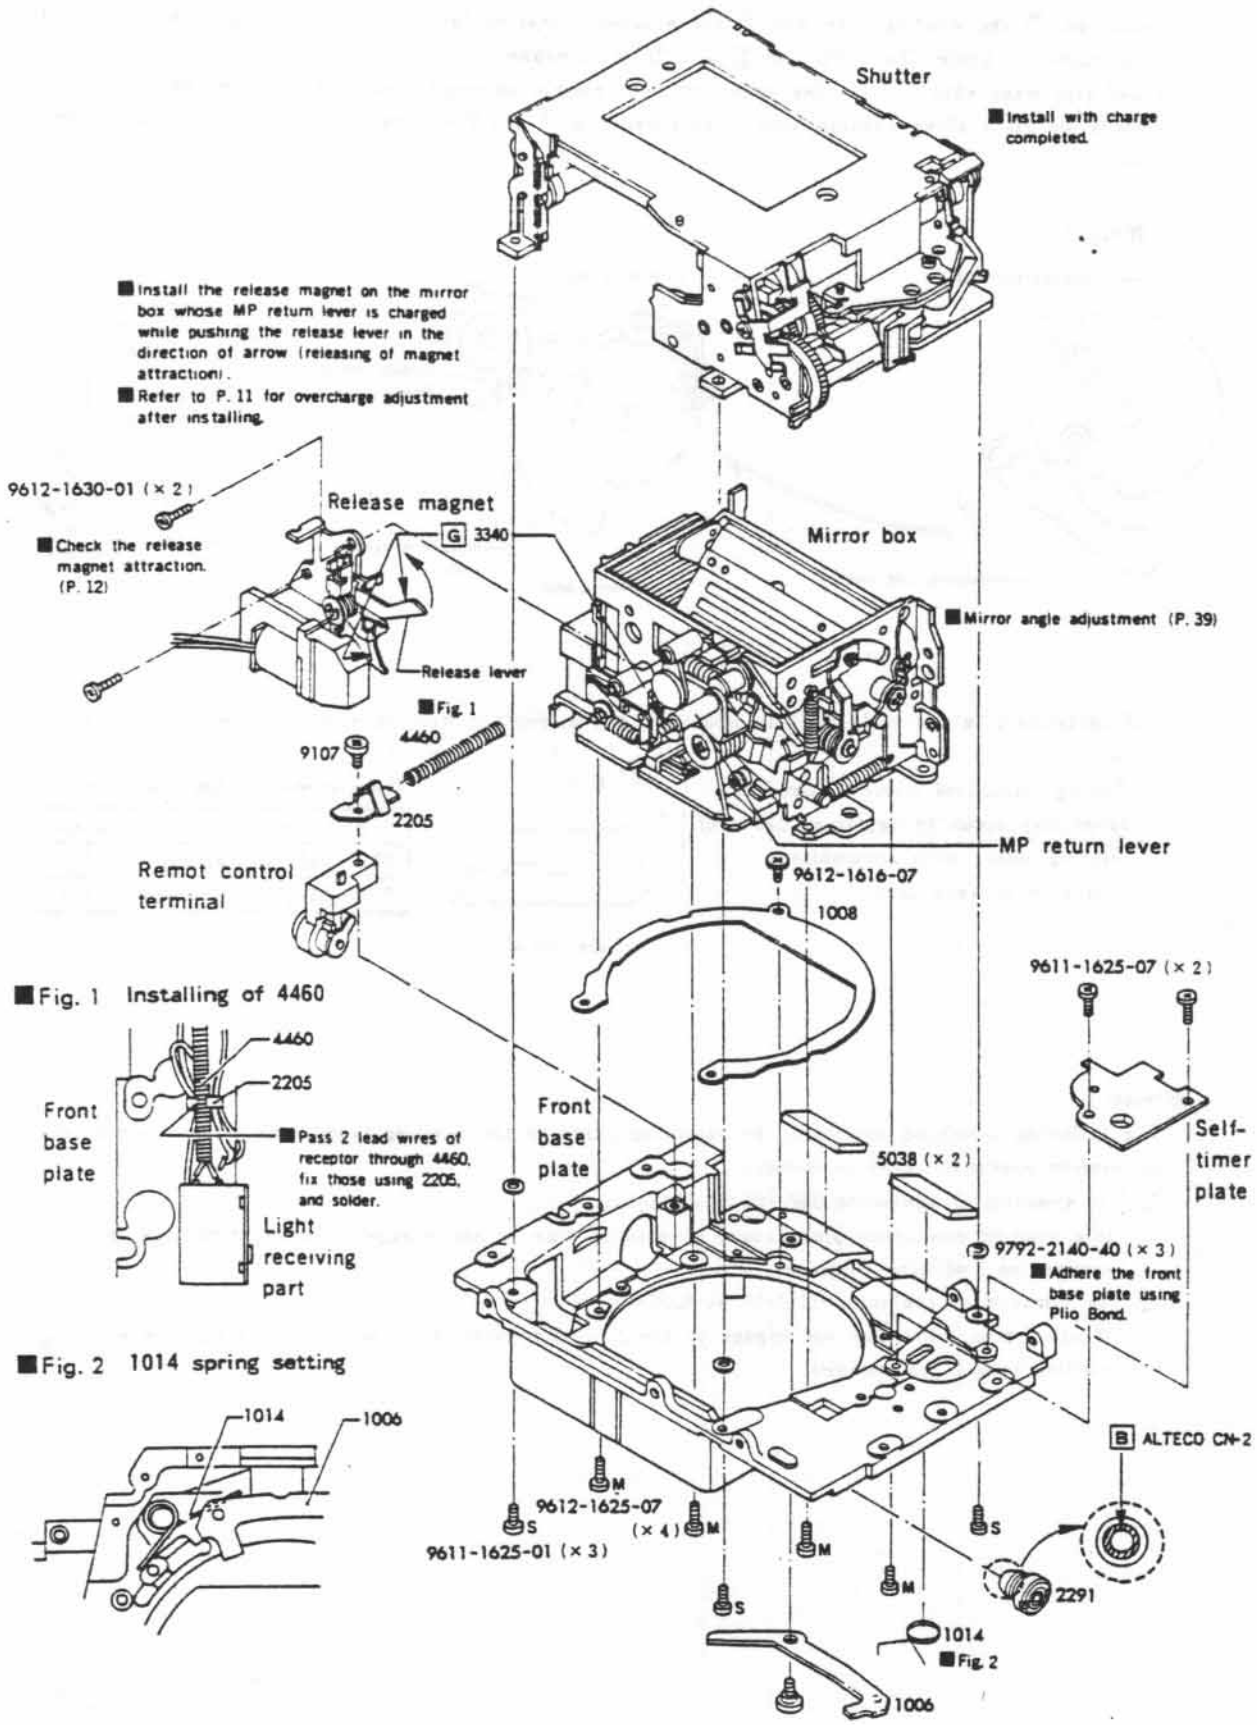

■Fig. 1 Installing of 4460

4460
2205
Front base plate
■Pass 2 lead wires of receptor through 4460, fix those using 2205, and solder.
Light receiving part

■Fig. 2 1014 spring setting

■ Release magnet attraction check

■ Measuring instruments : Constant voltage D.C power supply (Model 524B, E-1, E-2)
: Dial tension gauge (500 g, 300 g)

■ Checking procedure

■ Fig. 1 Attraction

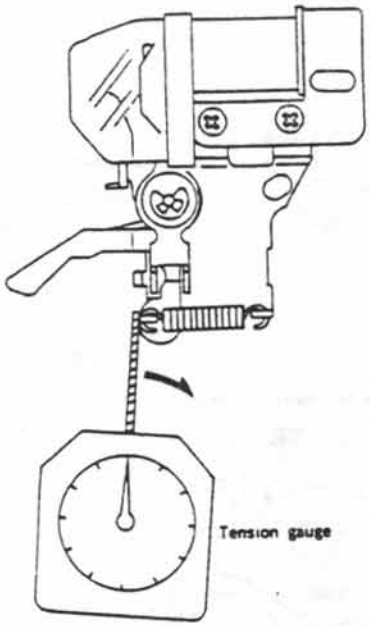

■ Fig. 2 Attraction

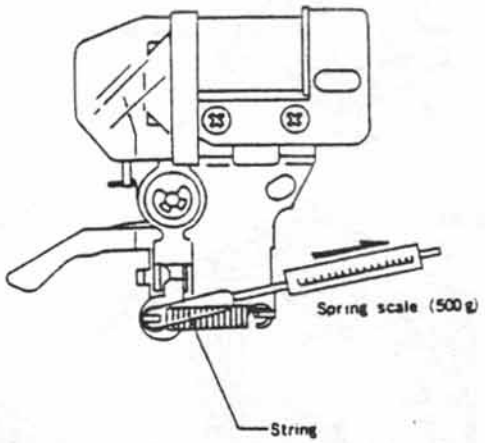

Standard	150 g or more

• Attraction check·····As shown in Fig. 1, set a tension gauge to the release magnet, and then check the value 3 times when the contact piece separates.
(If a tension gauge of more than 270 g is not available, a spring scale of about 500 g can be used instead as shown in Fig. 2)

■ Fig. 3 Separation voltage

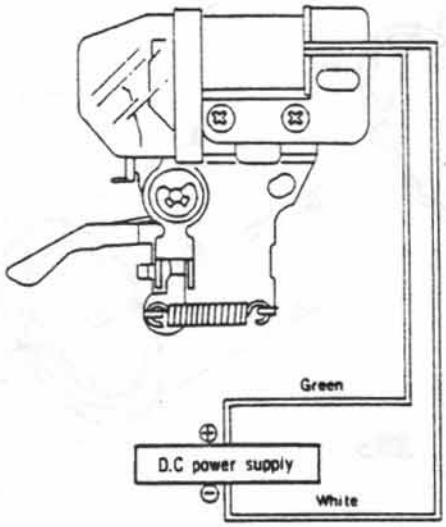

Standard	Separates at 1.8 V or less

• Separation voltage check···As shown in Fig. 3, connect to a D.C power supply and check to see if the contact piece separates at 1.8 V or less.

5 Front base plate block assembly-2

■Tight screws in order ①~③.

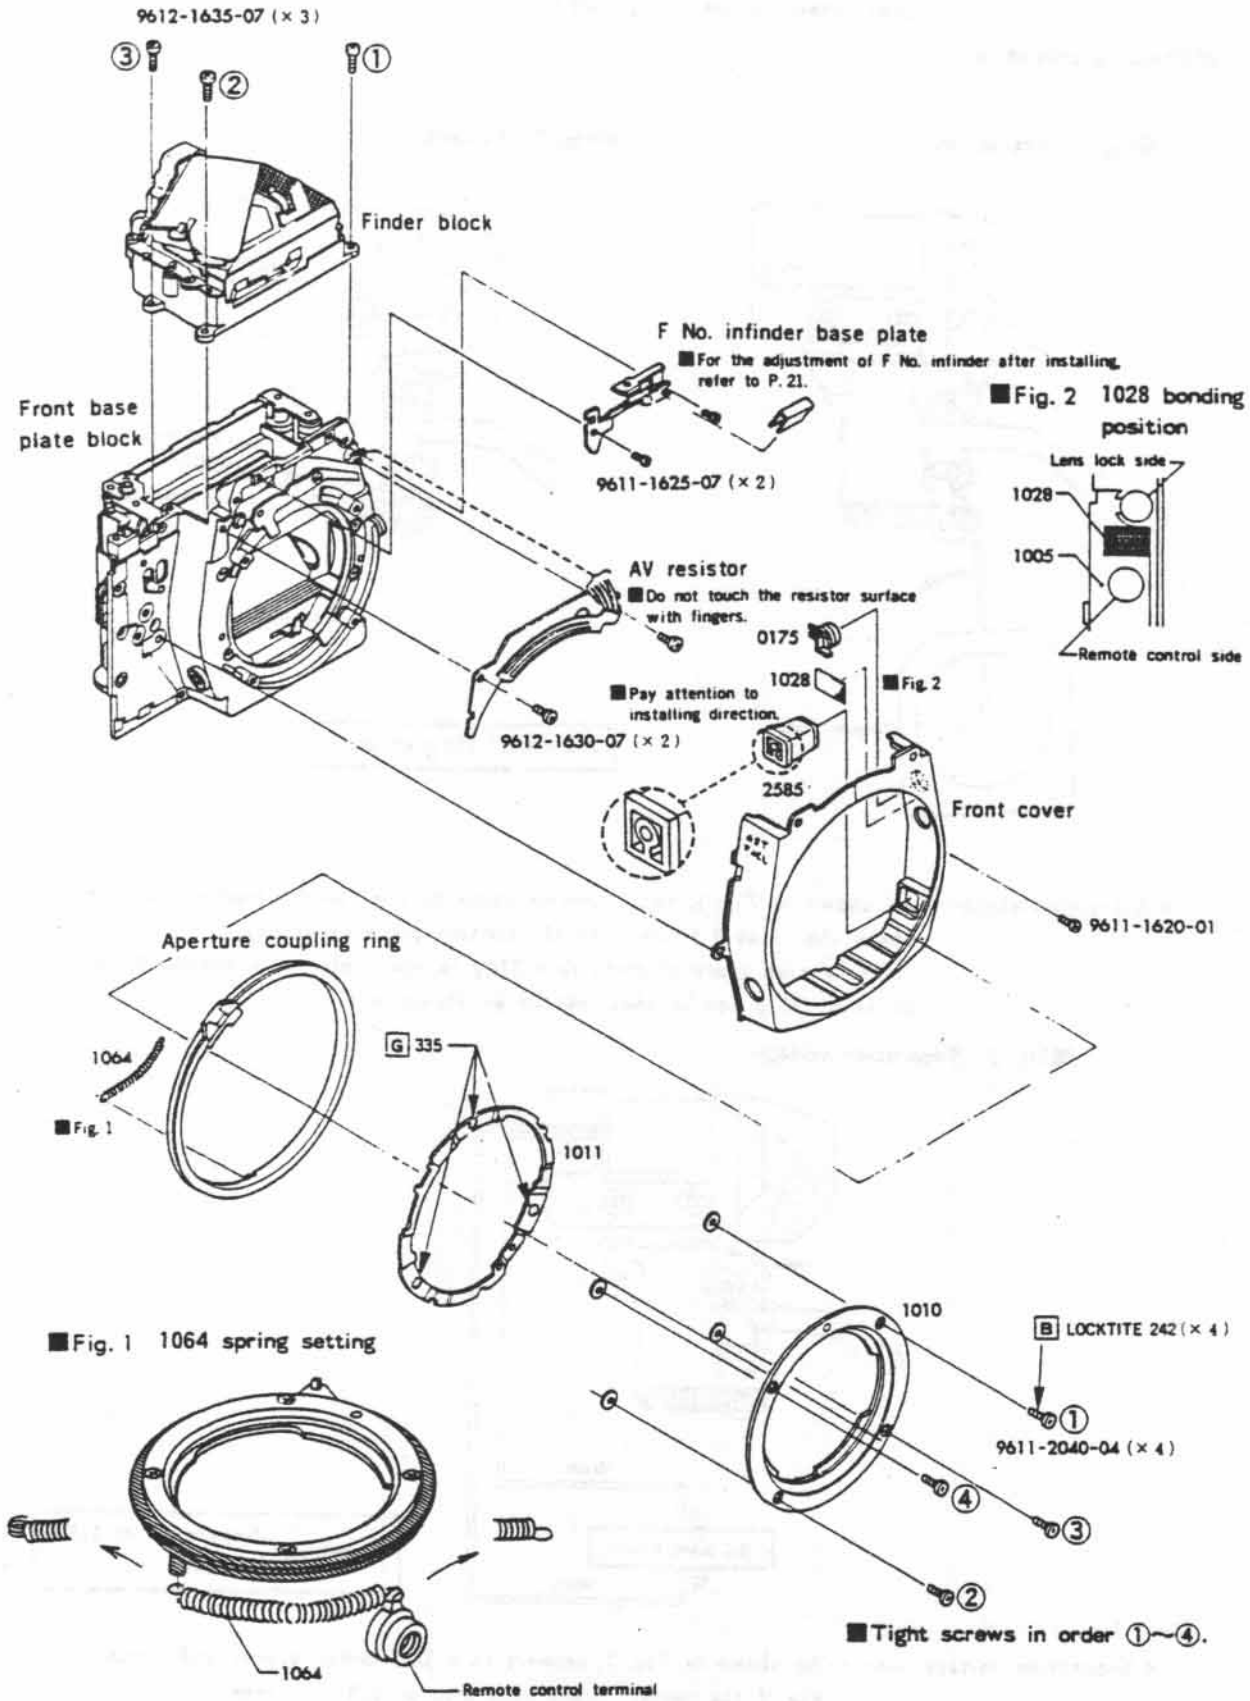

■Fig. 2 1028 bonding position

■Fig. 1 1064 spring setting

6 Front base plate block assembly

■After completion of assembly, perform the shutter gear position and shutter charge adjustments.
(P. 15, 16)

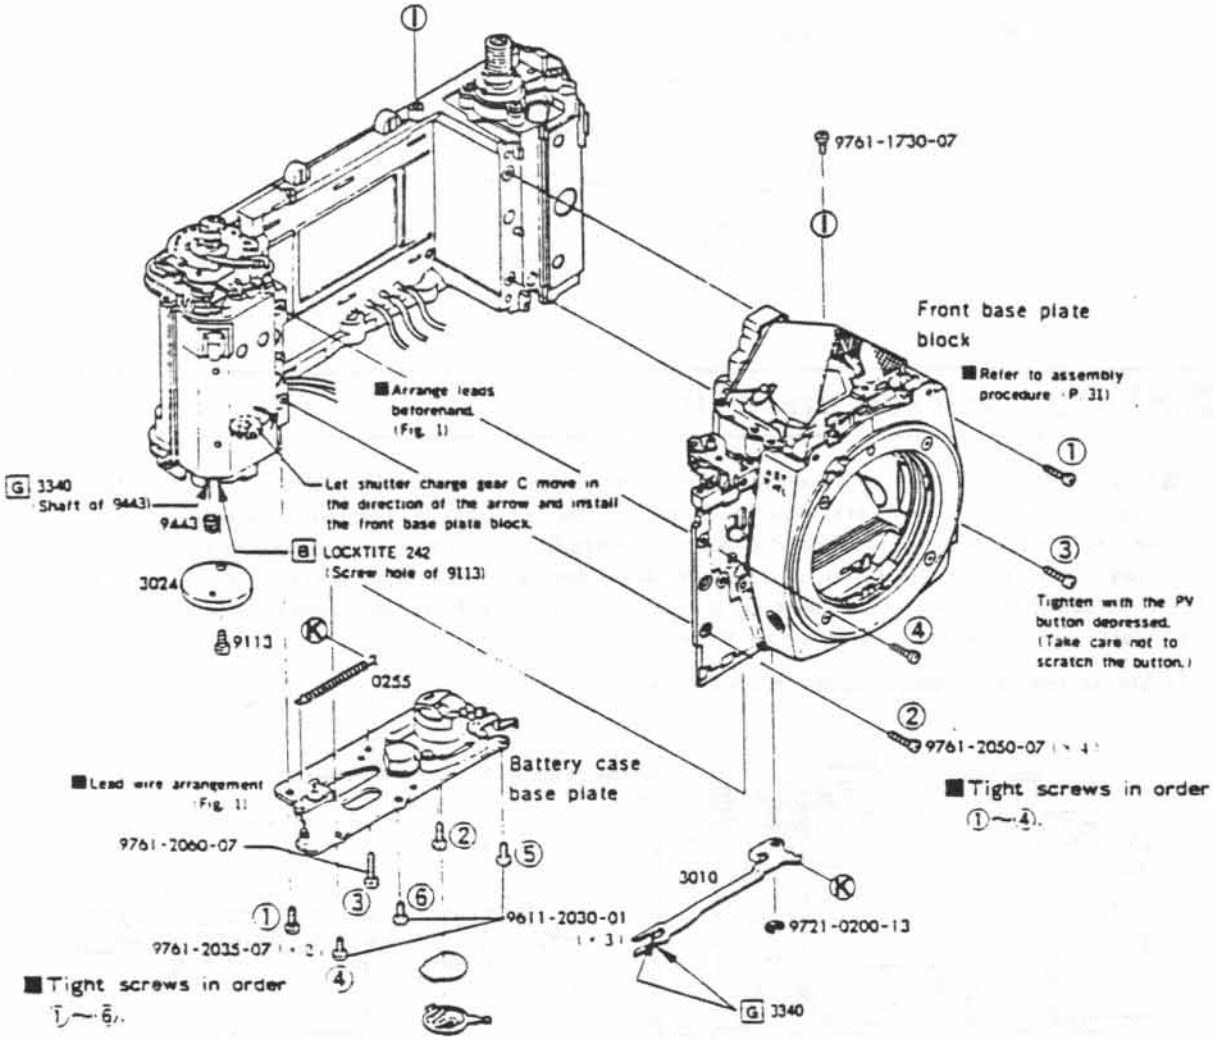
9761-1730-07
Front base plate block
■Refer to assembly procedure (P. 31)
■Arrange leads beforehand. (Fig. 1)
G 3340 (Shaft of 9443)
9443
Let shutter charge gear C move in the direction of the arrow and install the front base plate block.
B LOCKTITE 242 (Screw hole of 9113)
3024
9113
0255
Tighten with the PV button depressed. (Take care not to scratch the button.)
9761-2050-07 (×4)
■Tight screws in order ①~④.
■Lead wire arrangement (Fig. 1)
Battery case base plate
9761-2060-07
9611-2030-01 (×3)
9761-2035-07 (×2)
3010
9721-0200-13
G 3340
■Tight screws in order ①~⑥.

■Fig. 1
SW. 4 lead wire arrangement

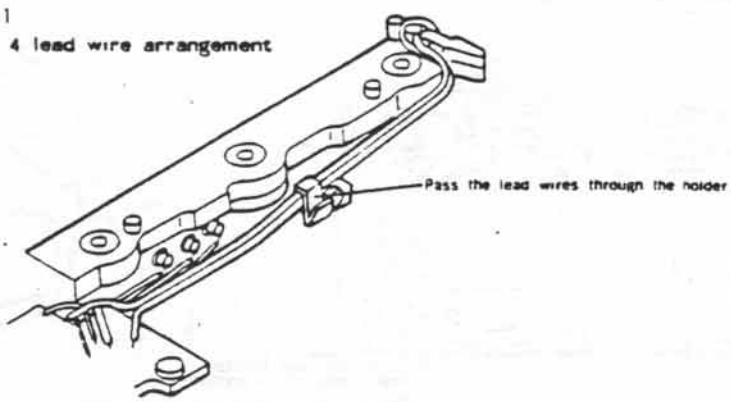

■ Shutter gear position adjustment

1. Engage the gears so that the mark of charge gear A faces the center of charge gear C, and tighten 9012. The gear engagement clearance should be 0.1~0.2 mm.

■Fig. 1

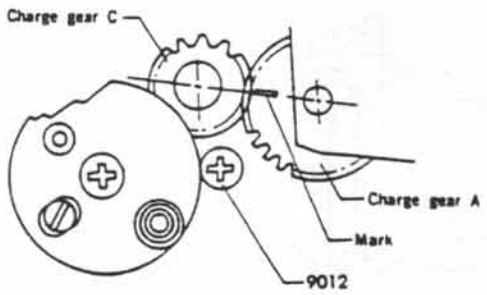

■ Shutter release procedure

■In this camera, the mirror operation mechanism is started with the separation of the release magnet (R Mag). Therefore, after mounting the shutter block on the body, the shutter cannot be released unless the flexible P.C board is installed with the wiring completed. For this reason, the shutter should be released by the following method when performing any checking or adjustments, such as for winding, mirror box, shutter release, etc., after assembling the front base plate block as shown on P. 14.

[1] By using a release tool (2017-0003-75)

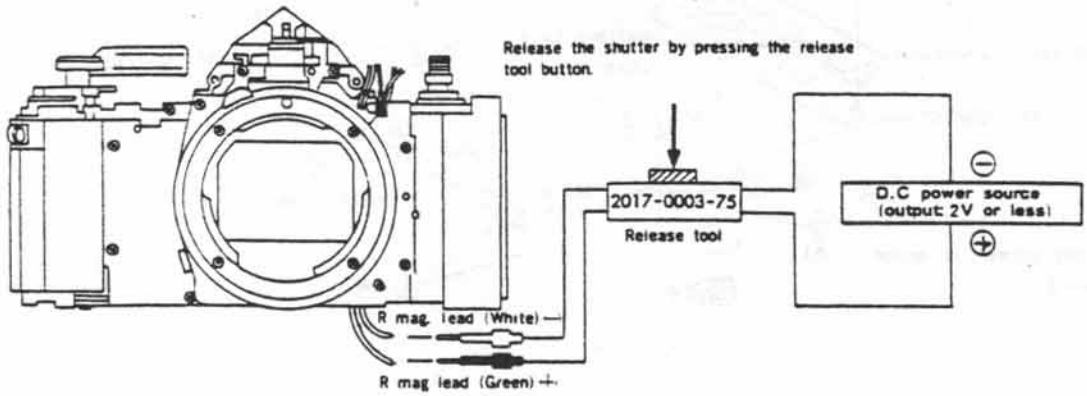
Release the shutter by pressing the release tool button.
2017-0003-75
Release tool
D.C power source (output 2V or less)
R mag. lead (White)
R mag lead (Green)

[2] By using a battery

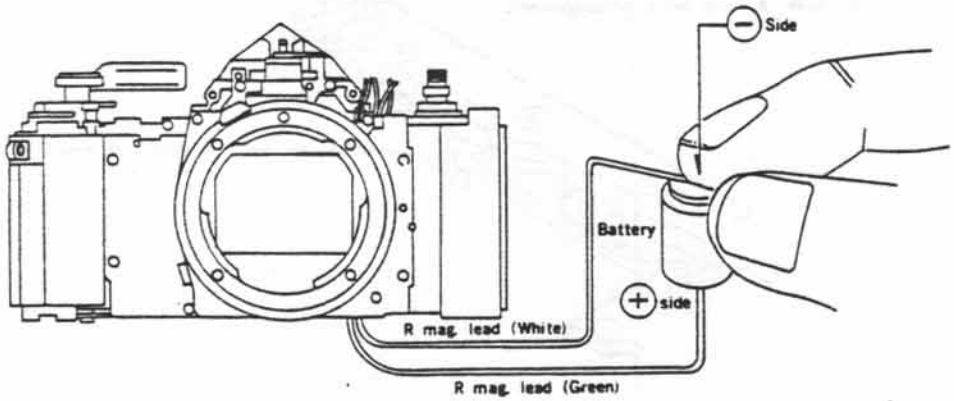

■Caution: In both methods [1] and [2], supply power until the completion of shutter operation. (Otherwise the shutter tester may fail to give a correct indication.)

■ Shutter charge adjustment

1. Slowly turn the film advance lever and check the over-charge from the time the 2nd curtain is stopped (the 2nd curtain stop lever moves from Ⓐ to Ⓑ, as shown below) until the film advance lever stops by checking the movement of the sprocket idler gear.

■Fig. 1

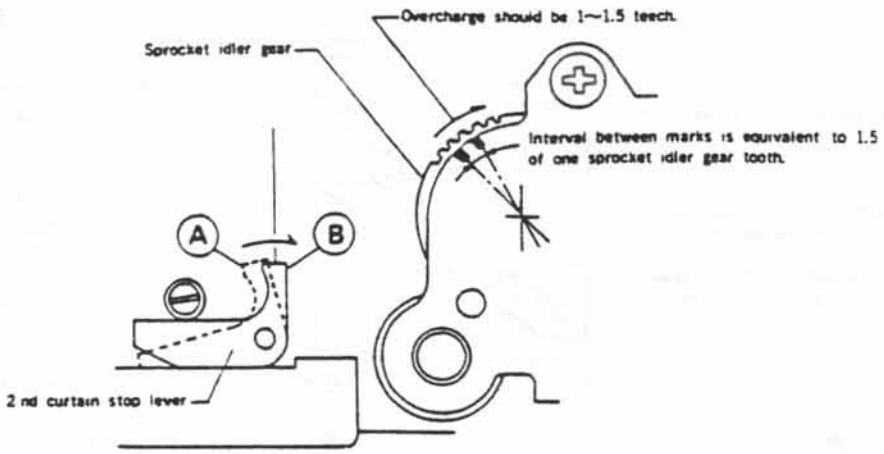
Overcharge should be 1~1.5 teech.
Sprocket idler gear
Interval between marks is equivalent to 1.5 of one sprocket idler gear tooth.
A
B
2 nd curtain stop lever

Caution : If the winding operation is not smooth, or if the overcharge exceeds two teeth, immediately stop winding and adjust.

■Adjustment procedure

- Overcharge is less than 1 tooth·····Turn the eccentric pin (9281) counterclockwise.
- Overcharge is over 1.5 teeth ·····Turn the eccentric pin (9281) clockwise.

■Fig. 2

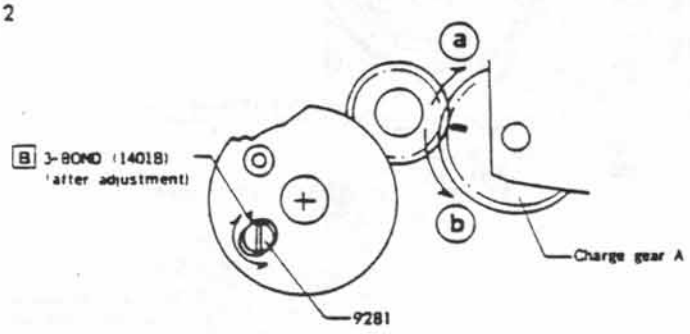

- If the adjustment by the eccentric pin is not sufficient, shift charge gear A by one tooth. (In the case of an undercharge, shift it in the direction of (a), and in the case of an overcharge, in the direction of (b), as shown in Fig. 2.)

7 Flexible P.C board installation

■ After installing the flexible P.C board and soldering the lead wires, carry out the adjustment of P. 19~29.

■ If the shutter block has been disassembled, adjust it before mounting the circuit board. (P. 36)

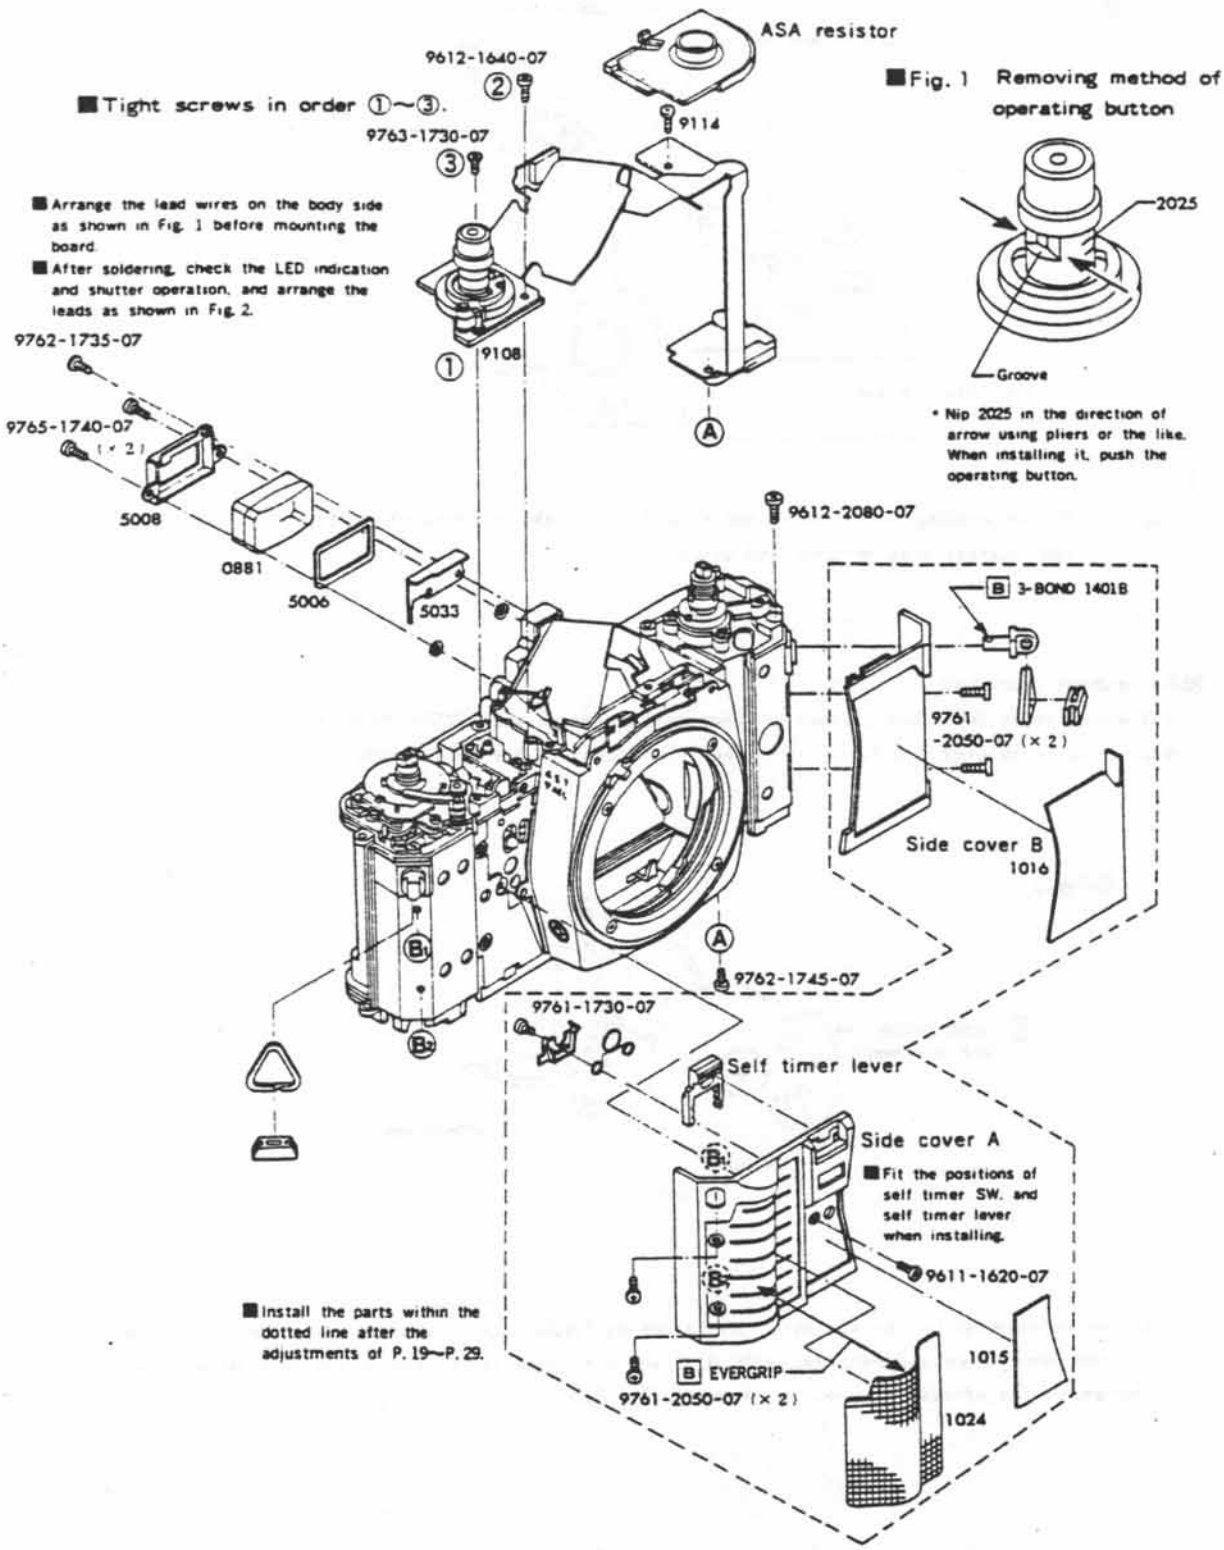
ASA resistor
9612-1640-07
■ Tight screws in order ①~③.
9763-1730-07
9114
9108
■ Arrange the lead wires on the body side as shown in Fig. 1 before mounting the board.
■ After soldering, check the LED indication and shutter operation, and arrange the leads as shown in Fig. 2.
9762-1735-07
9765-1740-07 (× 2)
5008
0881
5006
5033
9612-2080-07
B 3-BOND 1401B
9761 -2050-07 (× 2)
Side cover B 1016
9762-1745-07
9761-1730-07
Self timer lever
Side cover A
■ Fit the positions of self timer SW. and self timer lever when installing.
9611-1620-07
B EVERGRIP
9761-2050-07 (× 2)
1015
1024
■ Install the parts within the dotted line after the adjustments of P. 19~P. 29.
■ Fig. 1 Removing method of operating button
2025
Groove
* Nip 2025 in the direction of arrow using pliers or the like. When installing it, push the operating button.

■ Preparation for adjustments

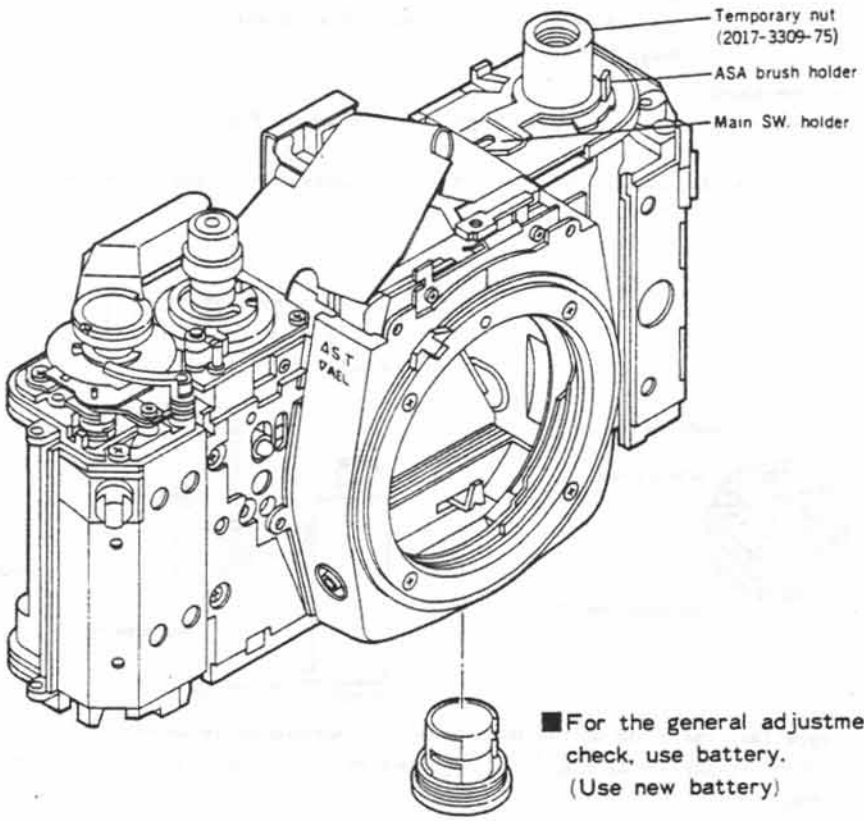

■For the general adjustment or check, use battery.
(Use new battery)

■ Body back adjustment

■Measuring instruments : Body back gauge
: Flat plate (for 2005)
: Dial gauge

■Adjustment procedure

Check and correct the flatness of the pressure plate contact surface before measuring the body back.

〔Standard〕 $43.72^{+0.01}_{-0.02}$ mm

■Fig. 1

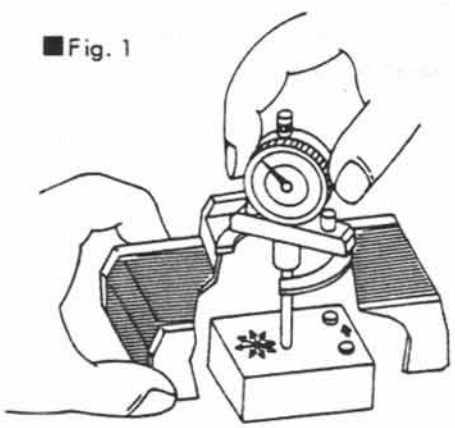

- If the body back is lower than the standard value, insert adjusting washers under the bayonet mount.

〔Types of adjusting washers〕

Part No.	2005-1061-81	2005-1062-81	2005-1063-81
Thickness (mm)	0.02	0.05	0.1

- If the body back is higher than the standard value, replace the bayonet mount with the bayonet mount used for repair (2017-1010-81) and adjust in combination with the adjusting washers.
The flange of the bayonet mount used for repair is 0.1 mm thinner than that of the regular bayonet mount (2017-1010-01).

■ Viewfinder back adjustment

■ Measuring instruments : 1000 mm collimator (Model RC-1000 Ⅰ, Ⅱ, Ⅲ)
: Master lens for 054 finder back adjustment (054-5202-79)
: Magnifier

■ Adjustment procedure

1. Set the camera so that the chart image is as shown in Fig. 1, and set the scale of the master lens to 43.565.
   • After setting the master lens, turn it counterclockwise to put aside the looseness to one side.

■ Fig. 1



■ Fig. 2

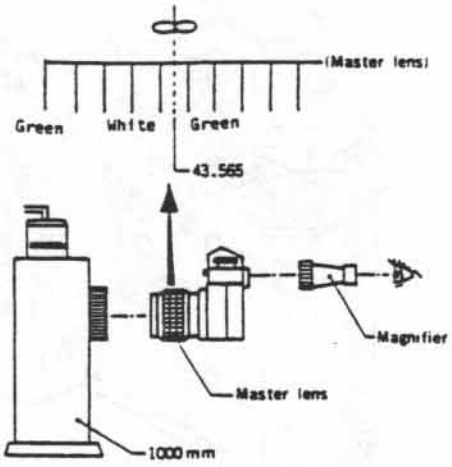

2. Make sure that the scale of the master lens is positioned as shown in Fig. 2, and move the 3 adjusting screws of Fig. 3 up and down uniformly to adjust the vertical line of the chart image.

■ Fig. 3

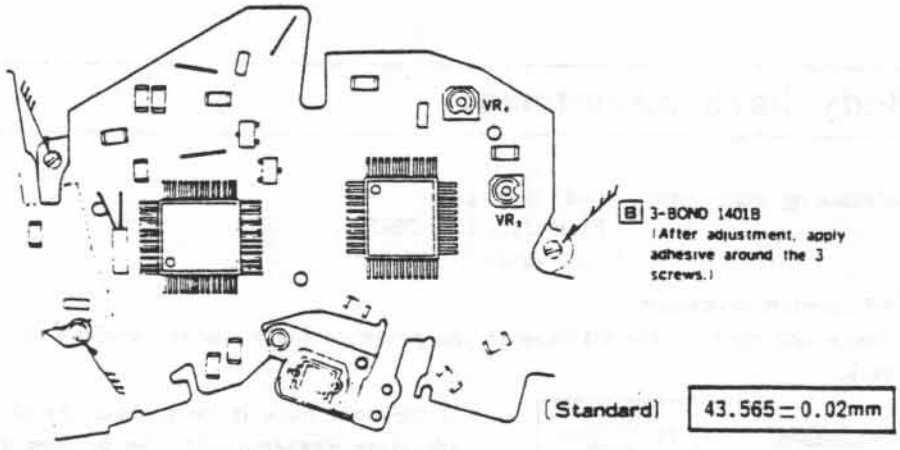

   • If the microprism is partially obscure, adjust the vertical balance by using the screws, taking care not to deflect the vertical line of the chart image.

3. When the helicoid of the master lens is turned to adjust the focus after operating the shutter several times, the scale position of the master lens should be as follows:

■ Fig. 4 Allowable range



■ Check and adjustment of release lock voltage and LED blink voltage

■ Check

[1] Release lock voltage	Standard	2.46±0.1 V
[2] LED blink voltage	Standard	2.56±0.1 V

• In case of out of standard above, adjust those as following procedure.

■ Measuring instruments : Constant voltage D.C power source (MODEL 524B, E-1, E-2)
: Digital multimeter (Type 2508, 3476, 2507)
: Direct current tester

■ Checking procedure

1. Check the current consumption at B setting (incl'd * indication) using measuring instruments as follows.

■ Fig. 1

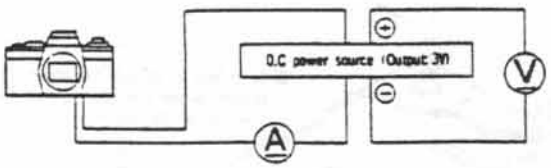

• Camera
Shutter dial : B
Touch SW : ON
Connection of power source : ⊕···Battery case contact
⊖···Batter case base plate

2. Measure the release lock voltage while reducing slowly the voltage of D.C power source from 3V.
3. Choose a proper resistor (R_{11}) for B.C from the graph (next page) according to measured value (Checking procedure 1 & 2), and solder it on portion A or B in Fig. 2.
• Note···Measuring temperature should be within the range of 25±5°C.

■ Fig. 2

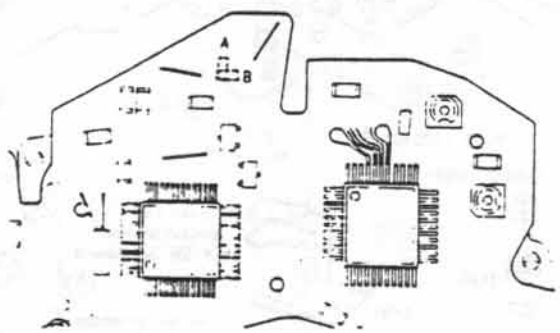

■ Checking high and low shutter speed limits

■ Measuring instrument : Shutter tester (Model S-2101, FS-1DMN4)

1. High shutter speed limit (shutter speeds in other than high luminance operation in A mode.)
• Check the shutter speed with the shutter dial set to A.

Standard	0.69~1.38 ms

2. Low shutter speed limit (shutter speeds in other than low luminance operation in A mode.)
• Set the shutter dial to A, and then check the exposure time with light to the receiver interrupted.

Standard	Within 5 sec.

■ Shutter assembly- I

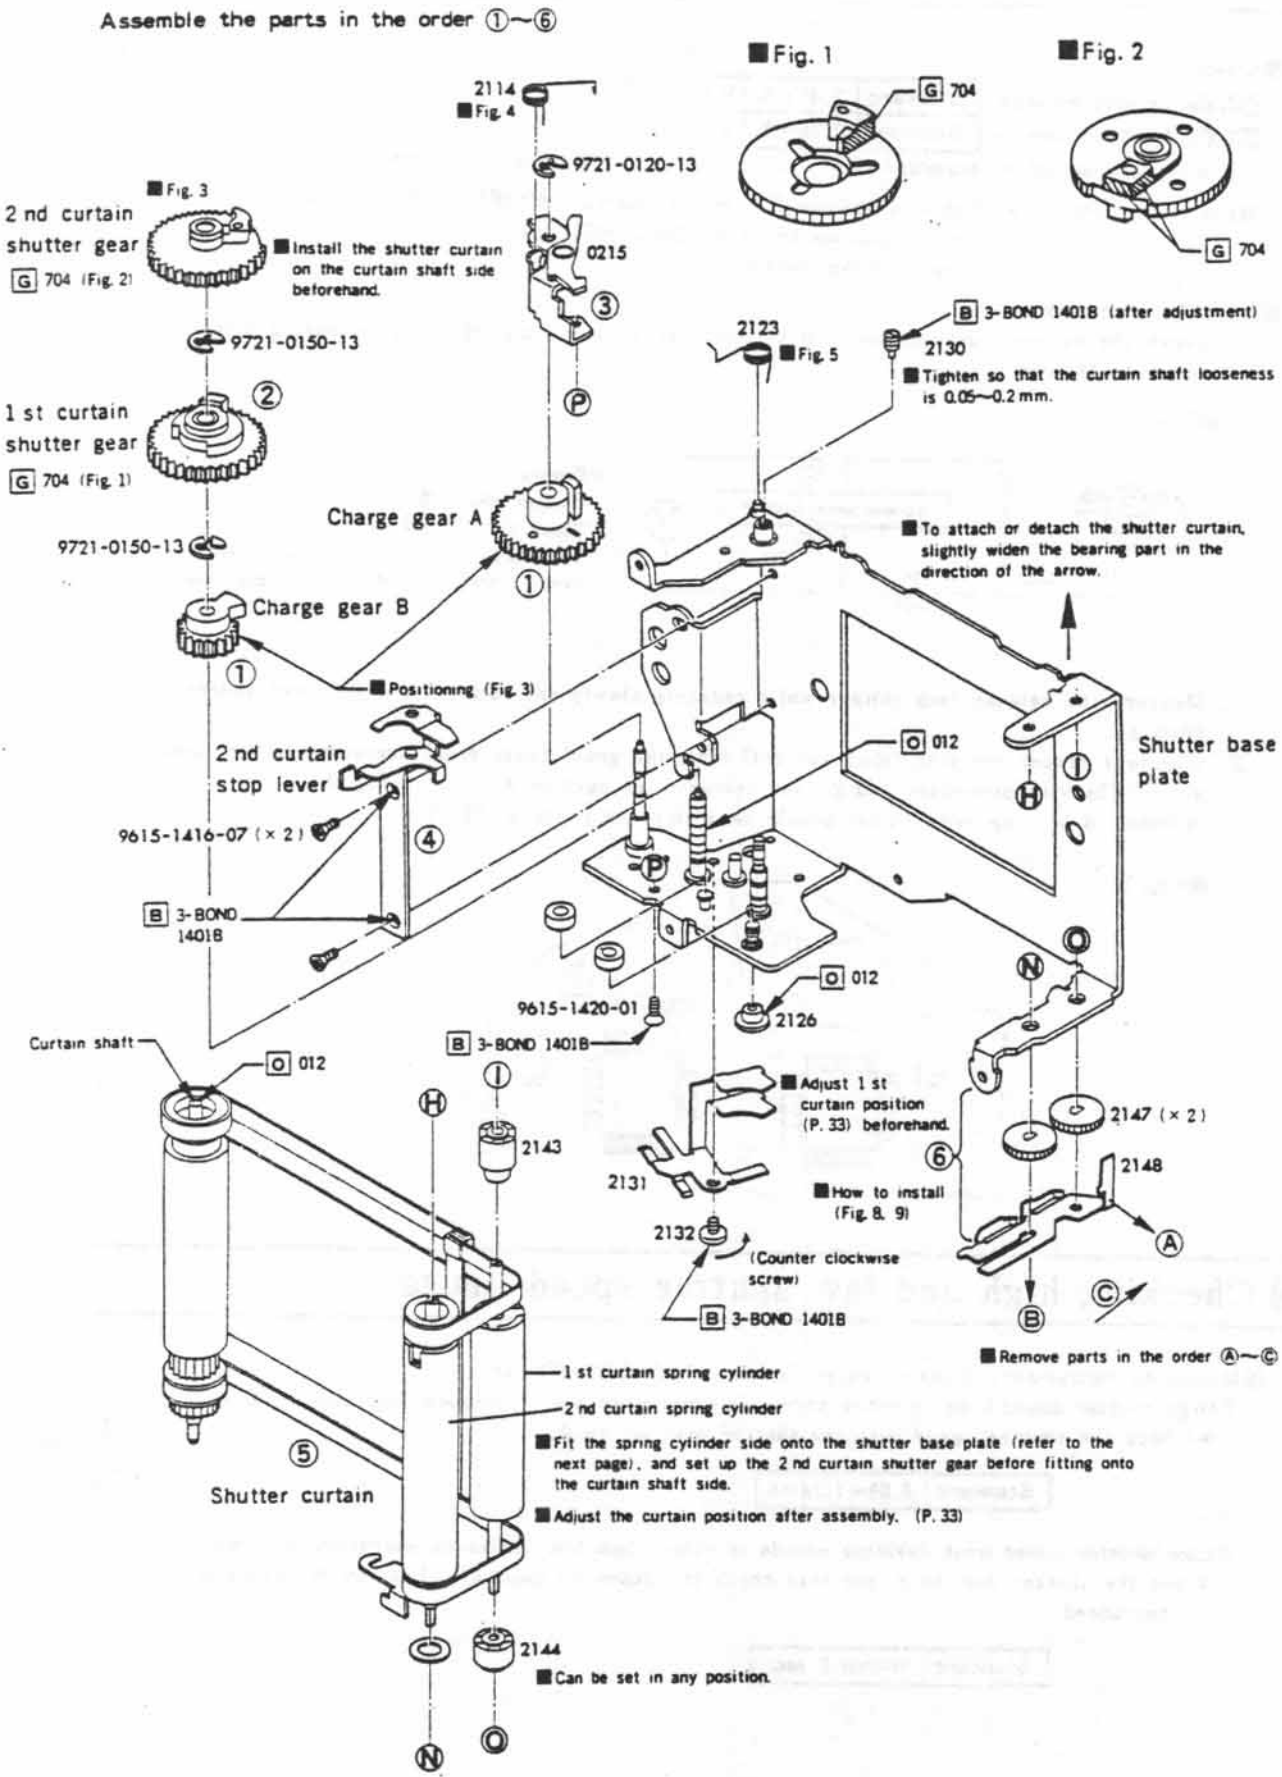
Assemble the parts in the order ①~⑥
■ Fig. 1
■ Fig. 2
G 704
G 704
2114
■ Fig. 4
9721-0120-13
■ Fig. 3
2 nd curtain shutter gear
G 704 (Fig. 2)
■ Install the shutter curtain on the curtain shaft side beforehand.
0215
③
9721-0150-13
2123
■ Fig. 5
B 3-BOND 14018 (after adjustment)
2130
■ Tighten so that the curtain shaft looseness is 0.05~0.2 mm.
1 st curtain shutter gear
G 704 (Fig. 1)
②
Charge gear A
9721-0150-13
■ To attach or detach the shutter curtain, slightly widen the bearing part in the direction of the arrow.
Charge gear B
①
■ Positioning (Fig. 3)
2 nd curtain stop lever
O 012
Shutter base plate
9615-1416-07 (× 2)
④
B 3-BOND 14018
9615-1420-01
O 012
2126
B 3-BOND 14018
Curtain shaft
O 012
■ Adjust 1 st curtain position (P. 33) beforehand.
2147 (× 2)
2143
2131
2148
■ How to install (Fig. 8, 9)
2132
(Counter clockwise screw)
B 3-BOND 14018
■ Remove parts in the order Ⓐ~Ⓒ
1 st curtain spring cylinder
2 nd curtain spring cylinder
■ Fit the spring cylinder side onto the shutter base plate (refer to the next page), and set up the 2 nd curtain shutter gear before fitting onto the curtain shaft side.
⑤
Shutter curtain
■ Adjust the curtain position after assembly. (P. 33)
2144
■ Can be set in any position.

■ 1st curtain position adjustment

1. Turn the 2 nd curtain cylinder to stop the 2 nd curtain halfway. (Fig. 1)
2. Turn the 1 st curtain shutter gear counterclockwise until it touches the stopper. Then turn the 1 st curtain cylinder counterclockwise to position the 1 st curtain slit as shown in Fig. 2.

■Fig. 1

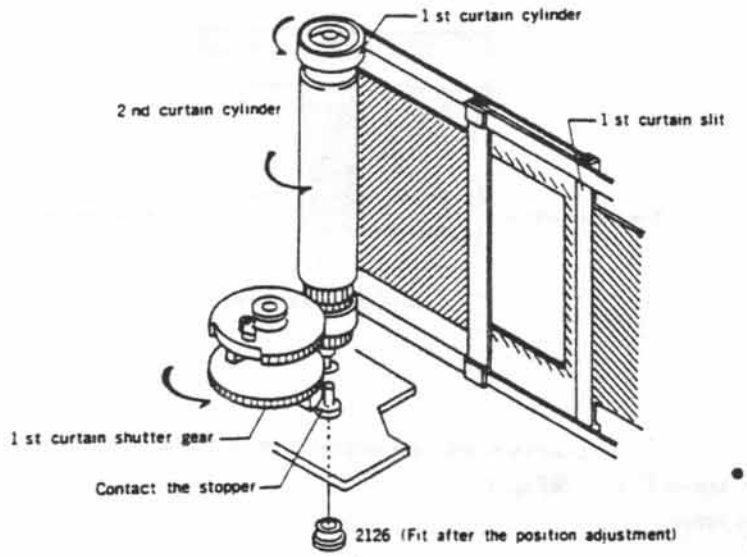
1 st curtain cylinder
2 nd curtain cylinder
1 st curtain slit
1 st curtain shutter gear
Contact the stopper
2126 (Fit after the position adjustment)

■Fig. 2 1 st curtain position (with its travel completed)

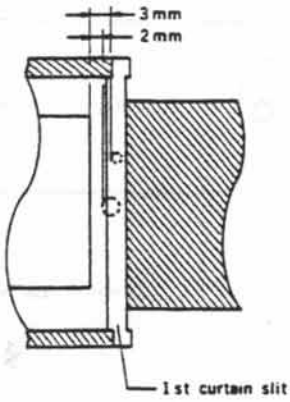

• Adjust so that the 1 st curtain slit is positioned 2.5~3 mm from the picture frame.

3. Holding the 1 st curtain cylinder to prevent deflection of the position show in Fig. 2, fit 2126 and stop it with 2131 (curtain ribbon guide plate……P. 31). After that, check for deflection of the position (Fig. 2)

■ 2nd curtain position adjustment

1. Shift the 2 nd curtain shutter gear upward and turn it to the position shown in Fig. 3. Turn the 2 nd curtain cylinder clockwise and hold it in the position shown in Fig. 3.

■Fig. 3

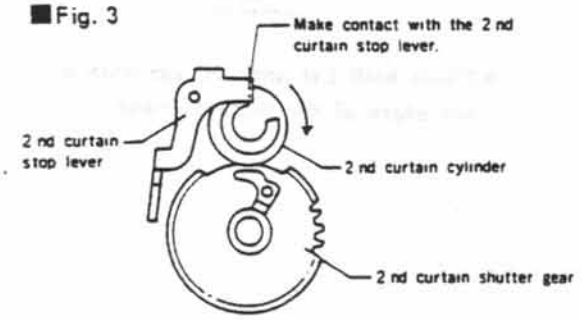

■Fig. 4

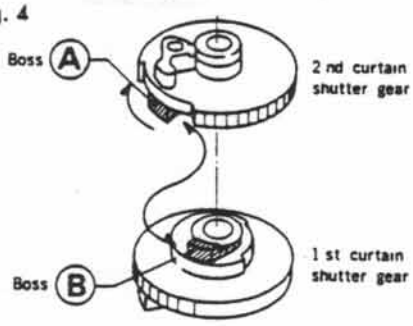

2. Turn the 2 nd curtain shutter gear (Fig. 3) clockwise while pressing it down (slightly applying a force to the 2 nd curtain cylinder clockwise) so that boss Ⓐ is engaged with boss Ⓑ.
3. Check to be sure that the 2 nd curtain slit is positioned as shown in Fig. 5.

■Fig. 5 2 nd curtain position (with its travel completed)

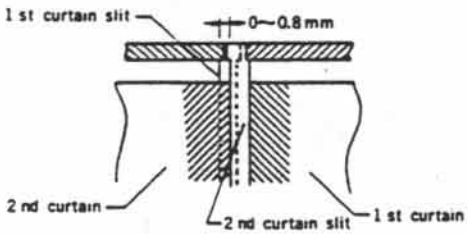

■ Checking curtain stop position (with winding completed)

[1] 1 st curtain stop position

■ Fig. 1 (Slit remaining in picture frame)

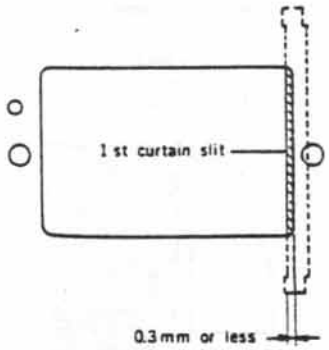

■ Fig. 2 (Overlaping of the curtains)

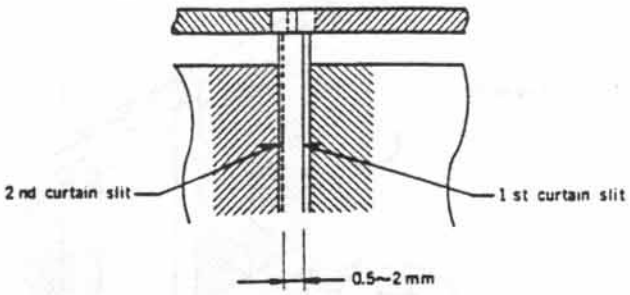

[2] 2 nd curtain stop position

(check while letting the 1 st curtain travel.)

■ Fig. 3 (Deflection from reference hole)



[3] Curtain tilt (deflection from picture frame)

■ Fig. 4



• Check both 1 st and 2 nd curtains at the edges of the picture frame.

■ Mirror box assembly-I

• Dilute one part of anti-diffusion agent (FC-721) with ten parts of solvent (FC-77).

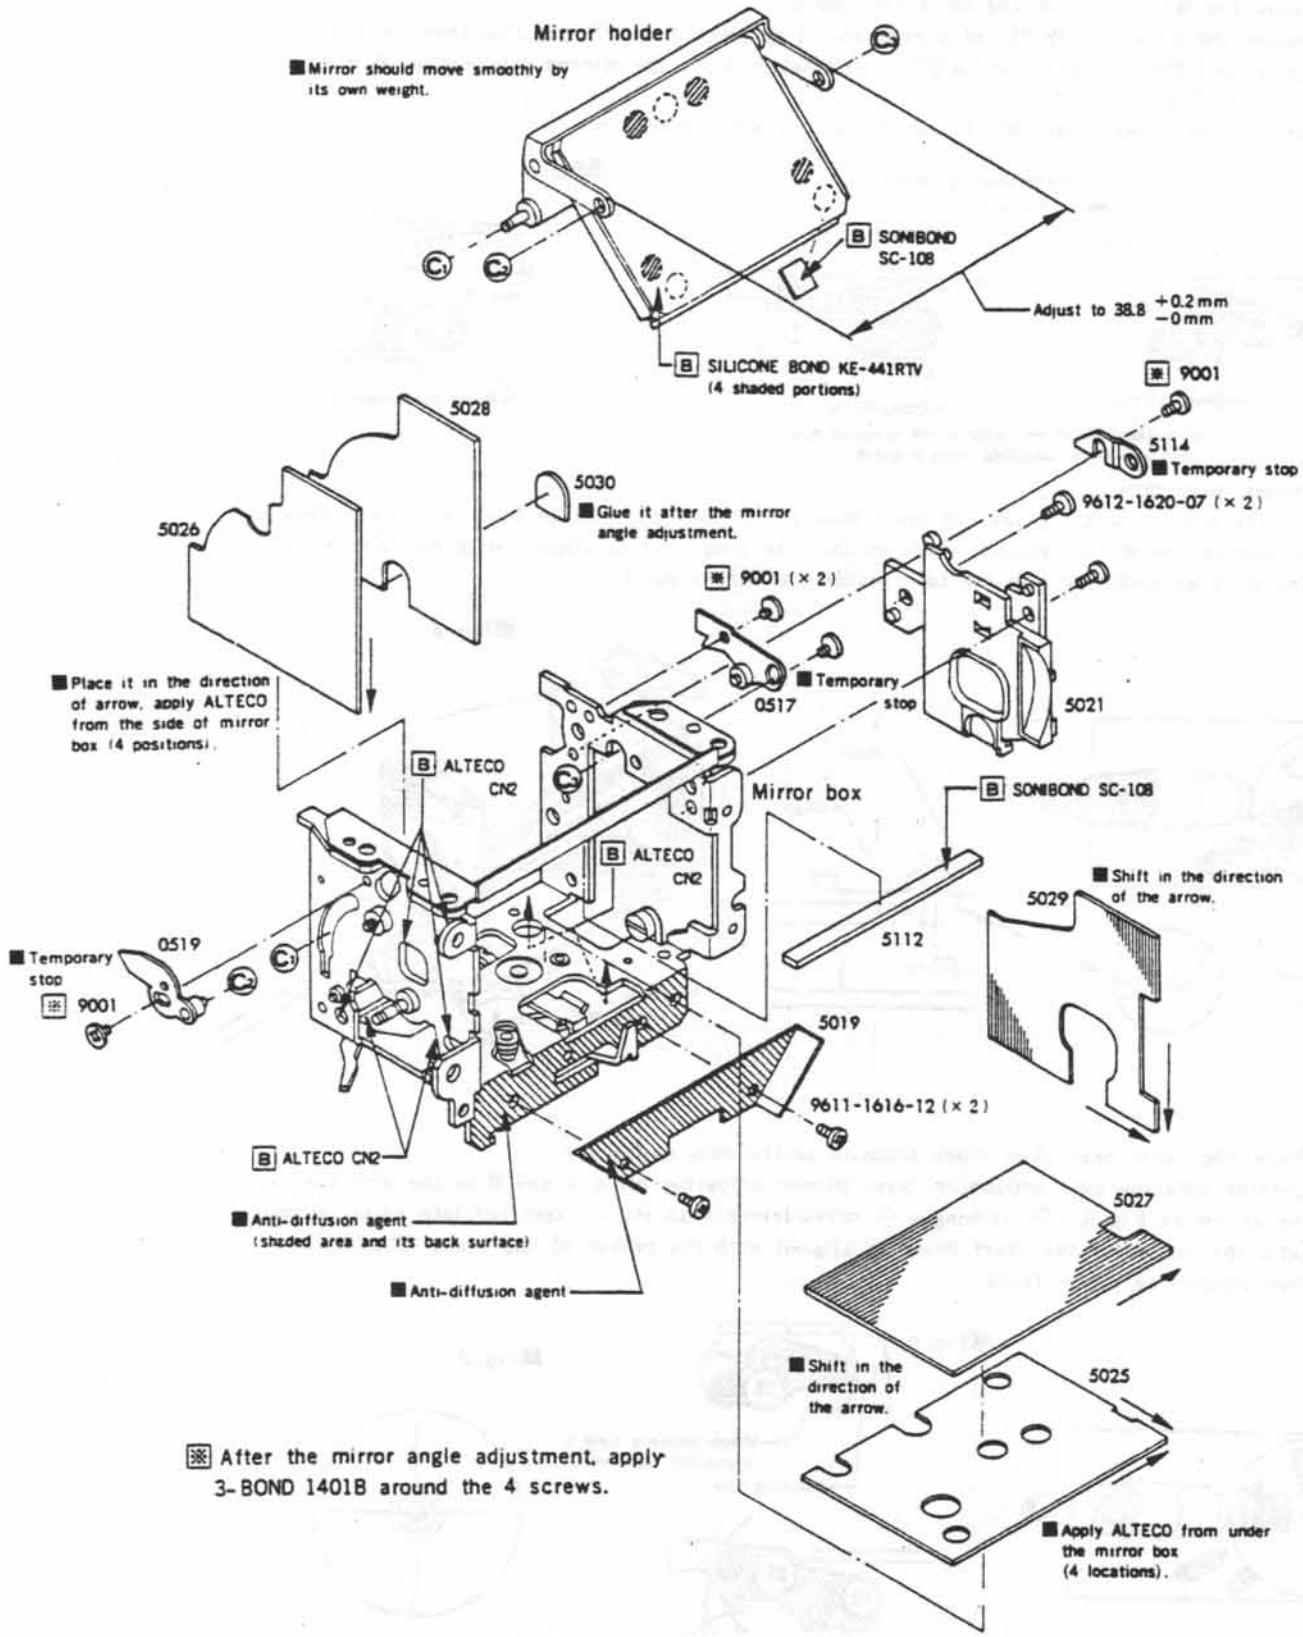

※ After the mirror angle adjustment, apply 3-BOND 1401B around the 4 screws.

■ Mirror angle adjustment

■ Measuring instrument : Mirror angle adjuster (Model MA-Ⅲ, Ⅱ)

■ Prepations

1. Mount the mirror box on the fornt base plate.
2. Loosen the setscrew (9001) of mirror adjusting plate A and B, position them as shown in Fig. 1, and then slightly tighten 9001. Completely shift the mirror sub-stopper-B down as shown in Fig. 2.
3. Set the front base plate block onto the mirror angle adjuster.

■ Fig. 1

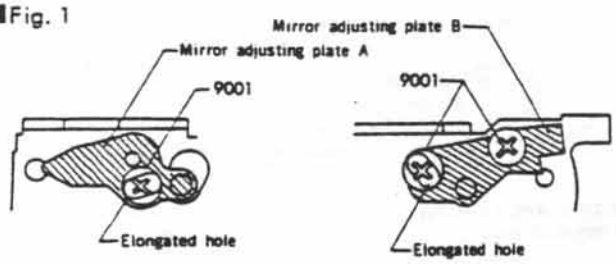

● Position 9001 at the center of the elongated hole for both mirror adjusting plates A and B.

■ Fig. 2



■ Adjustment procedure

1. Set the mirror height gauge and front base plate block opposite to each other and adjust by turning the mirror stopper shaft so that the gauge end is aligned with the mirror end. (Insert a screwdriver into the hole beside the mirror box.)

■ Fig. 3

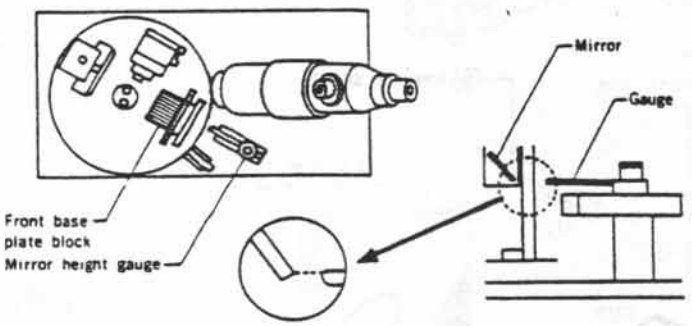

■ Fig. 4

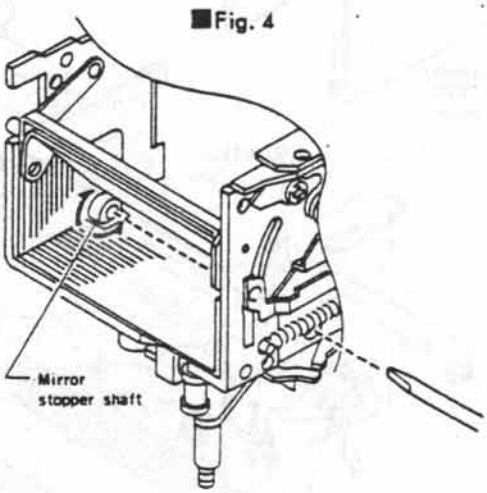

2. Place the front base plate block opposite to the auto collimator.
   Looking into the auto collimator, move mirror adjusting plate A and B in the direction of the arrow in Fig. 6. (By turning a ⊕ screwdriver with its tip inserted into adjusting hole) until the center of the chart image is aligned with the center of the cross (Fig. 7), and then tighten setscrew (9001).

■ Fig. 5

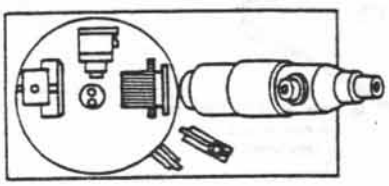

■ Fig. 6

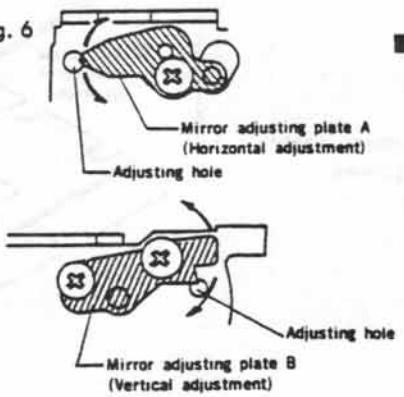

■ Fig. 7



3. Push up the mirror sub-stopper-B until its end lightly touches the mirror operation lever pin, and then tighten the setscrew.

■Fig. 8

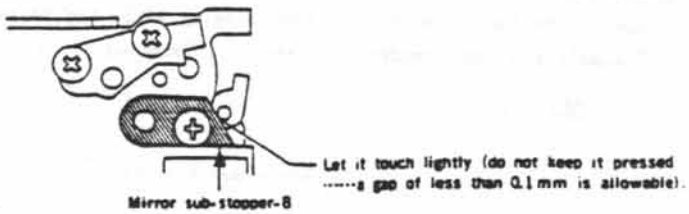

4. Operate the mirror several and make sure that the chart image is within the standard 45° ± 10′

■Fig. 9



• 45° ± 10′ ··· 10′ circle must be in touch with the cross (vertically and horizontally).

• If it is not within the standard 45° ± 10′, perform adjustments 1–3 again.

5. After completing the adjustment, apply screw-lock (3-BOND 1401B) to the screw head of mirror adjusting plates A, B, and the mirror sub-stopper, and adhere the flare prevention sheet B (5030··· P. 37)

■ Sub materials

■Grease
- ≒3340
- ≒335
- ≒704

■Oil
- ≒012

■Anti-diffusion agent
- FC-721
  (Dilute with solvent FC-77 by 1 : 10)

■Adhesives
- 3-BOND 1401B
- PLIOBOND
- SILICON-BOND KE-441RTV
- ALTECO CN2
- LOCKTITE 242
- SONIBOND SC-108
- EVERGRIP

■Cleaner
- FLONSOLVE

■ Focusing plate replacement procedure

■For view finder cleaning without camera disassembly or focusing plate replacement follow the procedure given below.

■Removal

Insert the tweezers between the focusing plate and focusing plate holder A.
Slightly tilt the tweezers to raise the focusing plate for removal.

■Fig. 1

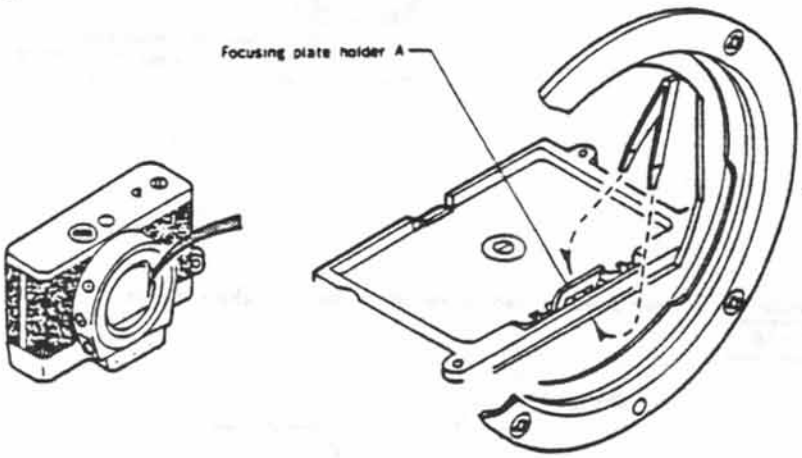

■Mounting

Hold the focusing plate as illustrated: fit part Ⓐ onto the bend of focusing plate holder B; press down arrow-marked part Ⓑ; and insert projection Ⓒ into the hold of focusing plate holder A.

■Fig. 2

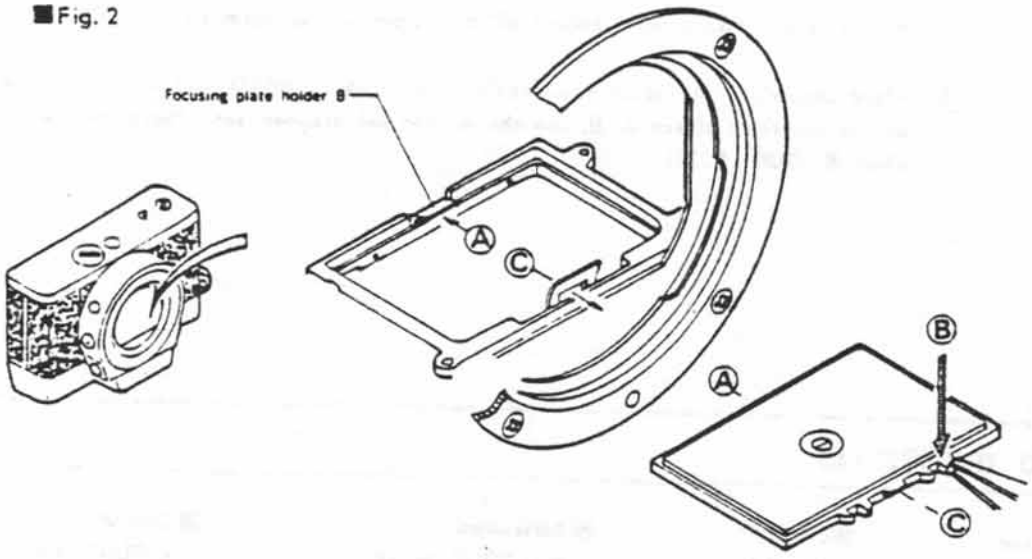

■Mounting check

After mounting the focusing plate, check that the view finder back and EE level are correctly positioned.

TROUBLE-SHOOTING

1. Use of Trouble-shooting

1. This trouble-shooting chart describes symptoms and causes of troubles found on the camera side.
2. Even when trouble is found on the camera side, its cause is not always attributable to the malfunction of the camera in relation to the exchangeable lens, winder, motor drive and exclusive flash. Therefore, use this trouble-shooting chart upon confirmation of trouble on the camera after checking combined performance with the accessories according to claim contents.

2. Description

1. Trouble described here is due to a single case only. Trouble due to a plurality of causes should be checked collectively on the basis of the causes listed in this chart.
2. This trouble-shooting deals mainly with electrical causes, as well as covering part of mechanical causes.

3. Servicing Precautions

1. Type 2507 digital multimeter is basically used for measurement. Any other kind of measuring instrument, however, may be used, if its minimum input impedance is more than 10MΩ.
2. Use this tester for voltage checks and a tester of less than 3 V for measuring conduction.
3. Trouble is most unlikely to occur in electronic parts, such as ICs, diodes, transistors, resistors, and capacitors. Therefore, check the cause of trouble, with the focus on the defective soldering of lead wires and electrical parts, and switching contacts.
4. When checking soldered or plated parts, avoid pressing the parts or pulling lead wires unnecessarily.
5. Since voltage measuring parts are narrow, mount a pin or something similar at the tip of an alligator clip for measurement.
6. When measuring switching patterns, special care should be taken so that the patterns outside switch operation are free from flaws. For switch contacts, measure their base, which is not directly affected by contact pressure.
7. Be sure to turn off the power switch before removing electrical parts (when a constant-voltage regulated power supply is used).
8. The ideal temperature range for the soldering iron tip is 290°C to 340°C. If the temperature is higher, however, perform soldering quickly. Also, be sure to clean the chip when soldering.

4. Description on Trouble-shooting Table and Trouble-shooting Chart

4-1. Trouble-shooting Table

1. From symtom, trouble cause can be found.
2. The Trouble-shooting Table combines the "INDEX" and summary of details of "Trouble-shooting Chart.
   Accordingly, use those properly as the needs of the case demand.

4-2. Trouble-shooting Chart

1. The chart presents the checkpoints to be followed from the symptom to finding the cause of trouble.
2. The voltage for each checkpoint is the value when SW_0 or SW_1 is ON upon completion of film winding (before releasing). It is a potential difference from ⊣ of power supply.
3. For all trouble symptoms other than "Electromagnetic release does not operate," check their cause, assuming that the electromagnetic release operates properly.
4. The chart shows the check in the ⬚ is done by operation and in the ▭ by measurement.

5. Repair procedure

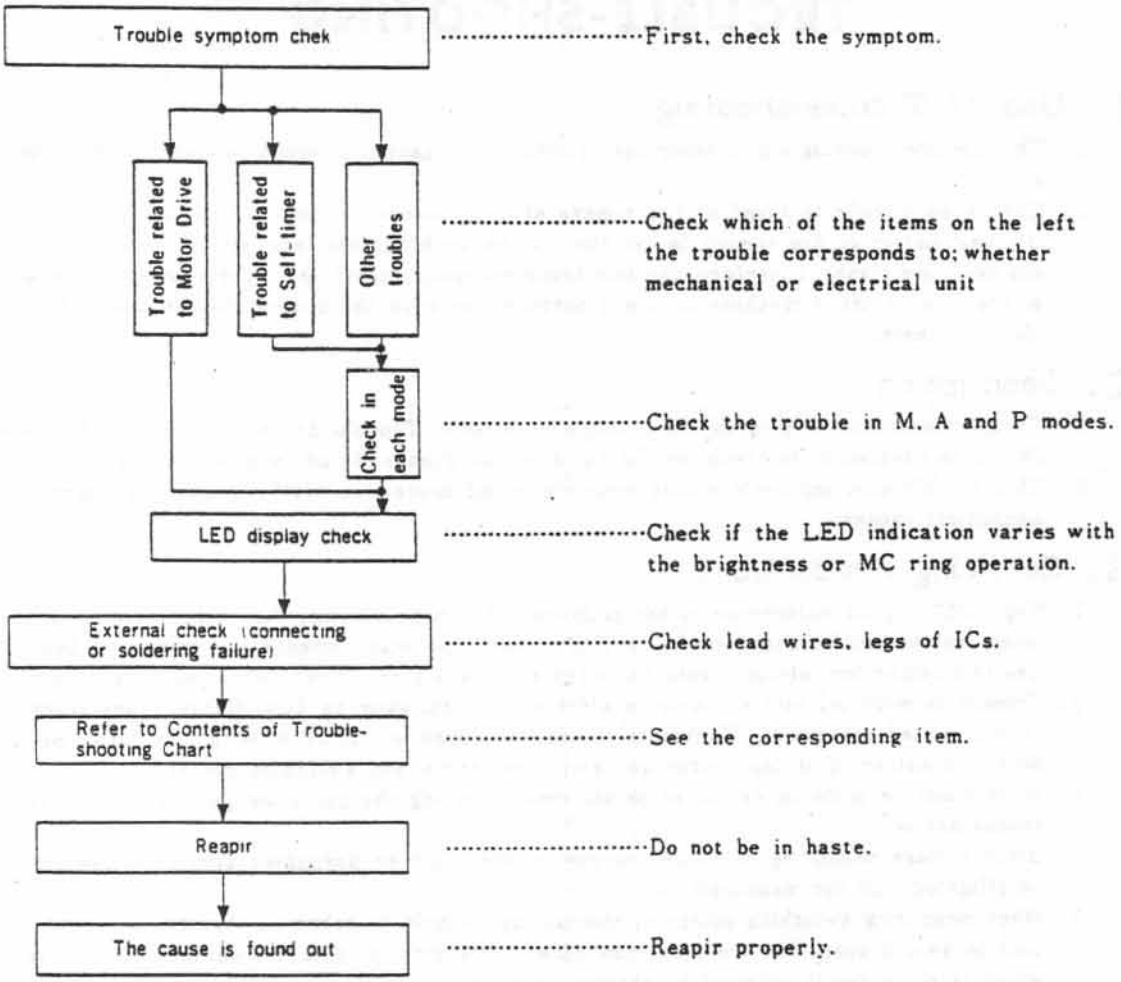
Trouble symptom chek
First, check the symptom.
Trouble related to Motor Drive
Trouble related to Self-timer
Other troubles
Check which of the items on the left the trouble corresponds to; whether mechanical or electrical unit
Check in each mode
Check the trouble in M, A and P modes.
LED display check
Check if the LED indication varies with the brightness or MC ring operation.
External check (connecting or soldering failure)
Check lead wires, legs of ICs.
Refer to Contents of Trouble-shooting Chart
See the corresponding item.
Reapir
Do not be in haste.
The cause is found out
Reapir properly.

6. Battery Capacity Check

1. A 100Ω resistor is paralleled with the battery at normal temperature (25±25°C), as illustrated. A digital multimeter or voltmeter is connected to the battery in parallel to the resistor to measure the voltage. In this case, be sure to perform quick measurement.
2. The battery, with its voltage more than 1.4 V, is regarded as normal.

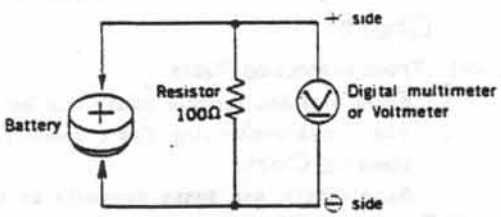

INDEX

370

for Trouble-shooting Table/Chart

Ⅰ. Trouble related mechanism (Winding and shutter releasing are impossible)·····P. 6, 7

A Returning winding lever to original position after winding completion, shutter curtains return to position of shutter released.
B Appearing of shutter curtain slit.
C Charge operation plate set does not return at winding completed.
D Others

For the cause or repairing method related meachanism trouble, refer to Trouble-shooting Chart.

★Explanation of Trouble-shooting Table

1. ○ of number of SW. or Lead Wire shows·····Shortcircuit with GND.
   (e.g. SW-④·····Shortcircuit SW_4 and GND)
2. ⬭ of IC or Others shows shortcircuit between····· • IC pins.
   • Joint part and printed wiring.
   (e.g. IC_1 (40-41) ·····Shortcircuit IC_1 40 and 41
   SPC (A-K) ····· Shortcircuit SPC anode and cathode)
3. ○ of others shows····· Shortcircuit by elements failure.
4. Only numeral without any marks shows;
   For SW·····Contact failure.
   Others·····Cold soldering or disconnection.

Ⅱ. Trouble related electro unit

Symptom	Cause	Page	SW	Lead Wire	VR	SL	R	C	Q	J (Jump lead)	IC-1	IC-2	OTHERS
Shutter release failure	No LEDs light, shutter is not released···Release impossible even with Main SW. (S_4) ON→OFF→ON operation.	8	6	22(Red)					1	2	37, (40-41)	21, 29, (11-12) (43-44) (44-45)	Joint part a-c XL
	LEDs remain light, and shutter is not released with release SW.(S_2) ON···Release impossible even with Main SW.(S_4) ON→OFF→ON operation.	8	2, ④	㉑(Yellow) 36(Grey)			12		4	4, 5		43	
	With release SW.(S_2) ON, LEDs go out, but shutter is not released···Release impossible, and LEDs light with Main SW.(S_4) ON→OFF→ON operation.	8		32(Green) SL_1(Green, White, (White))		1	7	7	2		10, 11	15	
	Shutter is not released with remote control SW.(S_{13}) ON···Release possible with operating button operation.	9		10(Grey) 39(Black)									
	Shutter is not released even though self-timer LED lights with metering SW. (S_8 or S_1) ON···No finder LEDs light.	9								1	39		
	Main SW.(S_4) ON makes shortcircuit, resulting in shutter release impossible and no lighting LEDs.	9		⑬(Red)									Joint part (b-c)
	Main SW.(S_4) and metering SW.(S_8 or S_1) ON make shortcircuit, resulting in release impossible and no LEDs lighting.	9					⑨	④					
	After shutter releasing with Main SW.(S_4) ON→OFF→ON, relaese impossible and no LEDs light.	9	4	21(Yellow)								42, (45-46)	
	Shutter is released when winding up.	9	②, ⑬	⑩(Grey), ㊳(Grey) ㉘(Grey)									Remote control shortcircuited
	LEDs light and, shutter release is impossible with Main SW.(S_4) OFF.	9											Joint part (a-c)
Finder indication failure	No LEDs light with metering SW.(S_8 or S_1) ON···Shutter operates normally.	10	0, 1	35(Brown)			9					37, 49	Joint part 1
	No LEDs light with metering SW.(S_8 or S_1) ON···Shutter stays open with self-timer LED ON when released.	10										14	
	Only "M" does not light.	10										50, (49-50)	Joint part 2
	Part of LEDs does not light.	10										1~9, 50~56	Joint part 2~17
	Self-timer LED lights with Main SW.(S_4) ON.	10		⑱(Grey)							(12-13)		
	LEDs light with Main SW.(S_4) ON.	10	① ⑯	⑫(Yellow) ㊴(Brown)									
	LEDs light by Main SW.(S_4) ON with shutter speed dial set at 30~1000 or A.	10										(36-37)	
	When voltage is under specified B.C voltage, shutter release lock does not operate with LEDs ON.···No mode LED blinks.	11									3	23	
	When decreasing voltage, mode LED remains ON; does not blink···No LEDs light when release locked.	11									2	24	

Symptom		Cause	Page	SW	Lead Wire	VR	SL	R	C	Q	J (Jump lead)	IC-1	IC-2	OTHERS
Shutter failure	Shutter curtains travel in high speed, or without slit	LED indication is normal. Shutter curtains travel without slit in M and A modes.	11		13(Red) 14(White)		2			3	3		30	
		In A mode shutter operates in high speed with △ blinking. (1) LED indication remains the same when changing AV, film speed and luminance.	11		7 (Green) ⑦(Green)	1 (SV) 4 5		3	3 9			6, 8, 14, 17, 27, 28, 29, 33 (4-5) (5-6) (6-7) (7-8) (13-14) (14-15) (15-16) (23-24) (26-27) (32-33)	17 19	
		(2) LED indication remains the same only when changing AV.	12		3 (Orange)	②(AV)								
		(3) LED indication remains the same only when film speed changing.	12		6 (Brown)									
		(4) LED indication does not change in accordance with luminance.	12									(21-22)		SPC 1-(A-K)
		LEDs are normal. In M and A modes shutter curtains travel without slit when set to high speed.	12	3	15(Orange)								12	
		In A and M modes, shutter speed remains 1/60 with LEDs "M" and "1/60" lighting.	12											Looseness of auto lock button guide (2017-9018-01)
		LED indication is normal. Occasional high shutter speed under darkness.	12									7	18	
	Shutter remains open	LED indication is normal. Shutter stays open in M and A modes···Slow shutter speed limit, 4 sec., does not operate.	13	③	⑭(White), ⑬(Orange)							(41-42)	(25-26)	
		In A mode, shutter stays open with ▽ blinking···Slow shutter speed limit does not operate. (1) LED indication remains the same when AV, film speed, and luminance changing.	13		4 (Blue), ④(Blue) ⑤(Brown), ⑥(Brown)	2(AV) 6		4				15, 16, 21, 22, 25, 26, 30, 34 (8-9) (16-17) (24-25) (27-28)		Crack of SPC 1 AV resistor plate
		(2) LED indication remains the same only when changing AV.	13		5 (Brown)									
	Others	In A mode, LED indication and shutter speed operate as slow shutter speed···Over exposure. (1) LEDs and shutter speed remain the same only when film speed changing.	14		8 (Orange) (6-7) (3-4)	1(SV)						(29-30)		
		(2) LEDs and shutter speed remain the same when AV and film speed changing.	14		(6-8) (3-5)							32		
		In M mode, shutter does not operate in accordance with speed set by shutter speed dial···LEDs indicate operating shutter speed.	14											Refer to Trouble-shooting Chart
		Excessive deflection of LED indication and shutter speed from AV and film speed setting.	14		③(Orange) ⑧(Orange)									
Self-timer failure		Shutter release without delay···No self-timer LED blinks.	15	10	11(Blue)								40	Looseness of self-timer P.C board screw
		Shutter release without delay···Self-timer LED blinks after shutter release.	15									(9-10)	(15-16)	
		Shutter release with delay for 10-sec.···No self-timer LED blinks.	15		16(Grey), 17(Green)			6				9, 12	16	Shortcircuit beween anode of LD-17 and GND
		Shutter release impossible with self-timer···Self-timer LED does not blink.	15									13		
		Shutter operates in high speed with self-timer in A mode.	15									(8-9)	(16-17)	
		Shutter release with delay for 10-sec., locking AE.	15										(40-41)	Shortcircuit of printed wiring on self-timer P.C board
		Self-timer operates always.	15	⑩	⑪(Blue)									
AE lock failure		AE lock does not operate.	16	14	12(Yellow)								41	Looseness of self-timer P.C board screw
		AE lock operates always.	16	⑭	⑫(Yellow)									
		AE lock operates only after shutter release···Shutter release is impossible with AE lock SW. locked.	16										(41-42)	

2

Symptom	Cause	Page	SW	Lead Wire	VR	SL	R	C	Q	J (Jump lead)	IC-1	IC-2	OTHERS
Flash firing failure (Check in A mode using AEF 200X)	LED indication is normal with flash fully charged. But flash does not fire properly. (1) Flash does not fire. Shutter stays open.	15	SX2	27(Purple), 28(Purple)							20, 22, (20-21) (21-22)		F_1 terminal
	LED indication failure with flash fully charged. (1) "1/60" does not blink. Metered shutter speed LEDs light on. Shutter does not operate as Auto X.	15		30(White) ㊿							1, 41	25	F_2 terminal
	(2) "1/60" does not blink; remains ON. Flash fires with shutter operated as Auto X.	15									43	27	
	(3) "1/60" does not blink. Metered shutter speed LEDs blink. Firing without shutter operated as Auto X.	15									44	26	
	(4) LEDs of metered shutter speed and 1/60 blink, and flash does not fire.	15		25(Black), 26(Black)									Ground is not connected at hot shoe
	(5) "1/60" does not blink. Metered shutter speed LEDs light on. Shutter does not operate as Auto X. ···Monitor lamp of flash unit will not light up.	15	(SX2)	27(Purple), 28(Purple)									
	(6) LEDs do not light up at all. Shutter operates as Auto X, and flash fires.	15									(43-44)		
	(7) When pressing AE lock button after 1/60 blinks, metered shutter speed LED blinks. Shutter operates at metered shutter speed, and flash fires.	15										31	
Others	Winding is impossible by motor drive.	16										48	W_3 terminal
	No LEDs light with metering SW. (S_0 or S_1) ON of Motor Drive.	16										47	W_1 terminal
	Shutter is not released by Motor Drive.	17											W_2 terminal

■ Trouble related to electro unit

- ※1～※10 show the check point on the diagram left.
- A-6 or the like on the right shows the position (coordinate) on the schematic wiring diagram (P. 21).

A Shutter release failure

1 No LEDs light, shutter is not released···Release impossible even with Main SW. (S_6) ON→OFF→ON operation.

Voltage check of printed wiring with Main SW. (S_6) ON: approx. 3V ※1

NO →
- Main SW. (S_6) contact failure
- Joint part ⓐ; soldering failure
- ℓ_{22} (Red) soldering failure or disconnetion ····· D-3

YES ↓

Voltage check J_2 soldering area: approx. 3V ※2

NO →
- J_2 soldering failure ····· E-5
- Joint part ⓒ; soldering failure

YES →
- XL soldering failure ····· E-7
- Q_1 soldering failure or element failure ····· F-6
- IC_1 ㊲ soldering failure
- IC_2 ㉑, ㉙ soldering failure
- IC_1 ㊵-㊶ shortcircuit
- IC_2 ⑪-⑫, ㊸-㊹ shortcircuit
- IC_2 ㊹-㊺ shortcircuit

2 LEDs remain light, and shutter is not released with release SW. (S_2) ON.·····
(Release impossible even with Main SW. (S_6) ON→OFF→ON operation.

Is shutter released with remote control SW. (S_{13}) ON?

NO →
- Reset SW. (S_4) shortcircuit
- ℓ_{21} (Yellow) and GND shortcircuit (catching) ····· E-1
- J_4, J_5 soldering failure ····· C-7
- R_{12} soldering failure or element failure ····· C-7
- Q_4 soldering failure or element failure ····· C-7
- IC_2 ㊸ soldering failure

YES →
- S_2 contact failure
- ℓ_{36} (Grey) soldering failure or disconnection ····· I-5

3 With release SW. (S_2) ON, LEDs go out, but shutter is not released·····
(Release impossible, and LEDs light with Main SW. (S_6) ON→OFF→ON operation.

Is shutter released by short-circuiting C_7 and GND with twizzers? ※3

NO →
- SL_1 (R-Mg) failure (Absorptive surface dirty)
- SL_1 lead wires (Green, White) disconnection ····· A-2
- C_7 soldering failure or element failure ····· B-2
- R_7 soldering failure or element failure ····· C-2
- SL_1 lead wire (White) and GND shortcircuit ····· A-2

YES →
- ℓ_{32} (Green) disconnection ····· F-7
- Q_2 soldering failure or element failure ····· B-2
- IC_1 ⑩, ⑪ soldering failure
- IC_2 ⑮ soldering failure

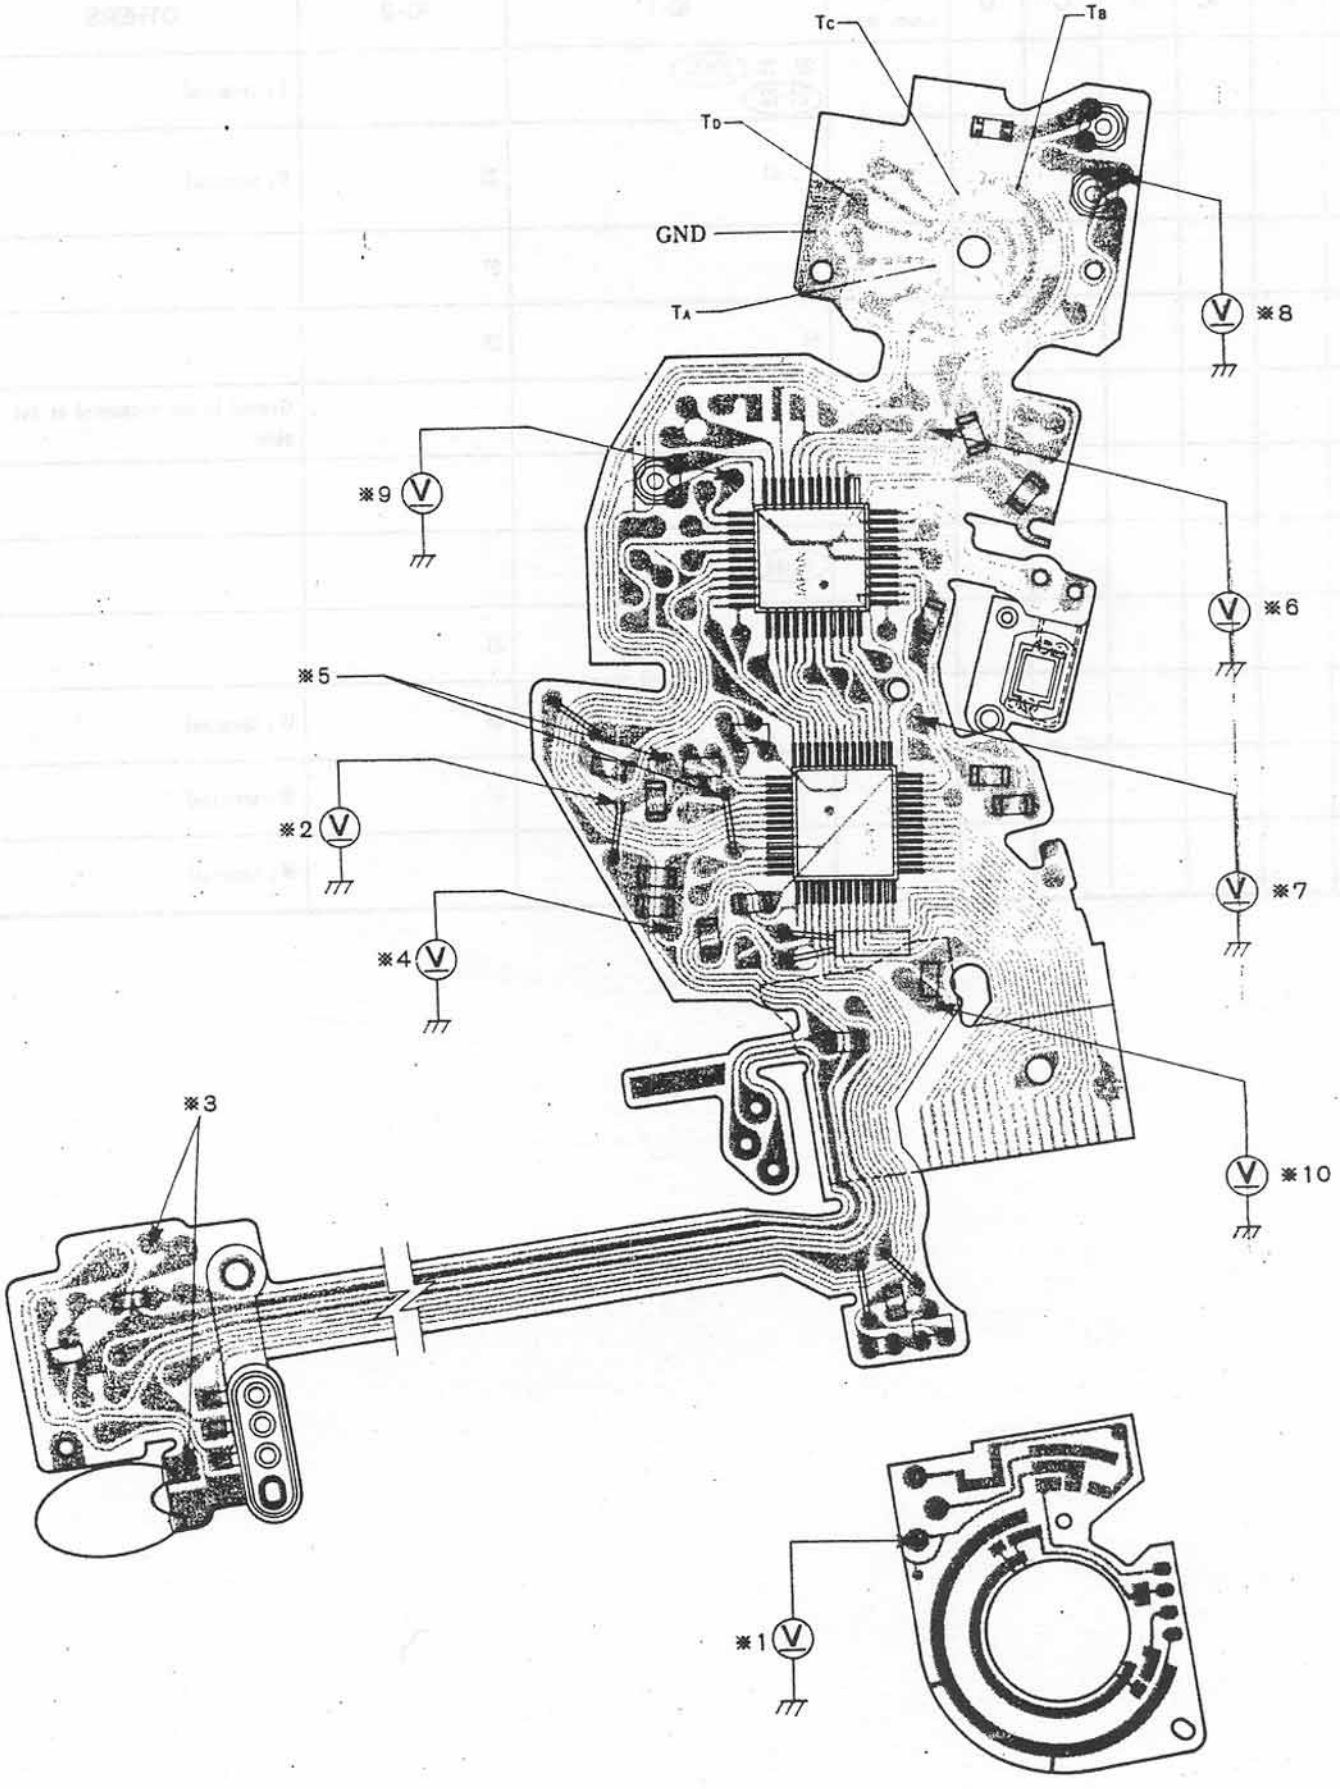
Tc
TB
TD
GND
TA
※8
※9
※6
※5
※2
※7
※4
※3
※10
※1

[4] Shutter is not released with remote control SW. (S_{13}) ON

·····(Release possible with operating button operation.)

- ℓ_{10} (Grey) soldering failure or disconnection ····· D-4
- ℓ_{29} (Black) soldering failure or disconneciton ····· D-4

[5] Shutter is not released even though self-timer LED lights with metering SW. (S_9 or S_1) ON

·····No finder LEDs light.

- J_1 soldering failure ····· F-5
- IC_1 ⑲ soldering failure

[6] Main SW. (S_8) ON makes shortcircuit, resulting in shutter release impossible and no lighting LEDs.

- The joint parts b) – c) shortcircuit
- ℓ_{12} (Red) and GND shortcircuit ····· K-5

[7] Main SW. (S_8) and metering SW. (S_9 or S_1) ON make shortcircuit, resulting in release impossible and no LEDs lighting.

- R_9 shortcircuit ····· E-5
- C_4 shortcircuit ····· E-5

[8] After shutter releasing with Main SW. (S_8) ON→OFF→ON, release impossible and no LEDs light.

Normal shutter speed when releasing →
- Reset SW. (S_4) contact: contact failure
- ℓ_{21} (Yellow) soldering failure or disconnection····· E-1
- IC_2 ㊷ soldering failure

Shutter curtains travel without slit when releasing. →
- IC_2 ㊺–㊻ shortcircuit

[9] Shutter is released when winding up.

- Release SW. (S_2) shortcircuit
- ℓ_{10} (Grey) and GND shortcircuit ····· D-4
- SL-1 (R-Mg): defective (attraction failure)
- ℓ_{28} (Grey) and GND shortcircuit ····· I-5
- Remote control terminal shortcircuit

[10] LEDs light and, shutter release is impossible with Main SW. (S_8) OFF.

- Joint parts a) – c) shortcircuit

[11] Shutter is released only once, after turning main switch ON (when slower shutter speed LED 1/30-1 sec glows).

- SL-2 (S-Mg) shortcircuit
- C_6 shortcircuit ····· E-5

B Finder indication failure

[1] No LEDs light with metering SW. (S_0 or S_1) ON
·····(Shutter operates normally.)

Voltage check on ℓ_{35} (Brown) soldering area : approx. 1V—0V ※4

NO →
- Metering SW. (S_0 or S_1) contact failure
- ℓ_{35} (Brown) soldering failure or disconnection ····· 1-6
- R_9; soldering failure or element failure ····· E-5
- IC_2㊲ soldering failure

YES →
- Joint part ①; soldering failure
- IC_2㊾ soldering failure

[2] No LEDs light with metering SW. (S_0 or S_1) ON
·····Shutter stays open with self-timer LED ON when released.

→ • IC_2⑭ soldering failure

[3] Only "M" does not light.

→
- Joint part ②. soldering failure
- IC_2㊿ soldering failure
- IC_2㊾—㊿ shortcircuit

[4] Part of LEDs does not light.

Check soldering failure of IC_2. flexible P.C board···joint part referring to the table below.

Finder LED	M	A	△	1000	500	250	125	60	30	15	8	4	2	1	▽	B
IC_2 pin No.	㊿	㊶	㊷	㊸	㊹	㊺	㊻	①	②	③	④	⑤	⑥	⑦	⑧	⑨
Joint part No.	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

[5] Self-timer LED lights with Main SW. (S_8) ON.

→
- ℓ_{16} (Grey) and GND shortcircuit ····· 1-4
- IC_1⑫—⑬ shortcircuit

[6] LEDs light with Main SW. (S_8) ON.

→
- Metering SW. (S_0 or S_1) and GND shortcircuit
- AE lock SW. (S_{14}) and GND shortcircuit
- ℓ_{12} (Yellow) and GND shortcircuit ····· 1-3
- ℓ_{35} (Brown) and GND shortcircuit ····· 1-6

[7] LEDs light by Main SW. (S_8) ON with shutter speed dial set at 30~1000 or A.

→ • IC_2㊱—㊲ shortcircuit

[8] When voltage is under specified B.C voltage, shutter release lock does not operate with LEDs ON·····No mode LED blinks.

- IC_1 ③ soldering failure
- IC_2 ㉓ soldering failure

[9] When decreasing voltage, mode LED remains ON; does not blink
·····No LEDs light when release locked.

- IC_1 ② soldering failure
- IC_2 ㉔ soldering failure

C Shutter failure

C-1 Shutter curtains travel in high speed, or without slit

[1] LED indication is normal. Shutter curtains travel without slit in M and A modes.

Does shutter fully open when releasing with ℓ_{14} (white) and J_3 short-circuited? ※5

NO →
- ℓ_{13} (Red) soldering failure or disconnection ····· K-5
- ℓ_{14} (White) soldering failure or disconnection ····· I-4
- SL_2 (S-Mg) absorptive surface dirty
- SL_2 (S-Mg) absorptive surface failure.
- The 2 nd curtain stop lever spring is off

YES →
- J_3 soldering failure ····· E-6
- Q_3 soldering failure or element failure ····· F-6
- IC_2 ㉚ soldering failure
- IC_2 ㉚–㉛ shortcircuit

[2] In A mode shutter operates in high speed with △ blinking.

(1) LED indication remains the same when changing AV, film speed and luminance.

Voltage check on soldering area of ℓ_7 (Green) : 0.9~1.1V ※6

NO →
- SV contact: contact failure
- ℓ_7 (Green) soldering failure or disconnection ····· C-9
- ℓ_7 (Green) and GND shortcircuit ····· C-9
- VR_4 soldering failure or element failure ····· G-5
- IC_1 ⑰, ㉙, ㉝: soldering failure

YES →

NO →
- IC_1 ⑥, ⑧, soldering failure
- IC_2 ⑰, ⑲ soldering failure

Is 288 mV adjustment possible corresponding to A/D conversion standard voltage adjustment?

NO →
- R_3 soldering failure or element failure ····· I-7
- VR_5 soldering failure or element failure ····· J-8
- IC_1 ㉗, ㉘ soldering failure

YES →
- C_3 soldering failure ····· F-7
- C_4 soldering failure ····· G-7
- IC_1 ⑨ soldering failure
- IC_1 short-circuited between pins ④–⑤, ⑤–⑥, ⑥–⑦, ⑦–⑧, ⑬–⑭, ⑭–⑮, ⑮–⑯, ㉓–㉔, ㉖–㉗, ㉜–㉝

(2)LED indication remains the same only when changing AV

·····Check by rotating aperture ring.

→ • ℓ_3 (Orange) soldering failure or disconnection ····· F-4

• MC brush deformed (Printed wiring short-circuited)

(3)LED indication remains the same only when film speed changing

·····Check by rotating film speed ring.

→ • ℓ_6 (Brown) soldering failure or disconnection ····· C-8

(4)LED indication does not change in accordance with luminance

·····Check by changing luminance.

→ • SPC$_1$ A and K shortcircuit ····· F-8

• IC$_1$ ㉑–㉒ shortcircuit

3 LEDs are normal. In M and A modes shutter curtains travel without slit when set to high speed. ·····Normal at slow speed

→ • Trigger SW. (S_3) contact failure

• ℓ_{15} (Orange) soldering failure or disconnection ····· K-6

• ℓ_{15} (Orange) connected to the next printed wiring (IC$_2$⑬) by mistake ····· K-6

4 In A and M modes, shutter speed remains 1/60 with LEDs "M" and "1/60" lighting.

→ • Looseness of earth plate (2023-4002) screw on TV P.C board.

• GND contact at TV SW.; contact failure

5 LED indication is normal. Occasional high shutter speed under darkness.

→ • IC$_1$ ⑦ soldering failure

• IC$_2$ ⑱ soldering failure

C-2 Shutter remains open

1 LED indication is normal. Shutter stays open in M and A modes

·····Slow shutter speed limit, 4 sec., does not operate.

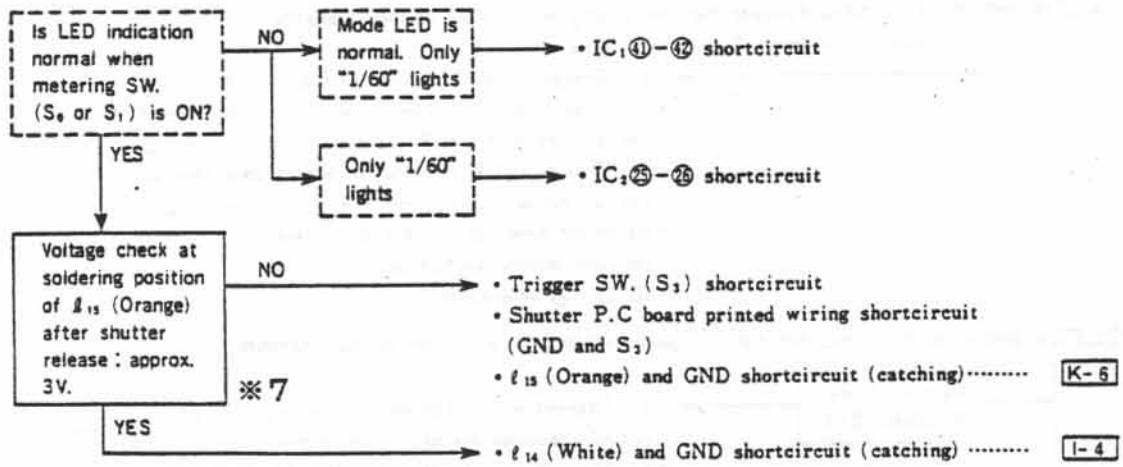
Is LED indication normal when metering SW. (S_0 or S_1) is ON?
NO
Mode LED is normal. Only "1/60" lights
• IC_1 ㊶–㊷ shortcircuit
YES
Only "1/60" lights
• IC_2 ㉕–㉖ shortcircuit
Voltage check at soldering position of ℓ_{13} (Orange) after shutter release : approx. 3V.
※7
NO
• Trigger SW. (S_3) shortcircuit
• Shutter P.C board printed wiring shortcircuit (GND and S_3)
• ℓ_{13} (Orange) and GND shortcircuit (catching)····· K-6
YES
• ℓ_{14} (White) and GND shortcircuit (catching) ····· I-4

2 In A mode, shutter stays open with ▽ blinking

(1) LED indication remains the same when AV, film speed, and luminance changing.

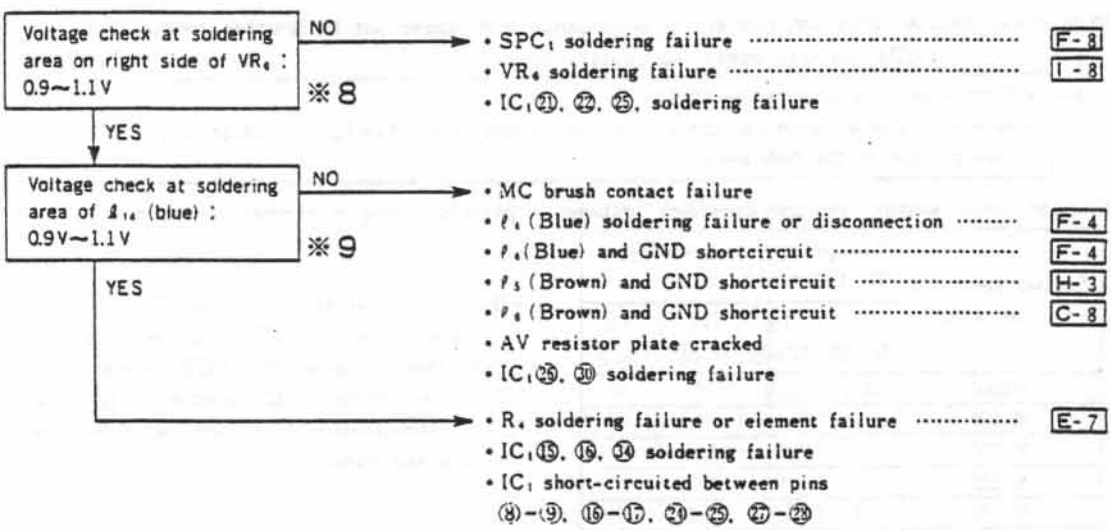
Voltage check at soldering area on right side of VR_4 : 0.9~1.1V
※8
NO
• SPC_1 soldering failure ····· F-8
• VR_4 soldering failure ····· I-8
• IC_1 ㉑, ㉒, ㉕, soldering failure
YES
Voltage check at soldering area of ℓ_{14} (blue) : 0.9V~1.1V
※9
NO
• MC brush contact failure
• ℓ_4 (Blue) soldering failure or disconnection ····· F-4
• ℓ_4 (Blue) and GND shortcircuit ····· F-4
• ℓ_3 (Brown) and GND shortcircuit ····· H-3
• ℓ_4 (Brown) and GND shortcircuit ····· C-8
• AV resistor plate cracked
• IC_1 ㉕, ㉚ soldering failure
YES
• R_4 soldering failure or element failure ····· E-7
• IC_1 ⑮, ⑯, ㉔ soldering failure
• IC_1 short-circuited between pins ⑧–⑨, ⑯–⑰, ㉔–㉕, ㉗–㉘

(2) LED indication remains the same only when changing AV

·····Check by rotating aperture ring.

• ℓ_3 (Brown) soldering failure or disconnection. ····· H-3

C-3 Others

1 In A mode, LED indication and shutter speed operate as slow shutter speed
·····Over exposure.

(1) LEDs and shutter speed remain the same only when film speed changing
·····Check by turning film-speed ring.

- ℓ_8 (Orange) soldering failure or disconnection
- ℓ_3 (Orange) and ℓ_4 (Blue); soldering area shortcircuit (on AV resistor plate)····· F-4, G-4
- ℓ_6 (Brown) and ℓ_7 (Green); soldering area shortcircuit (on SV resistor plate)····· C-8, B-9
- Deformed brush on SV resistor plate (printed wiring shorcircuit)
- IC_1 ㉙–㉚ shortcircuit

(2) LEDs and shutter speed remain the same when AV and film speed changing.

Over exposure by approx. 3 EV.

- ℓ_2 (Orange) and ℓ_5 (Brown); soldering area shortcircuit (on AV resistor plate) ····· F-4, H-3
- ℓ_6 (Brown) and ℓ_8 (Orange); soldering area shortcircuit (on SV resistor plate) ····· C-8, B-9

Over exposure by approx. 1 EV.

- IC_1 ㉜ soldering failure

2 In M mode, shutter does not operate in accordance with speed set by shutter speed dial
·····LEDs indicate operating shutter speed.

- Check if brush is deformed on TV SW.
- By turning shutter speed dial, check voltage of printed wiring (T_A~T_D) or voltage IC_2 ㉝–㊱. Then compare to the table below.

Shutter speed setting and corresponding voltage on printed wiring in normal condition.

Shutter speed and LED indication	Voltage of printed wiring on TV P.C board			
	T_A IC_2㉟	T_B IC_2㉞	T_C IC_2㉝	T_D IC_2㊱
M1000	3.0	3.0	0	0
M 500	3.0	0	0	0
M 250	3.0	0	3.0	0
M 125	0	0	3.0	0
M 60	0	3.0	3.0	0
M 30	0	3.0	0	0
M 15	0	3.0	0	3.0
M 8	3.0	3.0	0	3.0
M 4	3.0	0	0	3.0
M 2	0	0	0	3.0
M 1	0	0	3.0	3.0
B	0	3.0	3.0	3.0
A	3.0	3.0	3.0	0

- By brush contact failure on TV SW, the voltage becomes 3.0 V resulting in different shutter speed and LED indication.
- Replace flexible P.C board set with new one, when shutter is failure with voltage within the range.

3 Excessive deflection of LED indication and shutter speed from AV and film speed setting.

- ℓ_3 (Orange) and GND shortcircuit ····· F-4
- ℓ_8 (Orange) and GND shortcircuit ····· B-9

D Self-timer failure

1 Shutter release without delay

·····No self-timer LED blinks.

- Self-timer SW. (S_{10}) contact failure
- ℓ_{11} (Blue) soldering failure or disconnection ····· H-4
- Looseness of self-timer plate screw
- IC_2㊵ soldering failure

2 Shutter release without delay

·····Self-timer LED blinks after shutter release.

- $IC_1$⑨–⑩ shortcircuit
- IC_2⑮–⑯ shortcircuit

3 Shutter release with delay for 10-sec

·····No self-timer LED blinks.

Voltage check at soldering area of ℓ_{17} (Green) : approx. 3.0V ※10

NO →
- R_4 soldering failure or element failure ····· D-7
- Shortcircuit between self-timer LED (anode) and GND

YES →
- ℓ_{16} (Grey) soldering failure or disconnection ····· I-4
- ℓ_{17} (Green) soldering failure or disconnection ····· K-6
- LD_{17} (self-timer LED) failure
- $IC_1$⑨, ⑫ soldering failure
- IC_2⑯ soldering failure

4 Shutter release impossible with self-timer

·····Self-timer LED does not blink.

- IC_1⑬ soldering failure

5 Shutter operates in high speed with self-timer in A mode.

- $IC_1$⑧–⑨ shortcircuit
- IC_2⑯–⑰ shortcircuit

6 Shutter release with delay for 10-sec., locking AE.

- Self-timer plate printed wiring shortcircuit
- IC_2㊵–㊶ shortcircuit

7 Self-timer operates always.

- Self-timer SW. (S_{10}) deformation.
  (Shortcircuit between GND and printed wiring)
- ℓ_{11} (Blue) and GND shortcircuit (catching) ····· H-4

E AE lock failure

1 AE lock does not operate.

→ • AE lock SW. (S_{14}) contact failure
• ℓ_{12} (Blue) soldering failure or disconnection ····· 1-3
• Looseness of self-timer plate screw
• $IC_2$④①; soldering failure

2 AE lock operates always.

→ • AE lock SW. (S_{14}) deformation
(Shortcircuit between GND and printed wiring)
• ℓ_{12} (Yellow) and GND shortcircuit (catching) ····· 1-3

3 AE lock operates only after shutter release

·····Shutter release is impossible with AE lock SW. locked.

→ • $IC_2$④①–④② shortcircuit

F Flash firing failure. (Check in A mode using AEF 200X)

[1] LED indication is normal with flash fully charged. But flash does not fire properly.

(1) Flash does not fire. Shutter stays open.

- X contact (SX_2); contact failure
- F_1 terminal contact failure
- ℓ_{27} (Purple) soldering failure or disconnection ····· D-4
- ℓ_{28} (Purple) soldering failure or disconnection ····· H-4

[2] LED indication failure with flash fully charged.

(1) "1/60" does not blink. Metered shutter speed LEDs light on. Shutter does not operate as Auto X.

- F_2 terminal contact failure
- ℓ_{30} (White) soldering failure or disconnection ····· F-4
- ℓ_{30} (White) and GND shortcircuit (catching) ····· F-4
- $IC_1$①, ㊶ soldering failure
- IC_2㉕ soldering failure

(2) "1/60" does not blink; remains ON. Flash fires with shutter operated as Auto X.

- IC_1㊸ soldering failure
- IC_2㉗ soldering failure

(3) "1/60" does not blink. Metered shutter speed LEDs blink. Firing without shutter operated as Auto X.

- IC_1㊹ soldering failure
- IC_2㉖ soldering failure

(4) LEDs of metered shutter speed and 1/60 blink, and flash does not fire.

- Ground is not connected at hot shoe
- ℓ_{25} (Black) soldering failure or disconnection ····· K-5
- ℓ_{28} (Black) soldering failure or disconnection ····· H-4

(5) "1/60" does not blink. Metered shutter speed LEDs light on. Shutter does not operate as Auto X. ·····Monitor lamp of flash unit will not light up.)

- X contact (Sx_2) shortcircuit
- ℓ_{27} (Pink) and GND shortcircuit (catching) ····· D-4
- ℓ_{28} (Pink) and GND shortcircuit (catching) ····· H-4

(6) LEDs do not light up at all. Shutter operates as Auto X, and flash fires.

- IC_1㊺–㊹ shortcircuit

(7) When pressing AE lock button after 1/60 blinks, metered shutter speed LED blinks. Shutter operates at metered shutter speed, and flash fires.

- IC_2㉛ soldering failure

G Failure with Motor Drive using

1 Winding is impossible by motor drive.

→
- W_3 contact failure
- W_3 riveting failure or soldeirng failure
- IC_2㊽ soldering failure

2 No LEDs light with metering SW. ON of Motor Drive.

→
- W_1 contact failure
- W_1 riveting failure or soldering failure
- IC_2㊺ soldering failure

3 Shutter is not released by Motor Drive.

→
- W_2 contact failure
- W_2 riveting failure or soldering failure

■ Trouble related mechanism

(Winding and shutter releasing are impossible).

A. Returning winding lever to original position after winding completion, shutter curtains return to position of shutter released.

- Under-charge→Adjust the shutter charge following 2024 Service Manual Repair Guide P. 16.
- Looseness of winding shaft riveting (0338)→Replace winding shaft.

B. Charge operation plate set does not return at winding completed.

- Winding operation lever does not work properly. ..... Clean the winding operation lever and the holder. Adjust the spring (3416) shape or replace it. ..... Fig. 1
- (Stiff / Disconnection of SP. / Deformation of SP.)

C. Others

- Charge lever bent. → Adjust or replace.
- Disconnection of charge lever from charge roller. → Adjust or replace the charge lever and charge roller.
- Disengagement of mirror holder rivet. → Replace the mirror holder. (Adjust and check the mirror angle)
- Foreign particle on the mirror holder.
- MP return lever set (0256) stopper failure.
- Looseness of MP return lever riveting shaft. ..... Fig. 2

■Fig. 1

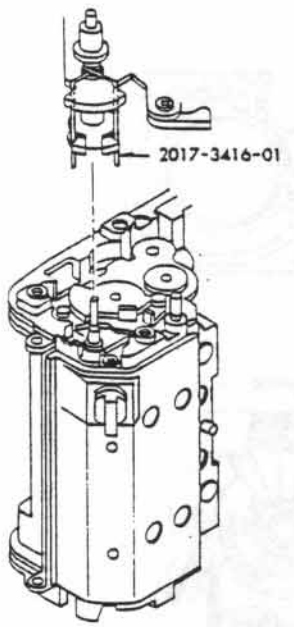

■Fig. 2

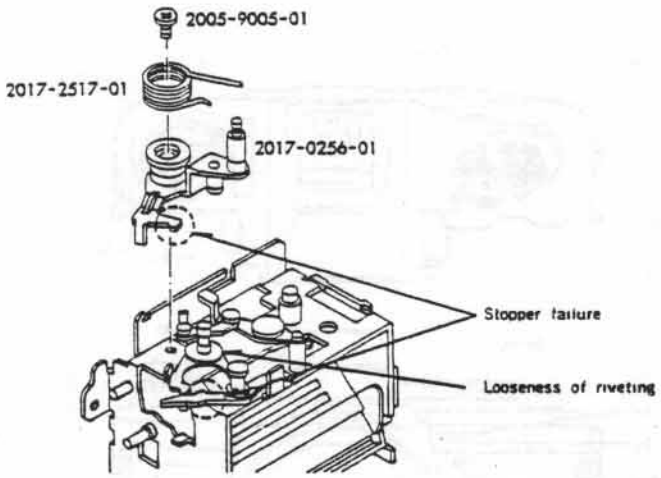

■ Operation of switches

Mark	Name	Function	Condition of operation
S_0	Touch switch	Setting metering and calculating circuit to ON, lighting finder LEDs.	ON by touching operating button.
S_1	Metering switch	The same as S_0.	ON by depressing operating button.
S_2	Release switch	Starting of circuits operating.	
S_3	Trigger switch	Counting start of exposure time with OFF.	OFF right after shutter operation start.
S_4	Reset switch	• Prevention against error during winding. • Reset of circuit. • Control of motor drive.	OFF with winding completed. ON with preset mech. returning after 2nd curtain travelled.
S_6	Main switch	• ON/OFF of circuit power source. • Power supplying.	Operating of main switch lever.
S_{10}	Self-timer switch	Setting circuit components to self-timer mode.	ON by pulling up self-timer lever.
S_{12}	Remote control switch	The same as S_2.	
S_{14}	AE lock switch	• Holding of exposure value and indication. • Slow synchronization using exclusive flash.	ON by pushing the self-timer lever down.
Sx_2	X contact	Firing of flash.	ON with 1st curtain travelled completely. OFF with 2nd curtain travelled completely.
T_A , T_D	TV switch	• Circuit changing of A, M, B, mode. • LED light changing of A, M, B mode.	By turning shutter speed dial.

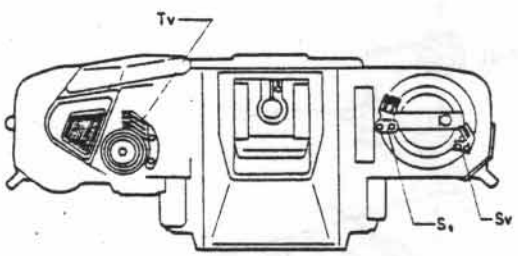

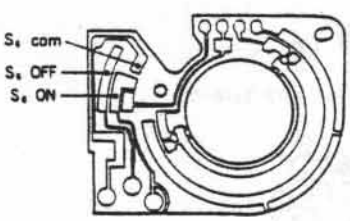

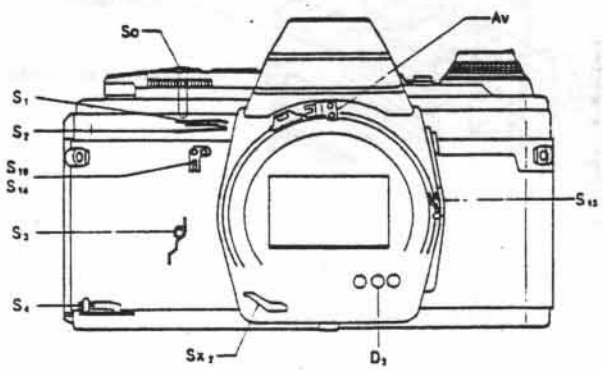



■ X-300 X-370 Circuit Diagram

: Circuit provided with shows the exclusive circuit for X-500/-570 ; X-300/-370 does not employ relevant circuit.

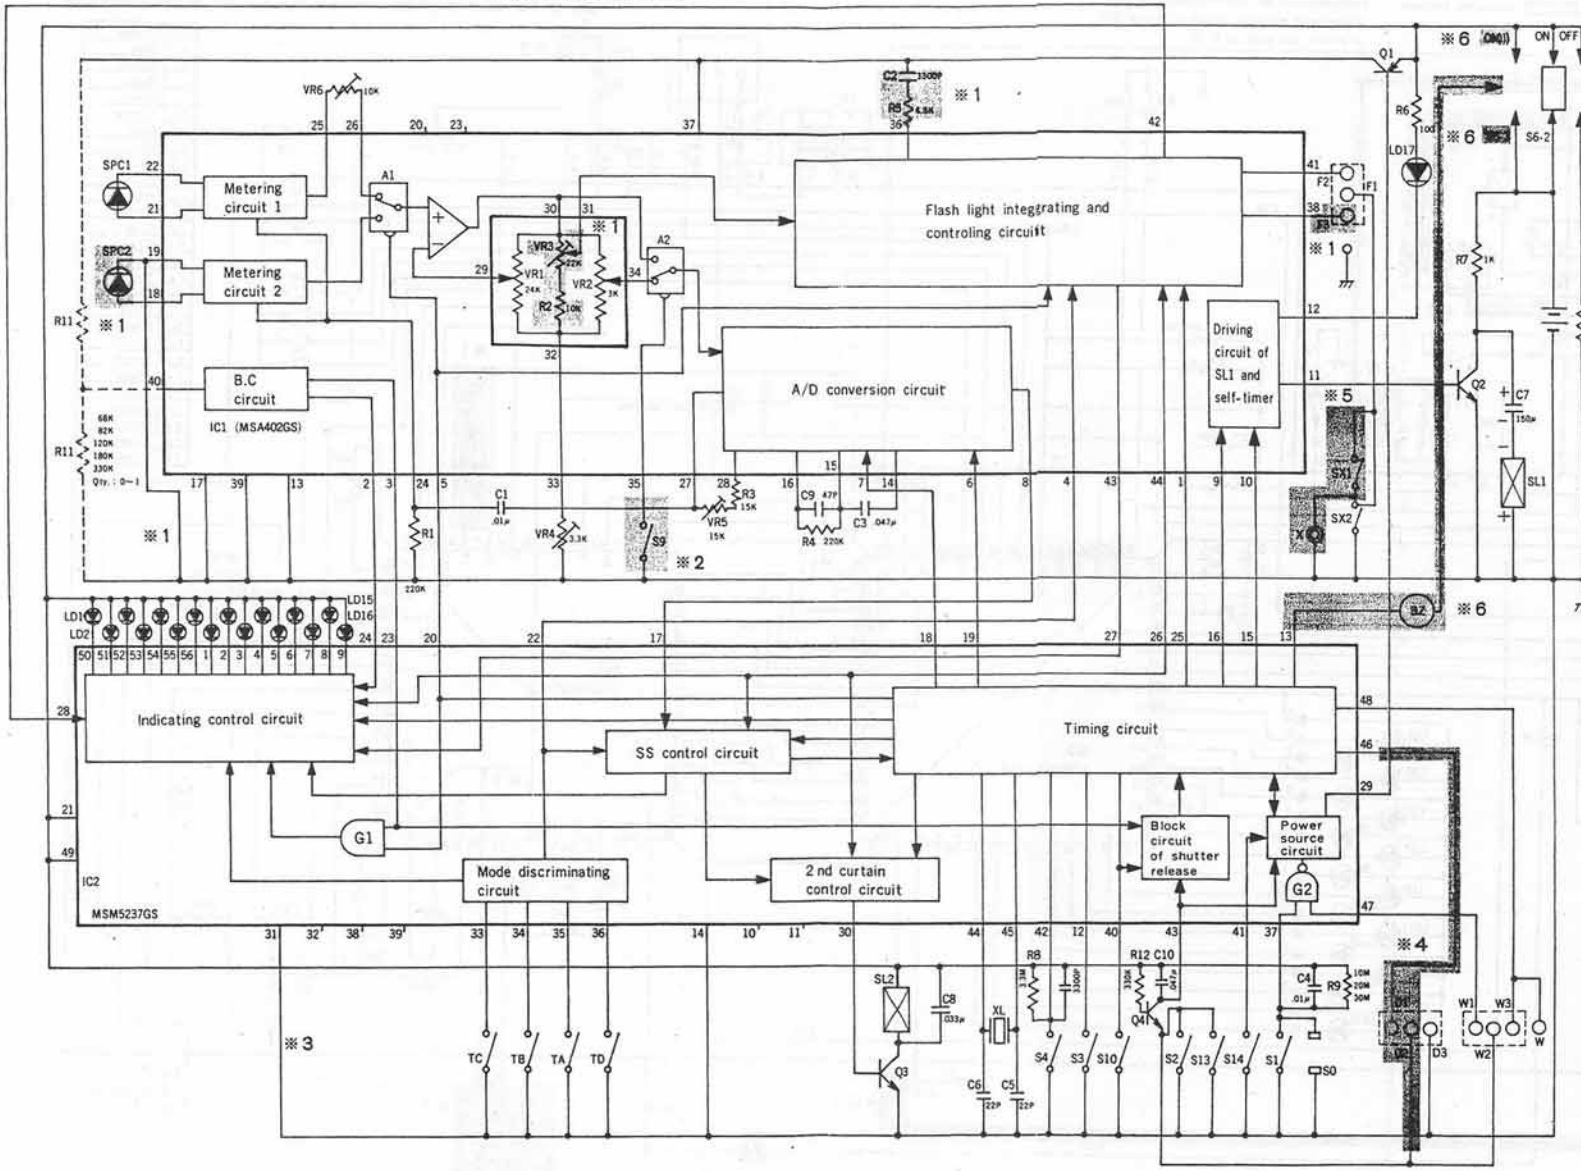

• Differences from X-500/-570 circuit

Discontinued specifications	Modification of circuit	Circuit diagram
Direct autoflash metering	• Discontinuity of electrical components: SPC2, VR3, R2, R5, C2, F3 terminal, ℓ31. • Disconnection of IC1 pins: IC1-⑰, ⑱, ⑲, ⑳, ㉑.	※1
Preview button	• Discontinuity of electrical components: S9, ℓ9. • Disconnection of IC1-㉑.	※2
Slow-shutter sync	• IC2-⑭ and GND are connected.	※3
Connection with Multi-Function Back	• Discontinuity of electrical components: D1, D2, ℓ18, ℓ20. • Disconnection of IC2-㊾	※4
Sync terminal	• Discontinuity of electrical components: SX1, Sync terminal, ℓ29.	※5
Audible piezoelectric warning	• Discontinuity of electrical components: ℓ31, BZ • Disconnection of IC2-⑪	※6

Symbol	Name	Symbol	Name	Symbol	Name
S_1	Touch SW	$S_{6\text{-}1}$	Main SW (ON)	S_{X1}	X contact
S_2	Metering SW	$S_{6\text{-}2}$	Main SW	T_A	TV SW
S_3	Release SW	S_{10}	Self-timer SW	T_B	
S_4	Trigger SW	S_{13}	Remocon SW	T_D	
S_5	Reset SW	S_{14}	AE lock SW		
$S_{6\text{-}1}$	Main SW OFF	S_9	Guard SW, against electro shock		
$S_{6\text{-}2}$	Main SW ON				

Name	Function	Name	Function	Name	Function	Name	Function	Name	Function	Name	Function	Name	Function	Name	Function	Name	Function
IC_1	Metering, calculation, A/D conversion, flash control, and others	SL_1	Shutter magnet	R_9	Touch SW adjustment	Q_4	Prevention against error using MD	C_4	Prevention against tooth SW noise	C_9	Prevension against counter-electromotive -force of SL_2	C_{10}	Prevension against release signal chattering			F_1	Firing of flash
IC_2	Timing control, SS control, indication control	VR_1	SV setting	R_{11}	B.C lock voltage adjustment	C_1	Power source response	C_5	X_1 oscillation	C_9	Prevension against IC_1 oscillation	C_{11}	Prevention against error using winder	W_1	MD$_1$ metering signal	F_3	Flash ready signal
SL_1	Release magnet	VR_2	AV setting	Q_1	Power source driving	C_2	Double integrating	C_6	X_2 oscillation			X_L	LC oscillator	W_2	MD$_1$ release signal		
		VR_3	Flash level adjust	Q_2	SL_1 driving			C_7	S.$_1$ driving			SPC_1	Natural light metering	W_3	MD$_1$ winding signal		
		VR_4	144mV adjustment	Q_3	SL_2 driving									D_1	Data Imprint Signal		
		VR_5	288mV adjustment											D_2	Release output Signal		
		VR_6	AE level adjustment											D_3	GND contact		

X-300 / X-370 Substantial Circuit Diagram

: Flaxible P.C board set
: Shield

□ : Contact
■ : Soldering position except lead wire's (a~c/1~17 show joint part)

: Circuit provided with shows the exclusive circuit for X-500/-570 ; X-300/-370 does not employ relevant circuit.

Explanations of this circuit discontinuity and employing of exclusive circuit for X-300/-370 (※1~※6) are given on P. 19.

- The figures in the frame of IC1 and IC2 show voltage (V) of each pin. Voltage in the parenthesis of IC1-⑬, ⑭, ⑪, ⑩, IC2-⑪ is for X-500/-570.
Other IC pin voltages than above are common to X-500/-570.
Mesuring conditions : Voltage supply (3V), winding completed, A mode, around ASA 100, finder LED next to 1/500 lights up. (Pin voltages vary slightly according to types of camera and measuring instrume

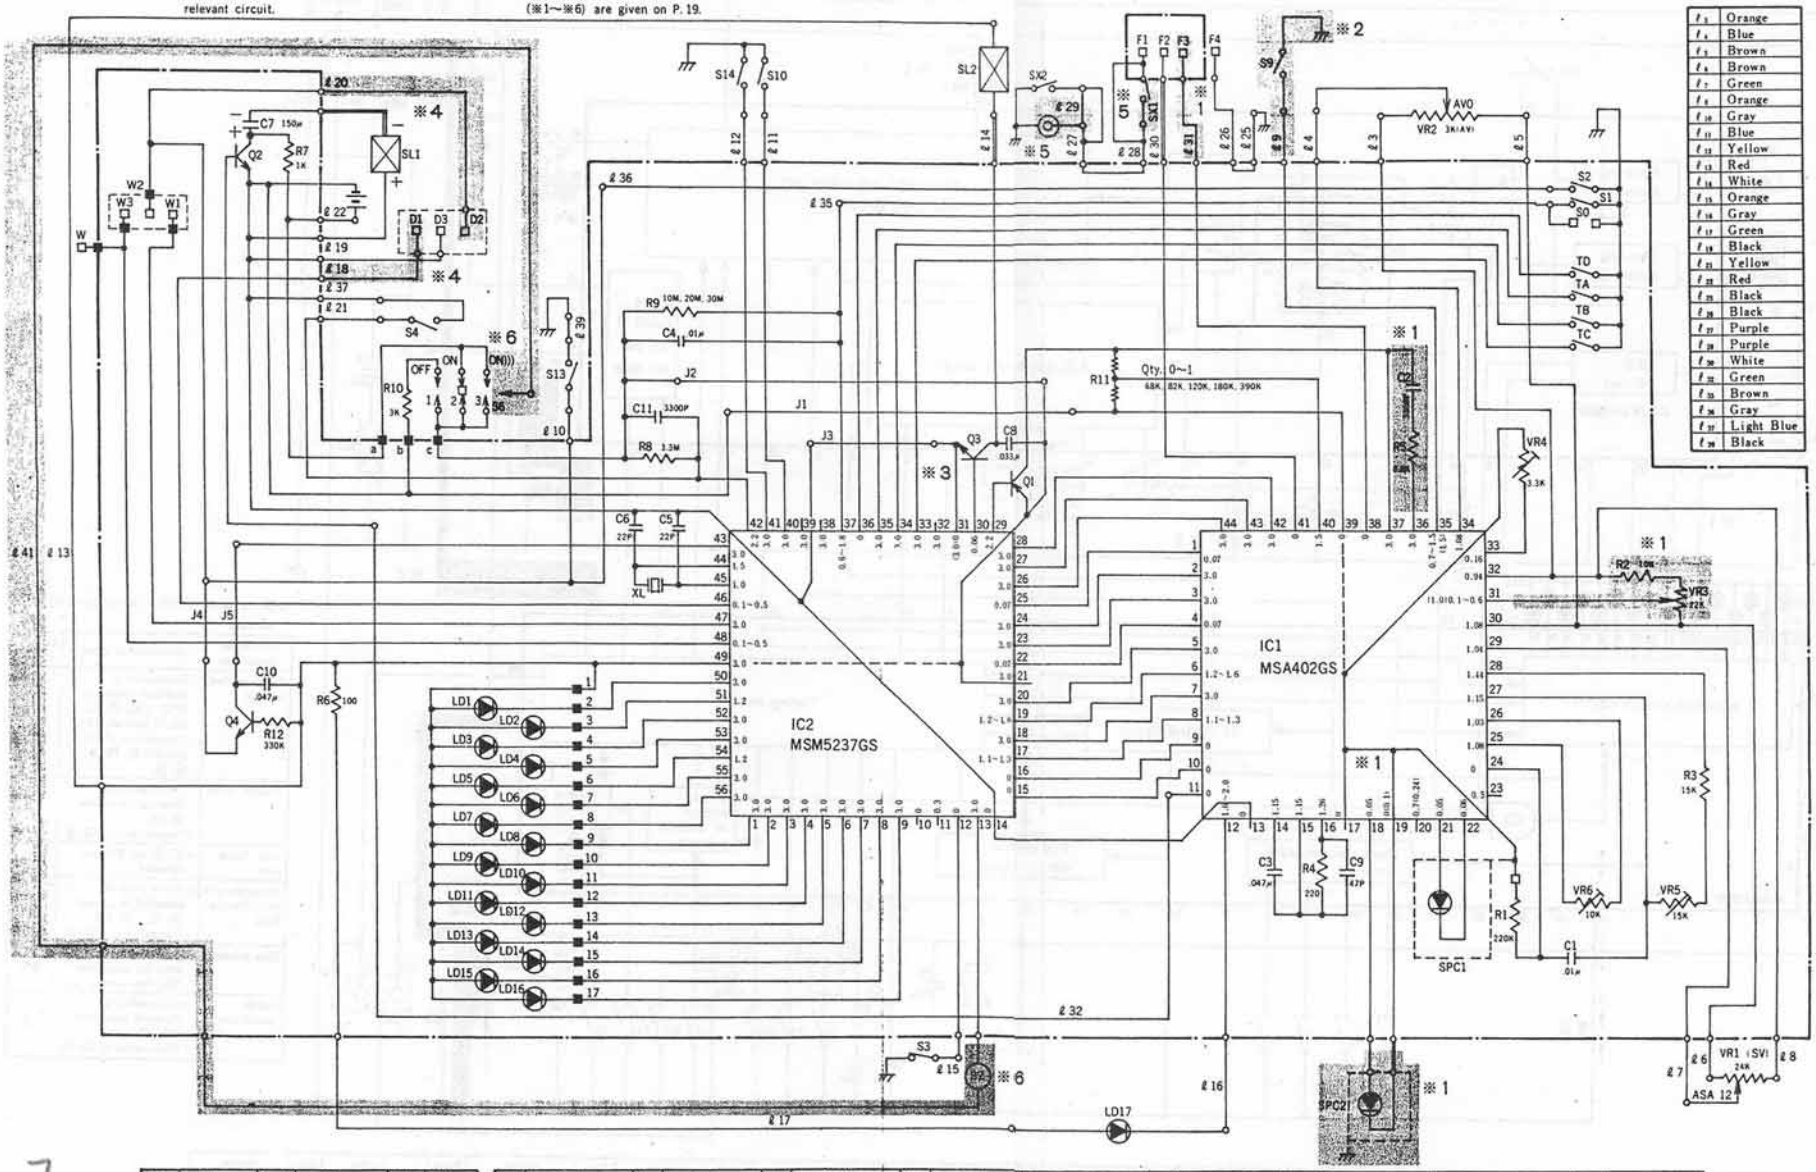

ℓ1	Orange
ℓ2	Blue
ℓ3	Brown
ℓ4	Brown
ℓ7	Green
ℓ8	Orange
ℓ10	Gray
ℓ11	Blue
ℓ12	Yellow
ℓ13	Red
ℓ14	White
ℓ15	Orange
ℓ16	Gray
ℓ17	Green
ℓ18	Black
ℓ21	Yellow
ℓ22	Red
ℓ25	Black
ℓ26	Black
ℓ27	Purple
ℓ28	Purple
ℓ30	White
ℓ31	Green
ℓ35	Brown
ℓ36	Gray
ℓ37	Light Blue
ℓ39	Black

Symbol	Name	Symbol	Name	Symbol	Name
S_8	Touch SW	S_{16}	Main SW ON))	S_{T1}	X contact
S_1	Metering SW	S_9	DV SW	T_A	
S_2	Release SW	S_{10}	Self-timer SW	/	TV SW
S_3	Trigger SW	S_{11}	Remocon SW	T_0	
S_4	Reset SW	S_{12}	AE lock SW		
S_{5-1}	Main SW OFF	S_{13}	Check SW for back metering shoot		
S_{5-2}	Main SW ON				

Name	Function	Name	Function	Name	Function	Name	Function
IC_1	Metering, calculation, A/D conversion, flash control, and others	SL_2	Shutter magnet	R_9	Touch SW adjustment	Q_4	Prevention against error using MD1
		VR_1	SV setting	R_{11}	B.C lock voltage adjustment	C_1	Power source response
IC_2	Timing control, SS control, indication control	VR_2	AV setting	Q_1	Power source driving	SPC_1	Correction
		VR_3	Flash level setting	Q_2	SL_1 driving	C_3	Double integrating
SL_1	Release magnet	VR_4	144mV adjustment	Q_3	SL_2 driving		
		VR_5	288mV adjustment				
		VR_6	AE level adjustment				

Name	Function	Name	Function	Name	Function	Name	Function	Name	Function
C_4	Prevension against touch SW noise	C_8	Prevension against counter-electromotive -force of SL_2	C_{10}	Prevention against release signal	SPC_2	Natural light metering	F_1	Firing of flash
C_5	XL oscillation	C_9	Prevension against IC_1 oscillation	C_{11}	Prevention against chattering	W_1	MD_1 metering signal	F_2	Flash ready signal
C_6	XL oscillation				Prevention against error using winder	W_2	MD_1 release signal	D-F	Flash Sensor
C_7	SL_1 driving			XL	LC oscillator	W_3	MD_1 winding signal	W	Winder contact
				SPC_1	Natural light metering	D_1	Back Sensor signal		
						D_2	Release signal		
						D_3	GND contact		

X-300 CODE No. 2025-100
X-370 CODE No. 2025-300

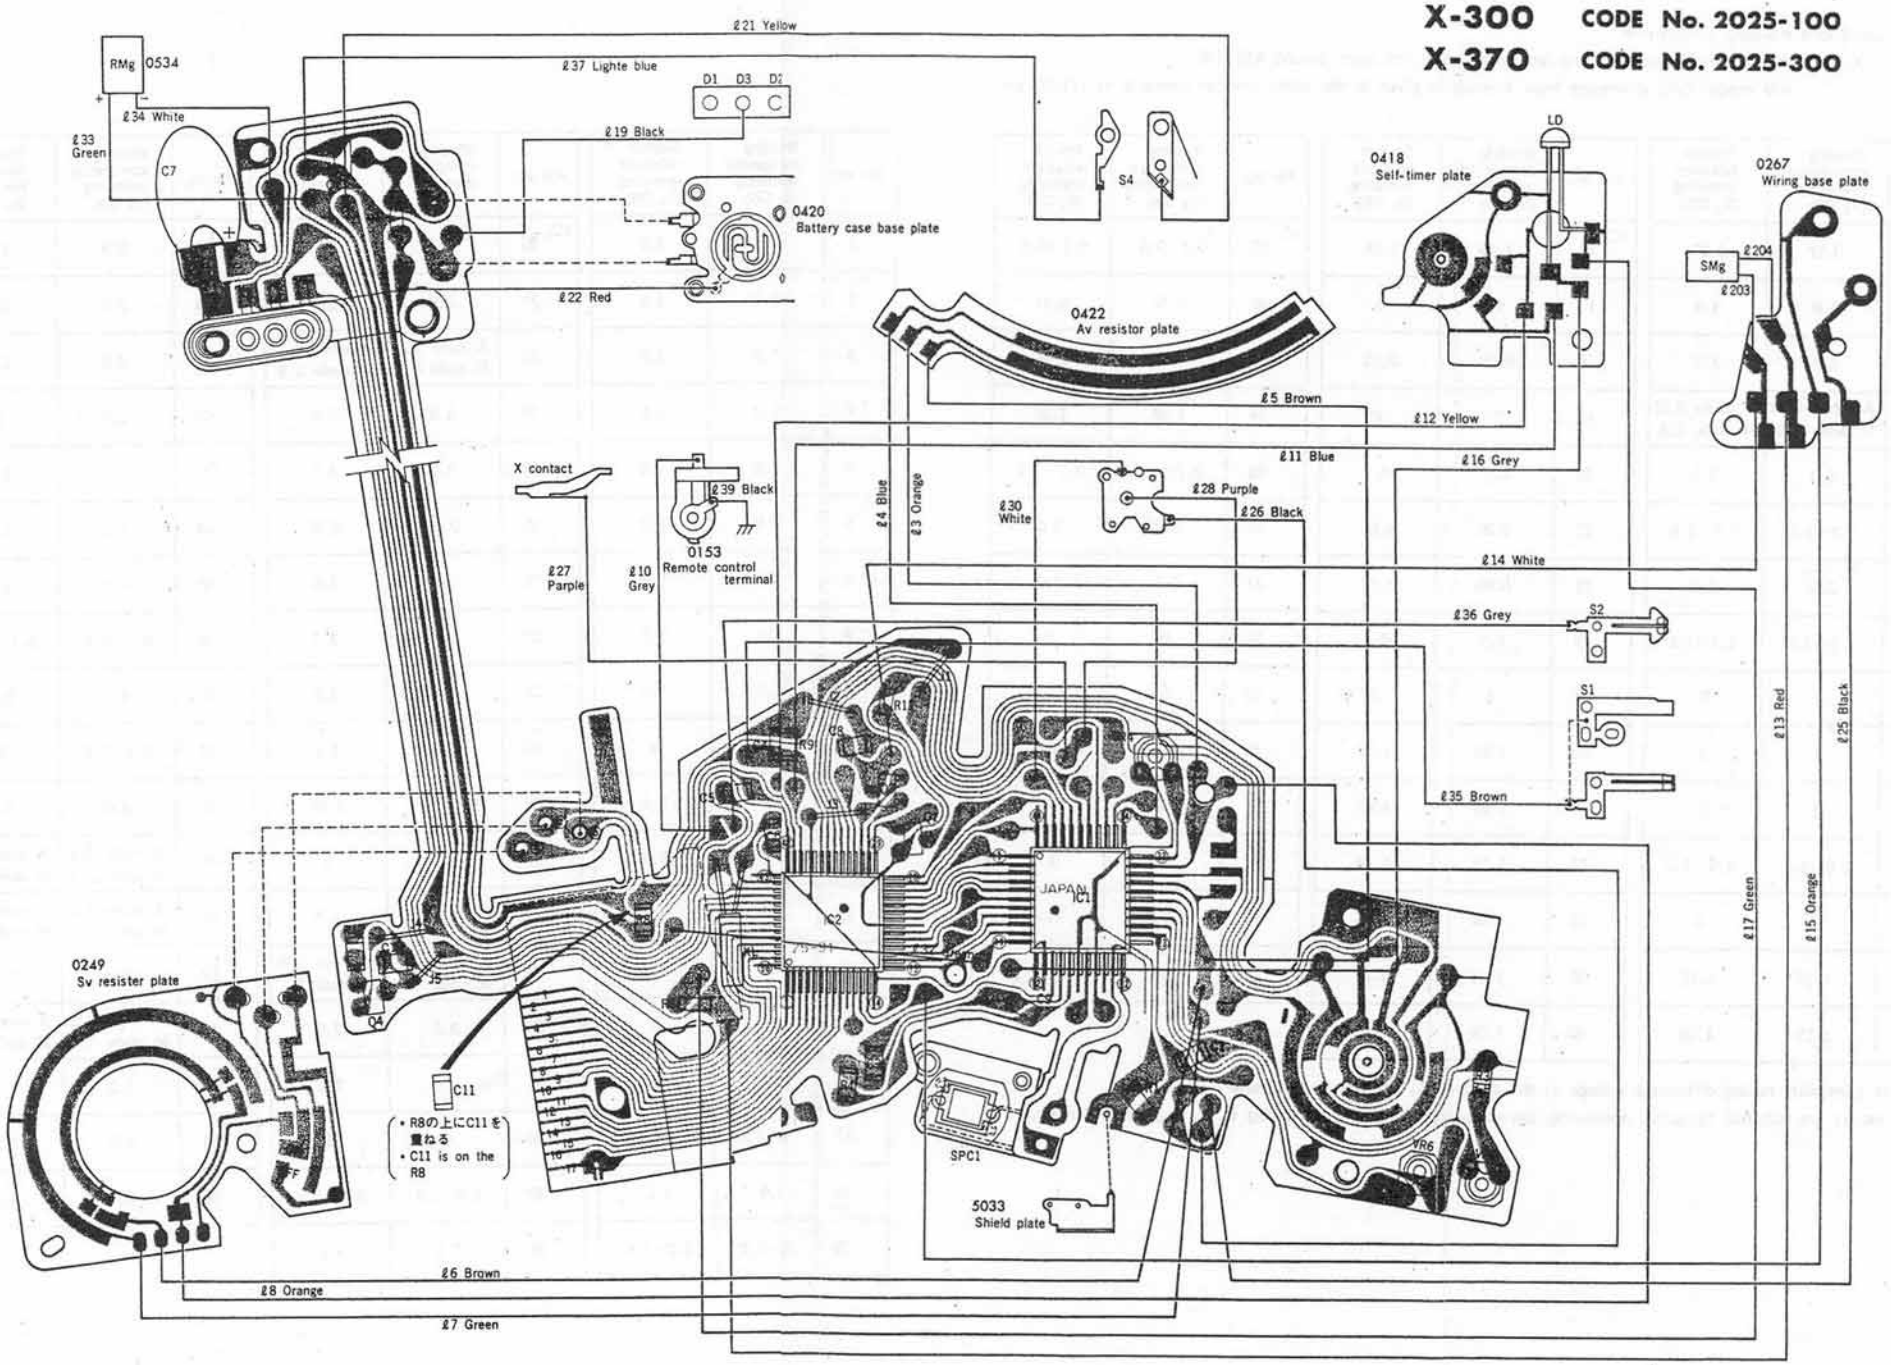

■ IC pin voltages

Measuring conditions: ● Supply voltage···3V
● A mode···Measure with no lens attached in the room around ASA 100.
● M mode···Only difference from A mode is given in the table. (shutter speed is at 1/1000 sec.)

Pin No.	Winding completed metering (S_0 ON)	Shutter released metering (S_0 ON)
IC_1 1	0.07	0.07
2	3.0	3.0
3	3.0	3.0
4	A mode 0.07 M mode 0.8	A mode 0.07 M mode 0.8
5	3.0	3.0
6	1.2~1.6	1.2~1.6
7	3.0	3.0
8	1.1~1.3	1.1~1.3
9	0	0
10	0	0
11	0	0
12	1.6~2.0	1.6~2.0
13	0	0
14	1.15	1.15
15	1.15	1.15

Pin No.	Winding completed metering (S_0 ON)	Shutter released metering (S_0 ON)
IC_1 16	1.26	1.26
17	0	0
18	0.05	0.05
19	0	0
20	0.7	0.7
21	0.05	0.05
22	0.06	0.06
23	0.5	0.5
24	0	0
25	1.08	1.08
26	1.03	1.03
27	1.15	1.15
28	1.44	1.44
29	1.04	1.04
30	1.08	1.08

Pin No.	Winding completed meterering (S_0 ON)	Shutter released metering (S_0 ON)
IC_1 31	0.1~0.6	0.1~0.6
32	0.94	0.94
33	0.16	0.16
34	1.08	1.08
35	0.7~1.5	0.7~1.5
36	3.0	3.0
37	3.0	3.0
38	0	0
39	0	0
40	1.5	1.5
41	0	0
42	3.0	3.0
43	3.0	3.0
44	3.0	3.0

● There is possibility having difference voltage at the state of S_0 ON and S_0 OFF(metering hold).
● Above values are obtained by actual measuring, pin voltages vary slightly according to the measured camera.

Pin No.	Winding completed metering (S_0 ON)	Shutter released metering (S_0 ON)
IC_2 1	3.0	3.0
2	3.0	3.0
3	3.0	3.0
4	3.0	3.0
5	3.0	3.0
6	3.0	3.0
7	3.0	3.0
8	3.0	3.0
9	3.0	3.0
10	0	0
11	3.0	3.0
12	0	3.0
13	3.0	3.0
14	0	0
15	0	0
16	0	0
17	1.1~1.3	1.1~1.3
18	3.0	3.0
19	1.2~1.6	1.2~1.6

Pin No.	Winding completed metering (S_0 ON)	Shutter released metering (S_0 ON)
IC_2 20	3.0	3.0
21	3.0	3.0
22	A mode 0.07 M mode 0.8	A mode 0.07 M mode 0.8
23	3.0	3.0
24	3.0	3.0
25	0.07	0.07
26	3.0	3.0
27	3.0	3.0
28	3.0	3.0
29	2.2	2.2
30	0.06	0.06
31	0	0
32	3.0	3.0
33	A mode 3.0 M mode 0	A mode 3.0 M mode 0
34	3.0	3.0
35	3.0	3.0
36	0	0
37	0.6~1.8	0.6~1.8
38	3.0	3.0

Pin No.	Winding completed metering (S_0 ON)	Shutter released metering (S_0 ON)
IC_2 39	3.0	3.0
40	3.0	3.0
41	3.0	3.0
42	2.2	0
43	3.0	3.0
44	1.5	1.5
45	1.0	1.0
46	0.1~0.5	0.1~0.5
47	3.0	3.0
48	0.1~0.5	0
49	3.0	3.0
50	A mode 3.0 M mode 1.2	A mode 3.0 M mode 1.2
51	A mode 1.2 M mode 3.0	A mode 1.2 M mode 3.0
52	3.0	3.0
53	A mode 3.0 M mode F	A mode 3.0 M mode F
54	1.2	1.2
55	3.0	3.0
56	3.0	3.0

Inspection Standard

1. This standard specifies uniform performance levels for servicing in order to guarantee our product's quality to customers. Each item is detailed so that you can follow this standard when you receive inquiries from users or are asked for checks.
2. When delivery or acceptance inspections are required, do not directly apply this standard to the performance measurements, but refer to the corresponding standard (manual).
3. Some users, because of their taste or special purposes, may require adjustment of this standard. In this case, perform the adjustment according to the user's request whenever possible.

Check Item	Checkpoint	Description
Main switch		Operation·····Squeak, roughness, click feeling.
		Beeper ·····In "ON))) " position, a beeper should sound when touch SW. is turned ON or when AE is locked at shutter speed is slower than "1/30" in A mode. ·····Beeping should be free of irregular sound.
Winding	Winding lever	Operation·····There shall be no uneven action, roughness, sticking or contact, etc.
		Play ·····Shall be less than 0.7 mm at the tip of the lever.
	Spool	Operation·····An even and smooth idle rotation shall enable the film to rewind securely.
		Spool torque···200 to 300 g (②, ③, ④ as shown in the figure below) 
	Sprocket	Operation·····Slip, no-load rotation with the rewind button depressed.
Rewinding	Rewind button	Operation·····Lock, unlock (To be reset at the first half of rewinding), touch or contact.
		Lock position···Should be above, the bottom cover. Unlock position···Should be below the bottom cover surface.
	Rewind handle	Operation·····There shall be no uneven heavy movement, touch or contact, etc. ·····Effective spring action.
Film counter	Counter dial	Feed ·····The counter dial shall be 1 when the rear lid is closed and the film is wound twice. There shall be no contact, skip, etc. Return ·····There shall be no contact, etc., and the counter dial shall return to S.
		Index deviation···Shall be within the range as illustrated below:

<table>
<tr><th>Check Item</th><th>Checkpoint</th><th>Description</th></tr>
<tr><td>SLS</td><td></td><td>Operation·····SLS signal should not come in sight from above in case of no film loaded.
·····SLS signal should come in sight from above as illustrated below in case of a film loaded.
Counter····· 1 Counter·····36+ 2

(In sight) (In sight)</td></tr>
<tr><td rowspan="5">Shutter</td><td>Operating button</td><td>• Operation·····There shall be no roughness, contact, shock, etc., and the shutter button shall return to the original position.
• Touch SW., metering SW., release SW., should operate properly.
• Shutter should not be released while winding up.
Should be adle to be released with release lever returned to its original position after winding up.</td></tr>
<tr><td rowspan="2">Speed dial</td><td>Operation·····There shall be no squeak, roughness, etc., and the dial shall rotate smoothly. Click feeling.
The dial should not rub top cover while rotating.</td></tr>
<tr><td>Index deviation···Speed and mode letters shall not be shaded by window.
Undesired speed letters shall not be visible at click stop position.</td></tr>
<tr><td>Shutter curtain</td><td>• There shall be no pin holes, surplus adhesives, etc.
• Edge metal shall not come in sight at the shutter wound and released.
• 2 nd curtain edge metal shall not be in sight more than 0.5 mm on the way of winding, viewed from the body rear.</td></tr>
<tr><td></td><td>Operation·····There shall be no contact between 1 st and 2 nd curtains, bounds inside the image frame, protrusion of the curtain, abnormal sound, etc.
The curtain should travel properly even if operating button is depressed fast, slowly, or strongly.</td></tr>
<tr><td colspan="3">Shutter speed
<table>
<tr><td>Dial position</td><td>1000</td><td>500</td><td>250</td><td>125</td><td>60</td><td>30</td><td>15</td><td>8</td><td>4</td><td>2</td><td>1</td><td>AUTO
X</td></tr>
<tr><td>Reference value (ms)</td><td>0.98</td><td>1.95</td><td>3.91</td><td>7.81</td><td>17.0</td><td>31.3</td><td>62.5</td><td>125</td><td>250</td><td>500</td><td>1000</td><td>20.0</td></tr>
<tr><td>Standard</td><td>±0.5 EV</td><td>±0.4 EV</td><td colspan="2">±0.3EV</td><td>+0.17
−0.42 EV</td><td colspan="6">±0.3EV</td><td>+0.2
−0.23 EV</td></tr>
<tr><td>Tolerance (ms)</td><td>0.69
/
1.38</td><td>1.48
/
2.58</td><td>3.17
/
4.81</td><td>6.35
/
9.62</td><td>12.7
/
19.2</td><td>25.4
/
38.5</td><td>50.6
/
76.9</td><td>101
/
154</td><td>203
/
307</td><td>405
/
615</td><td>812
/
1230</td><td>17
/
23</td></tr>
</table>
• Curtain speed···Shall be within 13 ms (travelling time for 32 mm) for both 1 st and 2 nd curtains.
• Fluctuation···The difference between the maximum and minimum values in the center of the image plane (B range) shall be within 0.4 EV. (Measure five times repeatedly.)
• Uneveness of exposure···The difference of the exposure time between both ends (A, C ranges) and the image plane center (B range) shall be within 0.3 EV, and the difference between A and C ranges shall be within 0.4 EV.</td></tr>
<tr><td>Synchro</td><td>X delay time
<table>
<tr><th>Shutter speed</th><th>Item</th><th>Tolerance</th></tr>
<tr><td rowspan="2">1/60</td><td>X contact delay time ·····A range</td><td>Over 0.4 ms</td></tr>
<tr><td>From X contact ON to 2 nd curtain start···B range</td><td>Over 2.4 ms</td></tr>
</table></td></tr>
</table>

<table>
<tr><th>Check Item</th><th>Checkpoint</th><th>Description</th></tr>
<tr><td>Self-timer</td><td>Lever</td><td>● Operation……There shall be no roughness, squeak, etc. Click feeling.
● Self-timer SW. should not be turned ON by snapback of AE lock releasing.</td></tr>
<tr><td></td><td>Timer function</td><td>● Setting the lever to "OFF" after starting shall stop operation.
● ON/OFF cycle of the lamp (LED) shall satisfy the following time chart:
 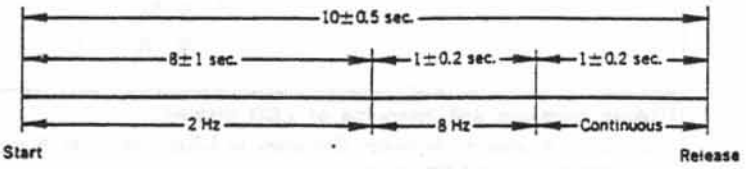
</td></tr>
<tr><td>Finder</td><td>View</td><td>Inclination of image, coincidence, fading on one side.</td></tr>
<tr><td></td><td>LED display</td><td>● All LEDs should be clear, be free of dust, shade.
● LED indication (ON/OFF) should be as follows corresponding to each mode of shutter speed dial.
<table>
<tr><th colspan="2">SS DIAL</th><th>A</th><th>1/1000~ 1</th><th>B</th></tr>
<tr><td rowspan="2">No electroflash</td><td>Mode indicator</td><td>"A" ON
("A" blinking when cells near exhaustion)</td><td>"M" ON
("M" blinking when cells near exhaustion)</td><td>"M" ON
("M" blinking when cells near exhaustion)</td></tr>
<tr><td>Metering indicator</td><td>Proper shutter speed indicator ON</td><td>Proper shutter speed indicator ON
Selected shutter speed indicator blinking</td><td>B indicator "✱" ON</td></tr>
<tr><td rowspan="2">With Auto Electroflash X-series</td><td>Mode indicator</td><td>No indicated
("A" blinking when cells near exhaustion)</td><td>No indicated
("M" blinking when cells near exhaustion)</td><td>No indicated</td></tr>
<tr><td>Metering indicator</td><td>"1/60" blinking
("1/60"-"▼" blinking with AE locked)</td><td>"1/60" blinking
(AE lock impossible)</td><td>B indicator "✱" blinking</td></tr>
</table>
Others……
● The indication should light up for 15 seconds after the metering switch (S_a or S_1) is OFF. The indication should remain ON for 15 seconds after shutter release.
● Immediately the self-timer operates and shutter is released, the indication should go off.
● 3 or more metered shutter speed LEDs should not light up.
● Over-range LED (▲) and under-range LED (▼) should go on and off independently. (Should not light up simultaneously with "1000" or "1" LED)
● In A mode, shutter speed should be within 1-1 sec. when under-range LED (▼) is ON. Should be slower than 1 sec. when (▼) is blinking.</td></tr>
</table>

Check Item	Checkpoint	Description
Auto exposure	ASA dial	Operation……There shall be no touch or contact, roughness, etc., and the dial shall rotate smoothly, and shall engage with the lock groove securely.
		Dial deviation…Should be within the range shown below including play.

[1] Auto exposure and tolerance of LED display

1. LED display at M mode…Conforms to LED display at A mode as shown in Table 1 below:
2. EE level and LED display at A mode.

Table-1 (Lens : Master lens for S-auto. ASA : 100)

Luminance	Diaphragm	Tolerance of LED lighting				Tolerance of EE level	Variation
EV 5	F 4	4	▯	■	■	0 ±0.8EV	0.4EV
		2	▯	▯	▯		
		1	■	■	▯		
EV 11	F 8	60	▯	■	■		
		30	▯	▯	▯		
		15	■	■	▯		
EV 14	F 5.6	1000	▯	■	■		
		500	▯	▯	▯		
		250	■	■	▯		

[2] High/Low speed limit

1. High-speed limit…The exposure time should be within 0.69—1.38 ms with over-range LED ON in A mode. (Check with the shutter tester in A mode.)
2. Low-speed limit……The exposure time should be within 4 seconds with under-range LED ON in A mode. (Check by interrupting light to the light receiver in A mode.)

[3] AE lock

- Depressing AE lock should activate the camera's meter and viewfinder LED disply.
- AE lock should not operate in M mode.
- Exposure change with continuous shooting (A mode)

Standard……Shutter speed variation should be within ±0.3 EV with AE locked.
(For shutter speed faster than 1/500, variation should be within ±0.5 EV)

Check Item	Checkpoint	Description
Focus	Mirror	Angle ·····45° ±15′
		Operation·····There shall be no play, two-step movement, improper timing, bounds within the image plane, etc.
		Inclination ···Shall be within 0.4 mm for the light shield plate in the up position.
	Body back (Pressure plate back)	43.70±0.1 mm (from the pressure plate margin to the lens mounting surface)
	Finder back	43.565±0.025 mm
Others	MC levers	Operation·····There shall exist no roughness, contact or touch, abnormal sound, etc.
	Lens removal and installation	Check removal and installation torque (light or heavy), lock, unlock, play.
	Back cover	• Opening/closing···Back cover shall float spontaneously when the rewind knob is pulled up. There shall be no remarkable play when back cover is closed.
	Pressure plate	There shall be no distortion, protrusion, concave, foreign matter attachments, etc.
	Battery chamber	Contact ·····There shall be no abrasion, corrosion, stains, etc.
	Compatibility with accessories	Interchangeability with Motor Drive 1 (8740) and Auto Winder G (8731-200) ···With 8740 and 8731 installed, check the functions.
Voltage regulations, etc.		• Battery consumption with LEDs ON (4 LEDs lighting ON in M mode)····· 9.5 mA or less (Voltage 2.8 V) • Leak current at main SW. ON·····10μA or less (Voltage 2.8 V) • Leak current at main SW. OFF·····2μA or less (Voltage 2.8 V)

I N D E X

Part No.	Page
2017-0103	8
2025-0110	3
2017-0113	4,14
2024-0130	4
2025-0139	2
2006-0140	3
2024-0147	2
2025-0151	2
2017-0153	8
2017-0163	6
2024-0166	15
2017-0175	6
2025-0195	2
2025-0197	2
2017-0201	16
2017-0207	16
2017-0209	17
2017-0211	16
2006-0215	17
2017-0216	16
2017-0218	16
2017-0219	16
2017-0226	17
2017-0227	17
2017-0229	17
2017-0242	17
2024-0248	1
2024-0249	4
2017-0252	9
2017-0253	16
2024-0255	5
2024-0256	9
2017-0258	16
2024-0261	1
2017-0267	16
2023-0274	15
2023-0281	1
2023-0301	1
2017-0307	12
2017-0308	12
2017-0310	12
2017-0312	12
2017-0322	12
2017-0323	5
2017-0328	12
2017-0331	13
2024-0332	1
2017-0338	12
2024-0341	11
2017-0345	11
2024-0350	13
2017-0352	13
2025-0401	15,18
2023-0404	15
2024-0412	1
2017-0415	1
2025-0416	1
2024-0418	8
2024-0420	5
2024-0422	6
2024-0491	18
2024-0505	10
2017-0510	7
2024-0511	10
2024-0512	9
2017-0517	10
2017-0519	10
2024-0530	9
2024-0534	8
2024-0539	9
2024-0542	7
2024-0550	7
2017-0570	9
2017-0571	9
2025-0583	7
2006-0881	4

I N D E X

Part No.	Page
2023-1005	6
2017-1006	8
2017-1007	1
2017-1008	8
2017-1009	1
2025-1010	6
2017-1011	6
2006-1014	8
2024-1015	4
2024-1016	4
2006-1018	2
2024-1021	4
2024-1023	4
2024-1024	4
2024-1025	4
0031-1027	4
0031-1034	4
2025-1038	14
2017-1041	14
2006-1042	14
2017-1043	14
2024-1052	2
2017-1054	2
2017-1057	2
2005-1061	6
2005-1062	6
2005-1063	6
2017-1064	6
2024-1085	1
2025-1107	3
2017-1110	14
2024-1111	14
2006-1112	14
2006-1116	3
2017-1117	3
2006-1119	3
2025-1202	3
2025-1205	3
2025-1319	1
2017-1321	1
2017-1323	1
2017-1325	1
2017-1327	1
2024-1344	1
2024-1345	1
2017-1349	14
2025-1351	1
2025-1353	1
2023-1356	1
2025-1357	1
2025-1359	2
2017-1360	1
2017-1365	4
2007-1415	3
2023-2007	15
2023-2022	1
2019-2023	1
2024-2052	2
2019-2067	1
2017-2104	17
2017-2105	17
2017-2108	16
2006-2114	17
2017-2123	17
2017-2126	17
2006-2130	17
2017-2131	17
2017-2132	17
2006-2144	17
2017-2147	17
2017-2148	17
2017-2157	16
2017-2166	16
2017-2168	16
2017-2183	16

I N D E X

Part No.	Page
2006-2184	16
2017-2184	16
2017-2185	17
2017-2189	16
2017-2191	16
2017-2192	16
2017-2205	8,16
2017-2212	16
2017-2517	9
2017-2519	9
2006-2718	16
2006-2749	16
2006-2758	16
2006-2762	16
2006-2773	16
2017-3005	1
2006-3009	12
2017-3010	5
2017-3013	1
2017-3020	12
2017-3021	12
2017-3025	12
2017-3026	12
2017-3027	12
2017-3032	12
2017-3037	13
2006-3040	12
2017-3041	13
2024-3042	13
2017-3048	12
2017-3051	13
2006-3053	13
2017-3055	13
2017-3056	12
2017-3057	12
2017-3058	12
2017-3065	12
2017-3066	12
2019-3303	1
2017-3304	14
2019-3306	1
2019-3308	14
2017-3309	14
2024-3311	1
2017-3312	14
2017-3403	11
2017-3404	11
2017-3405	11
2017-3407	11
2017-3410	11
2017-3414	11
2017-3416	11
2017-3421	13
2017-3422	11
2017-3424	11
2023-4002	4
2025-4013	2
2024-4023	2
2025-4024	2
2017-4216	5
2017-4222	5
2023-4256	2
2024-4301	18
2024-4302	18
2017-5006	4
2024-5008	4
2017-5013	7
2017-5014	7
2017-5015	7
2017-5016	7
2017-5017	7
2017-5018	7
2017-5019	10
2025-5021	10
2017-5025	10

I N D E X

Part No.	Page
2017-5026	10
2017-5027	10
2017-5028	10
2017-5029	10
2017-5030	10
2017-5031	7
2017-5032	7
2024-5033	4
2017-5034	7
2009-5038	8
2006-5039	6,7
2025-5079	6
2024-5106	9
2006-5112	10
2024-5114	10
2006-5119	10
2024-5121	9
2024-5805	7
2019-5806	10
2017-9001	10
2005-9005	9
2017-9011	12
2017-9012	12
2024-9101	8
2017-9106	7
2017-9107	8
2017-9108	12
2017-9113	5
2017-9114	4
2006-9121	14
2023-9245	2
2006-9401	14
2017-9430	11
2017-9441	12
2017-9443	5
Screw	
9611-1616-12	10
9611-1620-07	4,6
9611-1625-01	8
9611-1625-07	6,8
9611-1630-04	14
9611-2030-01	5
9611-2040-04	6
9612-1616-07	16
9612-1620-07	10
9612-1625-01	16
9612-1625-07	8,9,16
9612-1630-07	6,8
9612-1632-12	12
9612-1635-07	6
9612-1640-07	15
9612-1670-01	4
9612-2080-07	4,14
9613-1418-07	17
9613-1645-01	2
9615-1416-07	17
9761-1725-07	12
9761-1730-07	4,5
9761-1740-07	14
9761-1755-07	1
9761-2035-07	5
9761-2040-07	13
9761-2050-07	4,5
9761-2060-07	5
9762-1735-07	2,4
9762-1740-07	7
9762-1745-01	2
9762-1745-07	4
9762-2040-07	12
9762-2045-07	14
9762-2060-07	11
9763-1735-07	4
9765-1740-07	4,7

I N D E X

Part No.	Page
E-ring	
9721-0080-50	9
9721-0120-13	15,16,17
9721-0150-13	9,13,16,17
9721-0200-13	5
Washer	
9791-2140-40	17
9792-2140-40	12
ELECTRO PARTS	
9362-1032-01	18
9362-1032-02	18
9362-1032-03	18
9362-1032-04	18
9362-1261-01	18
9362-1261-02	18
9362-1261-03	18
9363-1032-01	18
9363-1032-02	18
9363-1032-03	18
9373-4162-01	18
9422-1016-62	18
9422-1026-62	18

Part No.	Page
9422-1246-62	18
9422-1846-62	18
9422-3946-62	18
9422-6836-62	18
9422-8236-62	18
9431-3348-62	18
9432-1068-61	18
9432-1536-62	18
9432-2068-61	18
9432-2246-62	18
9432-3068-61	18
9432-3357-61	18
9472-1039-63	18
9472-1539-63	18
9472-3329-63	18
9531-1575-61	18
9564-1034-61	18
9564-2204-65	18
9564-4734-64	18
9565-1034-64	18
9565-3324-64	18
9565-3338-65	18
9565-4705-62	18
9565-4738-65	18

Part No.	Page
Lead wires	
9391-0507-00	19
9391-0507-01	19
9391-0507-03	19
9391-0507-05	19
9391-0507-06	19
9391-0807-00	19
9391-0807-01	19
9391-0807-02	19
9391-0807-03	19
9391-0807-04	19
9391-0807-05	19
9391-0807-06	19
9391-0807-07	19
9391-0807-08	19
9391-0807-09	19
9391-0807-11	19

X-300 Code No.2025-100
X-370 Code No.2025-300

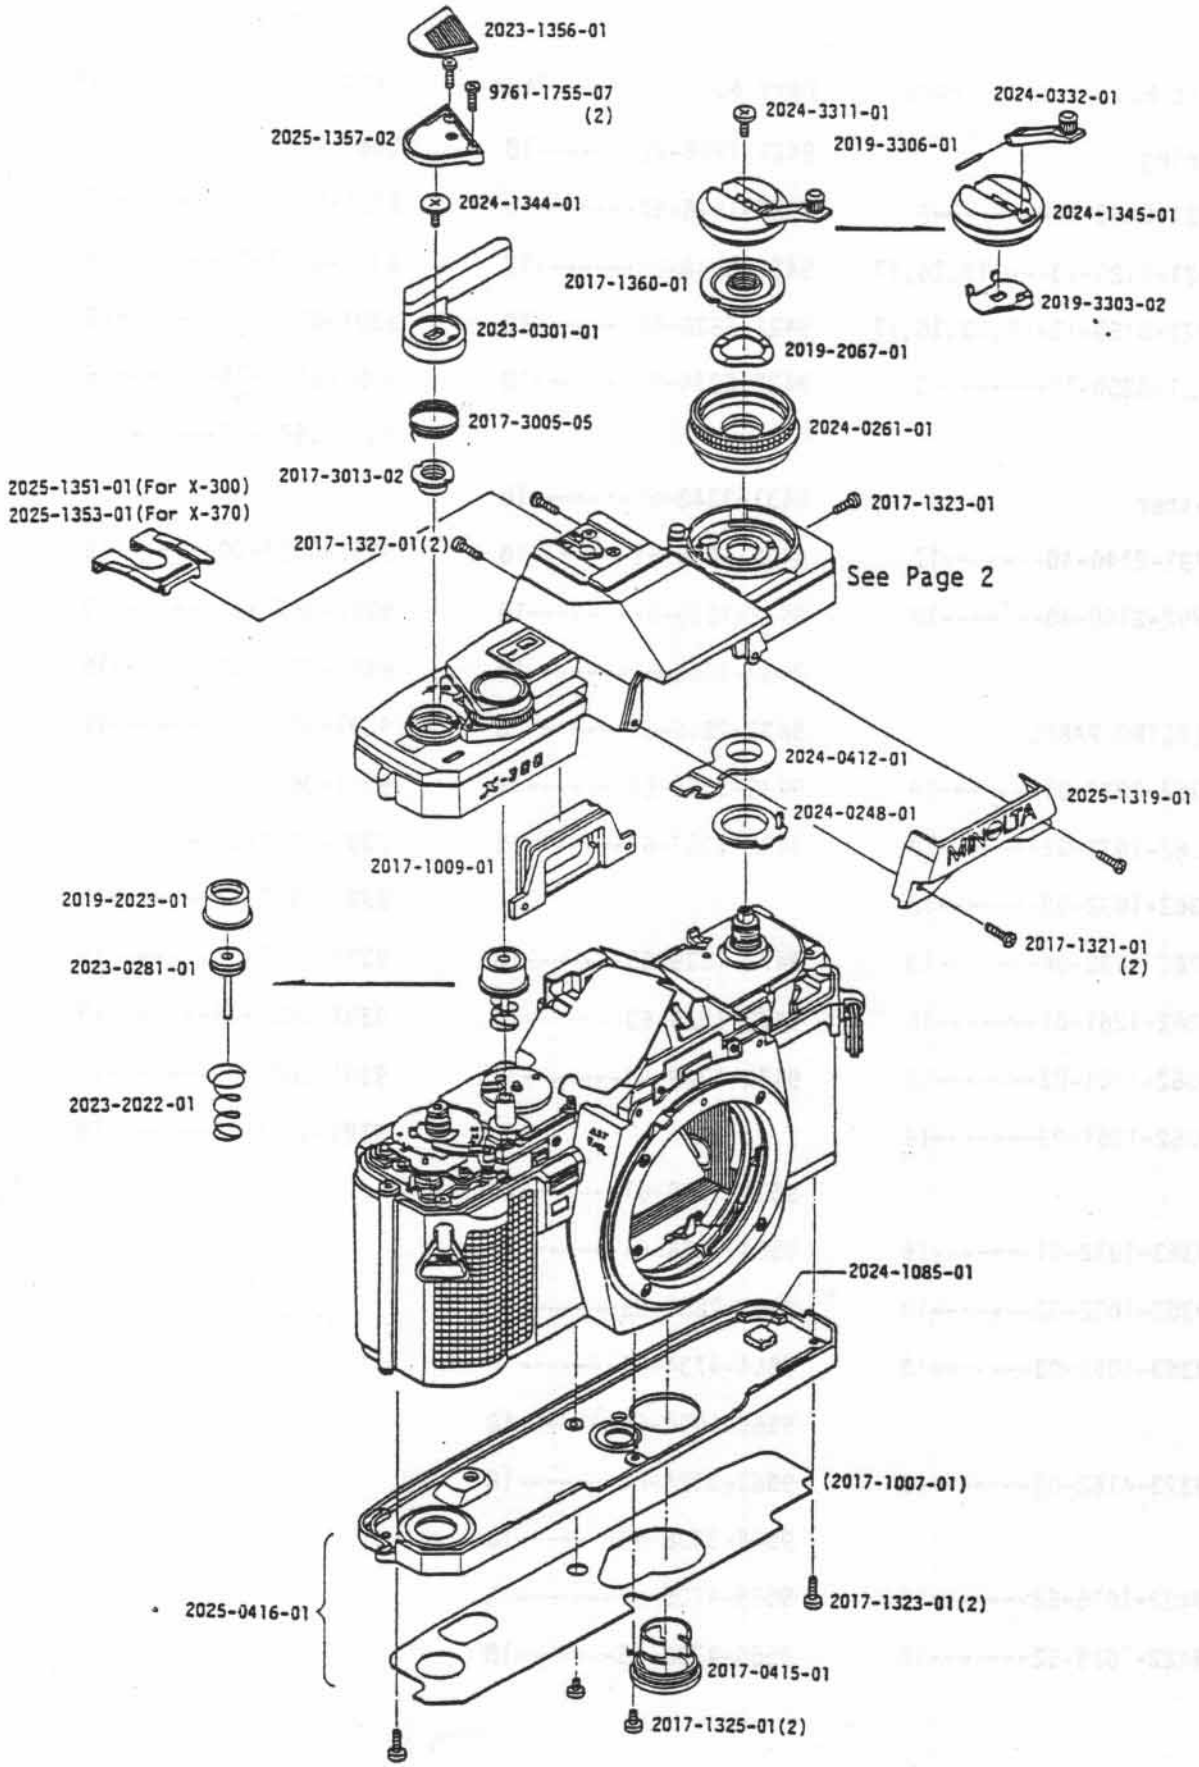

Part No.	Part Name		Qty
2024-0248-01	ASA contact holder set	ASAブラシホルダーセット	1
2024-0261-01	ASA operation knob set	ASA操作ノブセット	1
2023-0281-01	Shutter release button axis set	シャッター釦軸セット	
2023-0301-01	Film advance lever set	巻上レバーセット	1
2024-0332-01	Rewinding handle set	巻戻しハンドルセット	1
2024-0412-01	Main switch guide plate set	メインSWガイド板セット	1
2017-0415-01	Battery holder set	電池ケース蓋セット	1
2025-0416-01	Bottom cover set	下カバーセット	1
(2017-1007-01)	Bottom cover sheet	下カバー保護シート	1
2017-1009-01	Eye-piece frame	接眼枠	1
2024-1085-01	Sponge	コンデンサーガタ止め	1
2025-1319-01	Front top cover	上部正面カバー	1
2017-1321-01	Screw	止めねじ	2
2017-1323-01	Screw	止めねじ	3
2017-1325-01	Screw	止めねじ	2
2017-1327-01	Screw	止めねじ	2
2024-1344-01	Winding lever pressure	巻上レバー押えビス	1
2024-1345-01	Rewinding knob	巻戻しノブ	1
2025-1351-01	Accessory shoe spring (for X-300)	アクセサリーシューバネ	1
2025-1353-01	Accessory shoe spring (for X-370)	アクセサリーシューバネ	1
2023-1356-01	Finger rest leather	フインガーレスト貼皮	1
2025-1357-02	Finger rest	フインガーレスト	1
2017-1360-01	ASA dial nut	ASA押えナット	1
2023-2022-01	Shutter release button spring	シャッター釦SP	1
2019-2023-01	Shutter release button cap	シャッター釦キャップ	1
2019-2067-01	Pressure spring	ASA操作リング押えばね	1
2017-3005-05	Film advance lever spring	巻上レバー戻しSP	1
2017-3013-02	Top cover nut	上カバー止めナット	1
2019-3303-02	Rewinding handle spring	巻戻しハンドルばね	1
2019-3306-01	Rewinding handle axis	巻戻しハンドル軸	1
2024-3311-01	Rewinding handle screw	巻戻しノブビス	1
9761-1755-07	Tap tite screw	十字穴付タップタイトねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

Assy Part No.2025-0195-01(For X-300)
Assy Part No.2025-0197-01(For X-370)

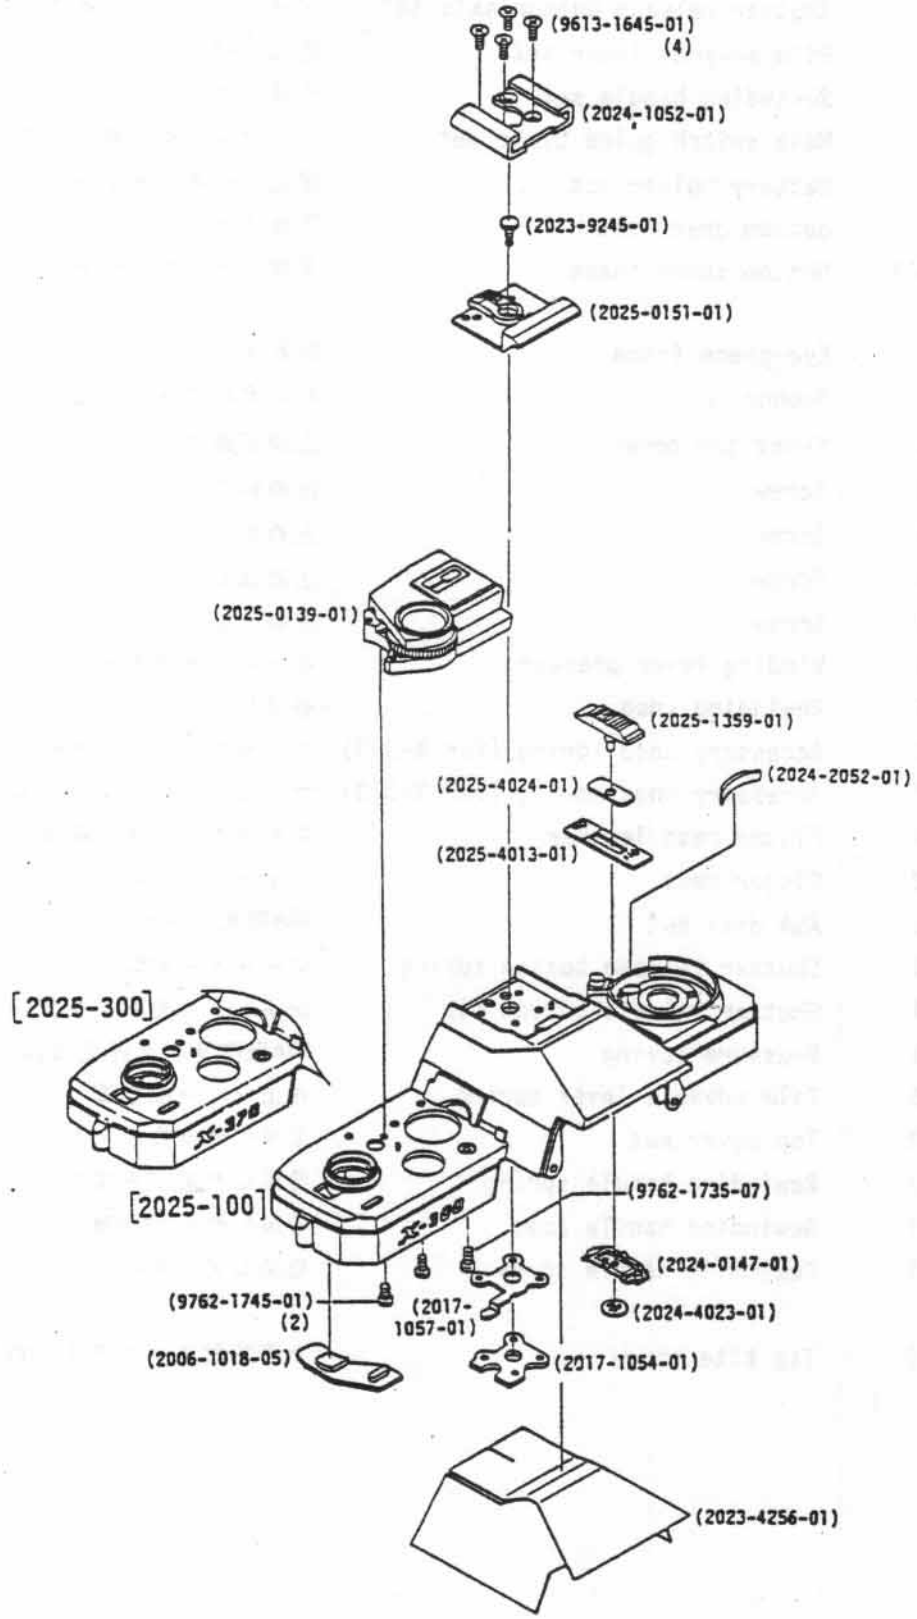

Part No.	Part Name		Qty
2025-0195-01	Top cover set (For X-300)	上カバーセット	1
2025-0197-01	Top cover set (For X-370)	上カバーセット	1
(2025-0139-01)	Shutter dial set	シャッターダイヤルセット	1
(2024-0147-01)	Click plate set	メインSWクリックバネセット	1
(2025-0151-01)	Accessory shoe base set	アクセサリーシュー座セット	1
(2006-1018-05)	Counter window	カウンター窓	1
(2024-1052-01)	Accessory shoe	アクセサリーシュー	1
(2017-1054-01)	Accessory shoe set plate	アクセサリーシュー取付板	1
(2017-1057-01)	Contact-C	コンタクト接片C	1
(2025-1359-01)	Main switch	メインSW切換レバー	1
(2024-2052-01)	ASA window	ASA窓	1
(2025-4013-01)	Main switch plate	メインSW銘板	1
(2024-4023-01)	Snaping ring	メインSW止め輪	1
(2025-4024-01)	Main switch sheet	メインSWレバーシート	1
(2023-4256-01)	Top cover isolation sheet	上カバー絶縁シート	1
(2023-9245-01)	Contact-A	コンタクト接点A	1
(9613-1645-01)	Phillips type screw	十字穴付半丸皿小ねじ	4
(9762-1735-07)	Tap tite screw	十字穴付なべタップタイトねじ	1
(9762-1745-01)	Tap tite screw	十字穴付なべタップタイトねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

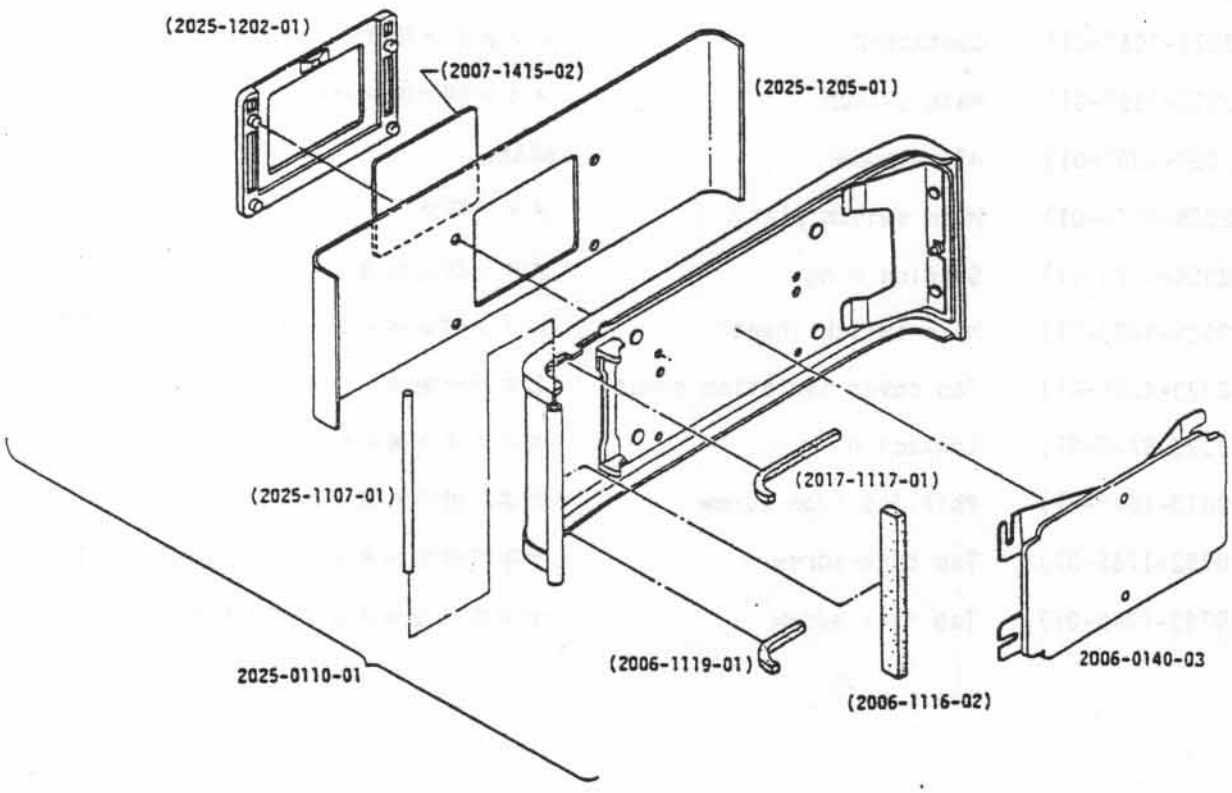

Part No.	Part Name		Qty
2025-0110-01	Back cover set	裏蓋セット	1
(2025-1107-01)	Hinge axis	ヒンジ軸	1
(2006-1116-02)	Back cover light shield plate	裏蓋遮光片	1
(2017-1117-01)	Back cover light shield plate-C	裏蓋遮光片	1
(2006-1119-01)	Back cover light shield plate-B	裏蓋遮光片	1
(2025-1202-01)	Memo holder	裏蓋ポケット	1
(2025-1205-01)	Back cover leather	裏蓋貼皮	1
(2007-1415-02)	Conversion scale	ASA / ISO換算板	1
2006-0140-03	Pressure plate set	IF清板セット	1

X-300 Code No.2025-100
X-370 Code No.2025-300

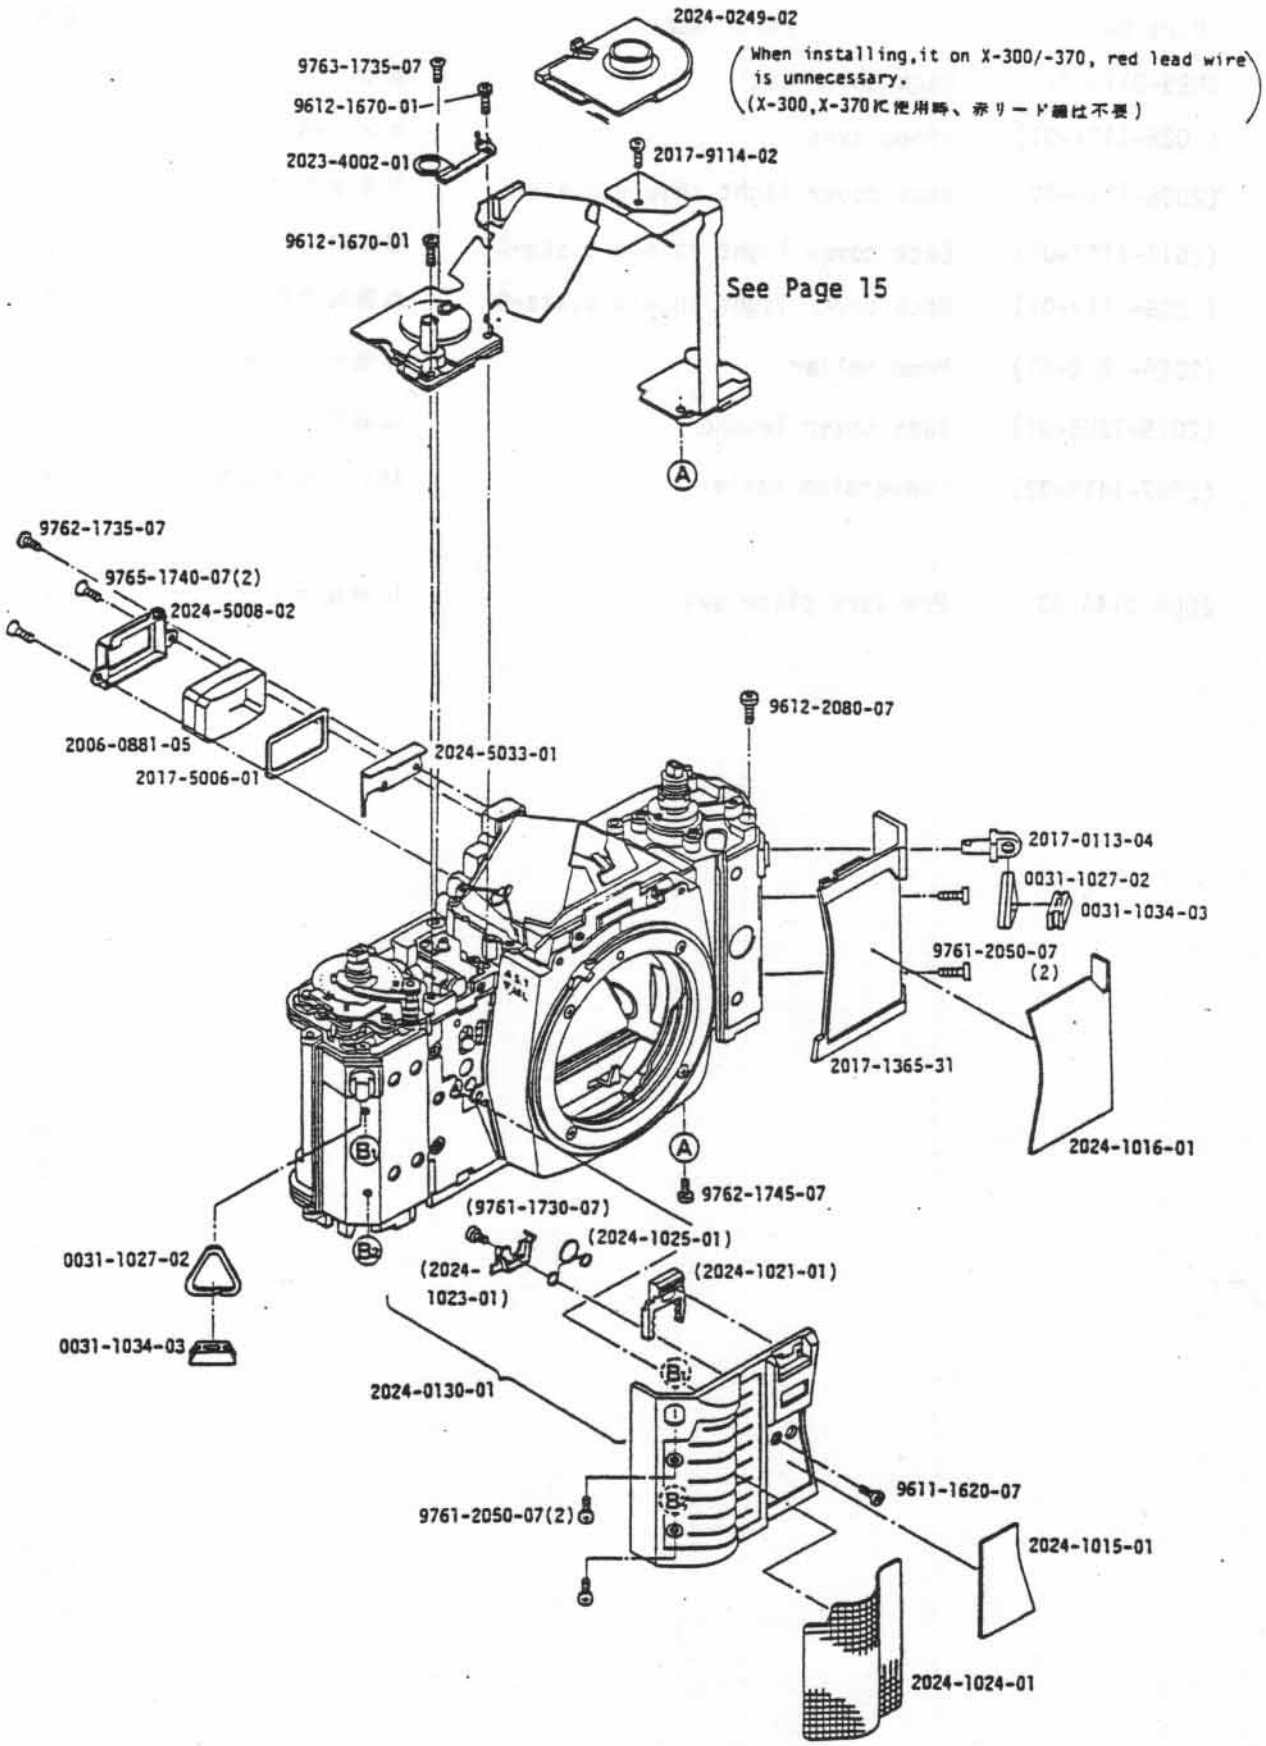

Part No.	Part Name		Qty
2017-0113-04	Strap hanger set	吊環セット	1
2024-0130-01	Side cover-A set	サイドカバーAセット	1
(2024-1021-01)	Self-timer lever	セルフレバー	1
(2024-1023-01)	Click spring	セルフクリックバネ	1
(2024-1025-01)	Self-timer lever spring	セルフレバーSP	1
(9761-1730-07)	Tap tite screw	十字穴付なべタップタイトねじ	1
2024-0249-02	ASA resistor set	ASA抵抗体セット	1
2006-0881-05	Eye-piece lens set	接眼レンズセット	1
2024-1015-01	Right side leather	右貼皮	1
2024-1016-01	Left side leather	左貼皮	1
2024-1024-01	Grip leather	グリップ貼皮	1
0031-1027-02	Triangle hanger	三角吊環	2
0031-1034-03	Triangle hanger stopper	三角環回り止め	2
2017-1365-31	Side cover-B	サイドカバー	1
2023-4002-01	Earth plate	タッチSWアース板	1
2017-5006-01	Eye-piece light shield plate	接眼レンズ遮光枠	1
2024-5008-02	Eye-piece pressure	接眼レンズ押え	1
2024-5033-01	Shield plate	シールド板	1
2017-9114-02	Screw	止めねじ	1
9611-1620-07	Phillips type screw	十字穴付なべ小ねじ	1
9612-1670-01	Phillips type screw	十字穴付なべ小ねじ	2
9612-2080-07	Phillips type screw	十字穴付なべ小ねじ	1
9761-2050-07	Tap tite screw	十字穴付なべタップタイトねじ	4
9762-1735-07	Tap tite screw	十字穴付なべタップタイトねじ	1
9762-1745-07	Tap tite screw	十字穴付なべタップタイトねじ	1
9763-1735-07	Tap tite screw	十字穴付半丸皿タップタイトねじ	1
9765-1740-07	Tap tite screw	十字穴付皿タップタイトねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

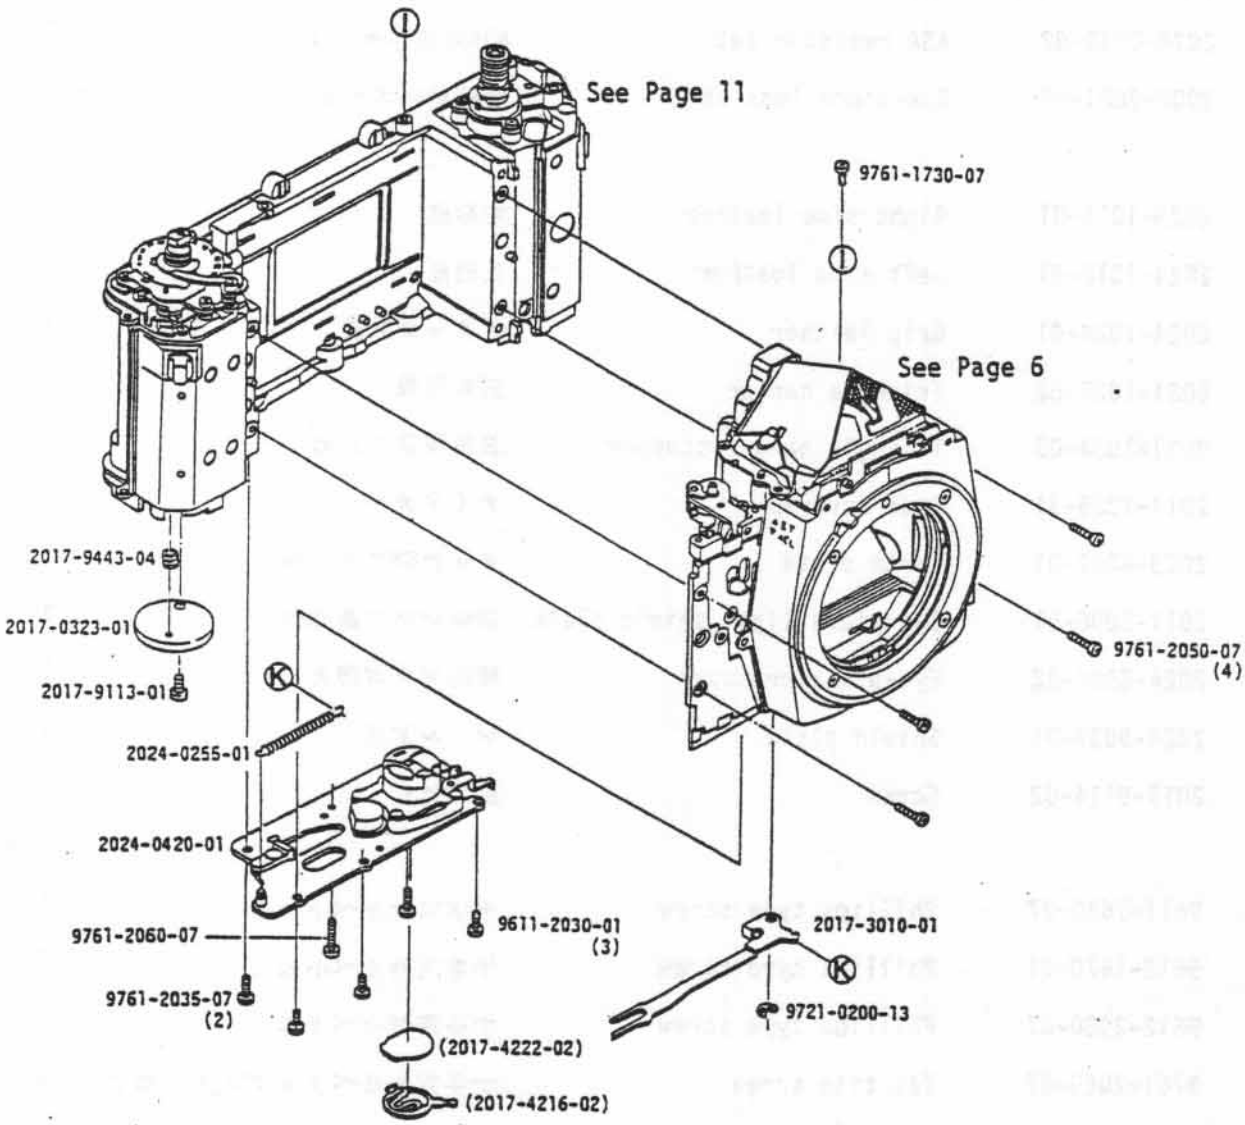

Part No.	Part Name		Qty
2024-0255-01	MP return sub spring-B set	MP戻し補助SP－Bセット	1
2017-0323-01	Winder coupler set	ワインダーカプラーセット	1
2024-0420-01	Battery case base plate set	電池ケース台板セット	1
(2017-4216-02)	Battery contact (+)	電池接片（＋）	1
(2017-4222-02)	Battery light shield plate	電池ケース遮光板	1
2017-3010-01	Charge lever	チャージレバー	1
2017-9113-01	Screw	止めねじ	1
2017-9443-04	Charge lever roller	チャージレバーローラー	1
9611-2030-01	Phillips type screw	十字穴付なべ小ねじ	3
9721-0200-13	E ring	E リング	1
9761-1730-07	Tap tite screw	十字穴付なべタップタイトねじ	1
9761-2035-07	Tap tite screw	十字穴付なべタップタイトねじ	2
9761-2050-07	Tap tite screw	十字穴付なべタップタイトねじ	4
9761-2060-07	Tap tite screw	十字穴付なべタップタイトねじ	1

X-300 Code No.2025-100
X-370 Code No.2025-300

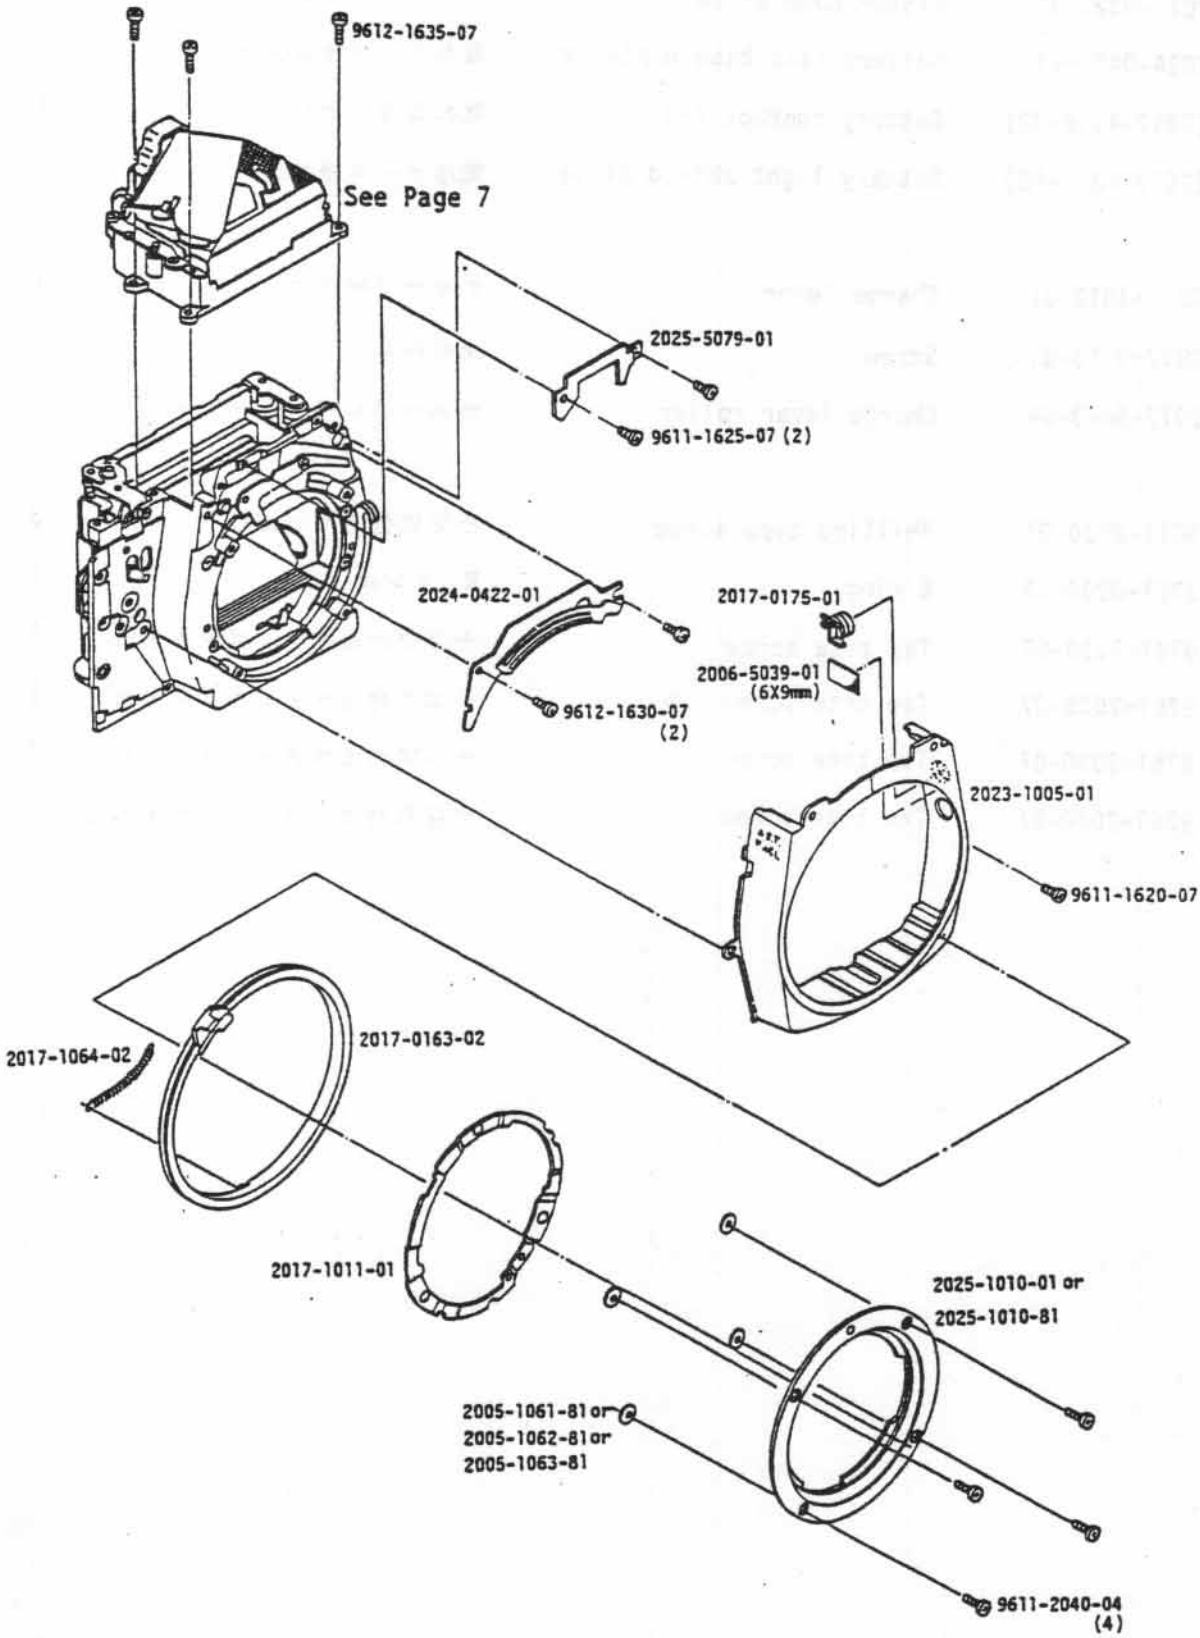

Part No.	Part Name		Qty
2017-0163-02	Aperture coupling ring set	連結リングセット	1
2017-0175-01	Lens lock button set	レンズロック釦セット	1
2024-0422-01	AV resistor plate set	AV抵抗板セット	1
2023-1005-01	Front cover	前カバー	1
2025-1010-01	Bayonet lens mount	バヨネット座板	1
2025-1010-81	Bayonet lens mount (-0.1mm)	バヨネット座板	
2017-1011-01	Bayonet spring	バヨネットSP	1
2005-1061-81	Adjustment washer-A (0.02mm)	調整ワッシャー A	Some
2005-1062-81	Adjustment washer-B (0.05mm)	調整ワッシャー B	
2005-1063-81	Adjustment washer-C (0.1mm)	調整ワッシャー C	
2017-1064-02	Aperture coupling ring spring	連結リングSP	1
2006-5039-01	Penta. pressure tape (Per roll)	ペンタ押え板テープ	1
2025-5079-01	Front cover plate	前カバー当り板	1
9611-1620-07	Phillips type screw	十字穴付なべ小ねじ	1
9611-1625-07	Phillips type screw	十字穴付なべ小ねじ	2
9611-2040-04	Phillips type screw	十字穴付なべ小ねじ	4
9612-1630-07	Phillips type screw	十字穴付なべ小ねじ	2
9612-1635-07	Phillips type screw	十字穴付なべ小ねじ	3

X-300 Code No.2025-100
X-370 Code No.2025-300

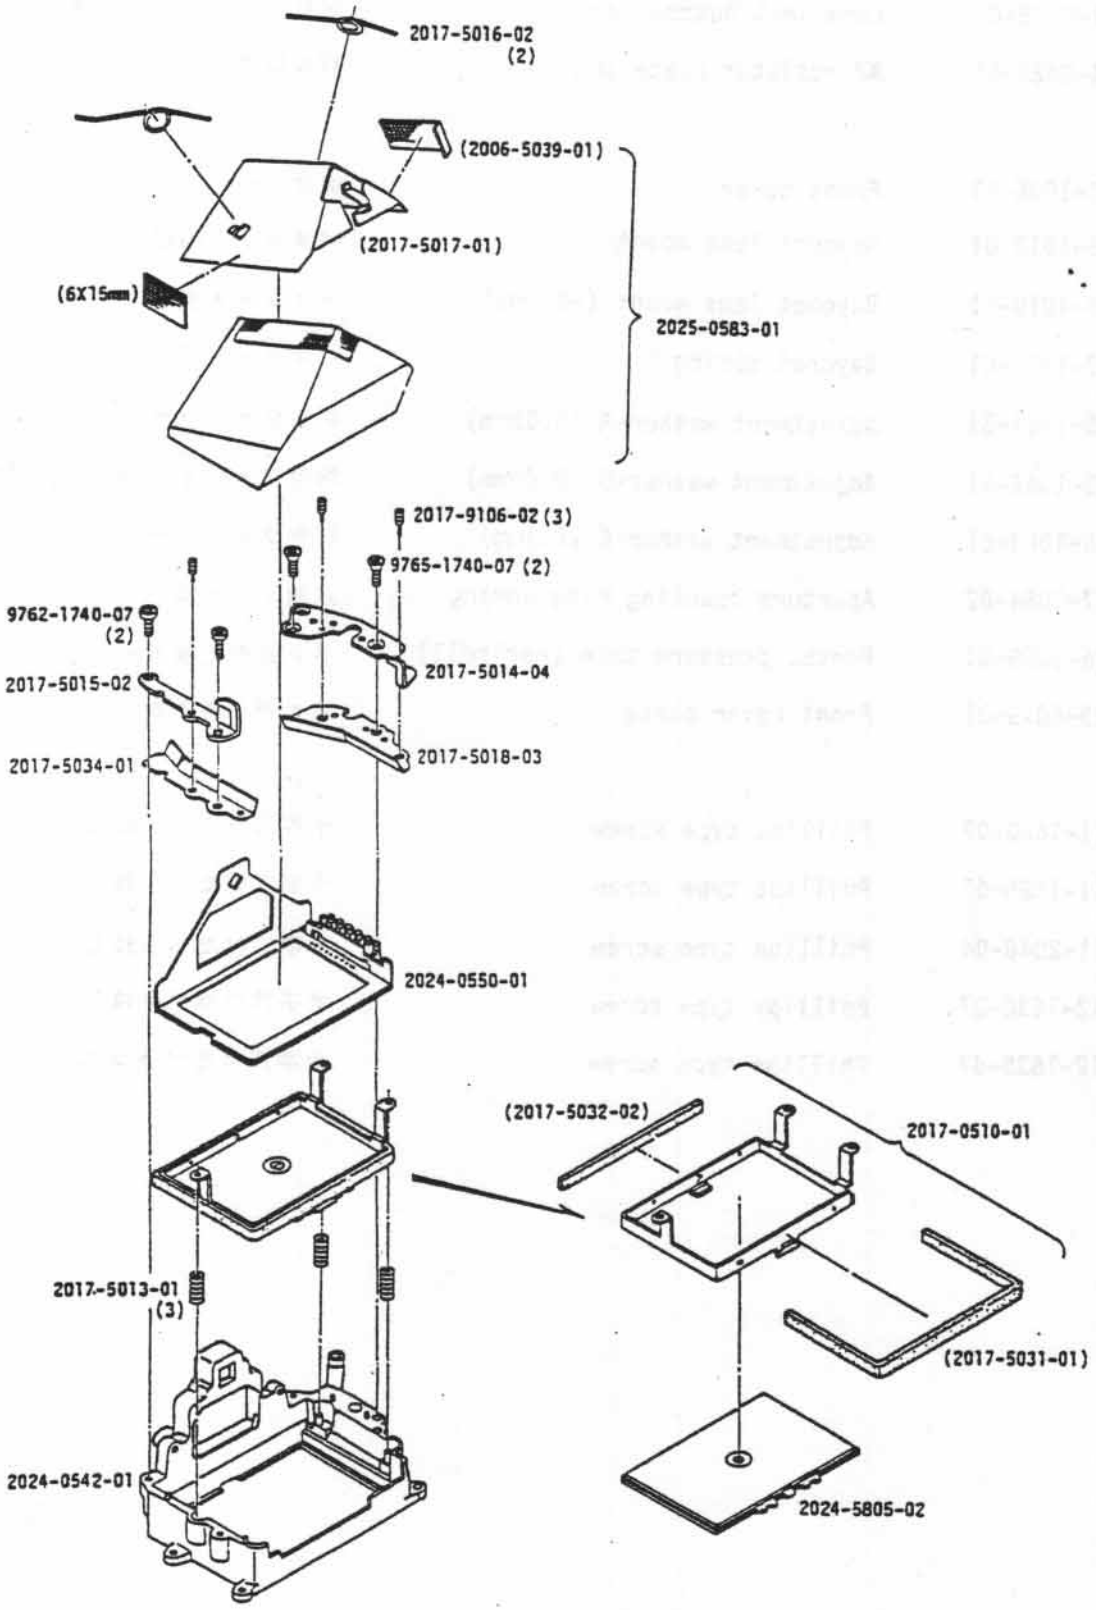

Part No.	Part Name		Qty
2017-0510-01	Fresnel lens holder set	焦点板ホルダーセット	1
(2017-5031-01)	Packing A	防塵モルトプレンA	1
(2017-5032-02)	Packing B	防塵モルトプレンB	1
2024-0542-01	Penta. holder set	ペンタホルダーセット	1
2024-0550-01	Penta. receiver set	ペンタ受けセット	1
2025-0583-01	Penta. prism set	ペンタプリズムセット	1
(2017-5017-01)	Penta. pressure plate	ペンタ押え板	1
(2006-5039-01)	Penta. pressure tape (Per roll)	ペンタ押え板テープ	2
2017-5013-01	Fresnel lens holder spring	焦点板ホルダーSP	3
2017-5014-04	Penta. pressure (Left side)	ペンタ押え板（左）	1
2017-5015-02	Penta. pressure (Right side)	ペンタ押え板（右）	1
2017-5016-02	Penta. pressure spring	ペンタ押えSP	2
2017-5018-03	L.E.D. diffusion plate	LED拡散板	1
2017-5034-01	Dustproof sheet	防塵シート	1
2024-5805-02	Fresnel lens	焦点板	1
2017-9106-02	Screw	焦点板調整ねじ	3
9762-1740-07	Tap tite screw	十字穴付なべタップタイトねじ	2
9765-1740-07	Tap tite screw	十字穴付皿タップタイト ねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

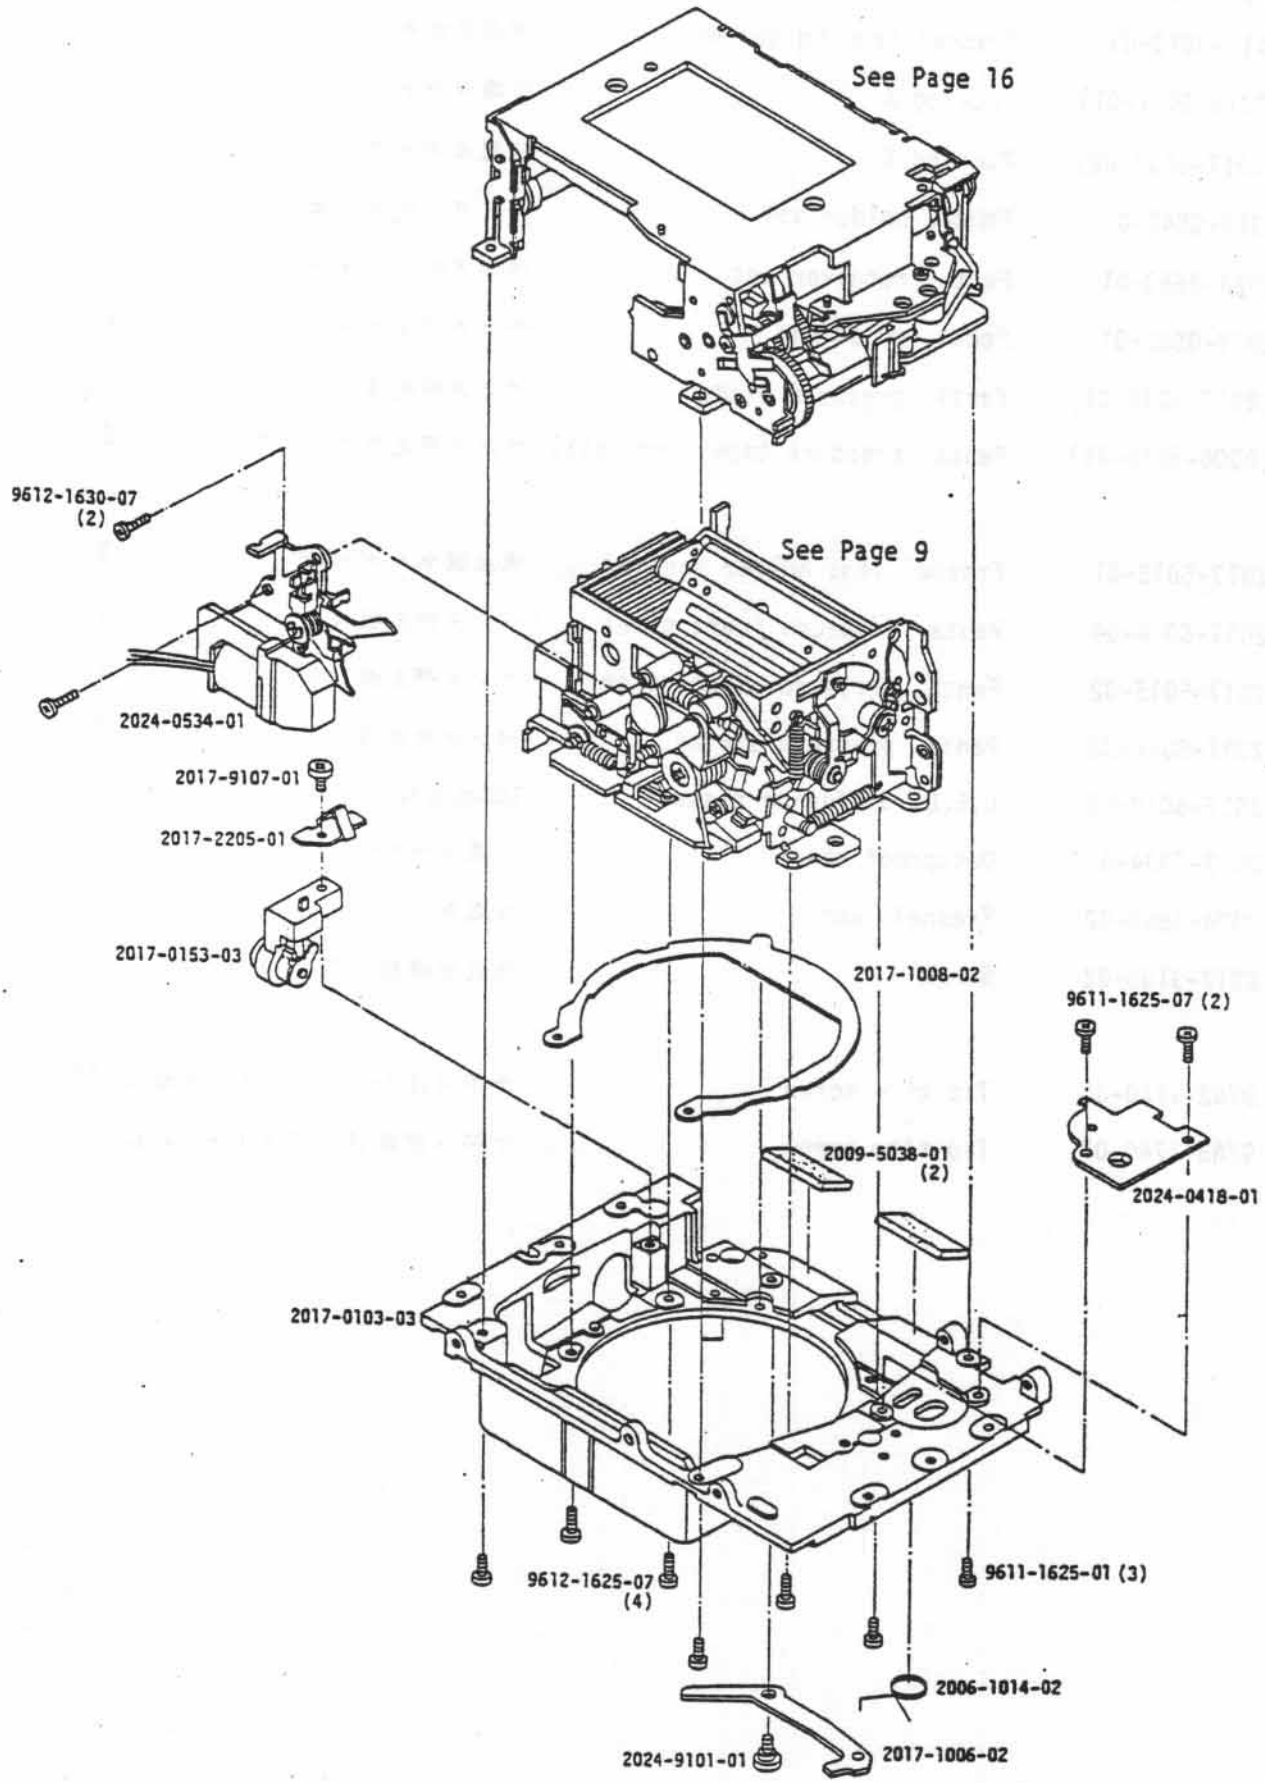

Part No.	Part Name		Qty
2017-0103-03	Front base plate set	前枠セット	1
2017-0153-03	Remote control terminal set	リモコン台板セット	1
2024-0418-01	Self-timer plate set	セルフSW基板セット	1
2024-0534-01	Magnetic release base plate set	絞りストップ台板セット	1
2017-1006-02	Lens lock lever	レンズロックレバー	1
2017-1008-02	Mirror box light shield plate	ミラーボックス遮光板	1
2006-1014-02	Lock lever spring	ロックレバーSP	1
2017-2205-01	Lead wire pressure	コード押え	1
2009-5038-01	Penta. front cushion	ペンタ前面押えクッション	2
2024-9101-01	Lens lock axis	レンズロック軸	1
2017-9107-01	Screw	止めねじ	1
9611-1625-01	Phillips type screw	十字穴付なべ小ねじ	3
9611-1625-07	Phillips type screw	十字穴付なべ小ねじ	2
9612-1625-07	Phillips type screw	十字穴付なべ小ねじ	4
9612-1630-07	Phillips type screw	十字穴付なべ小ねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

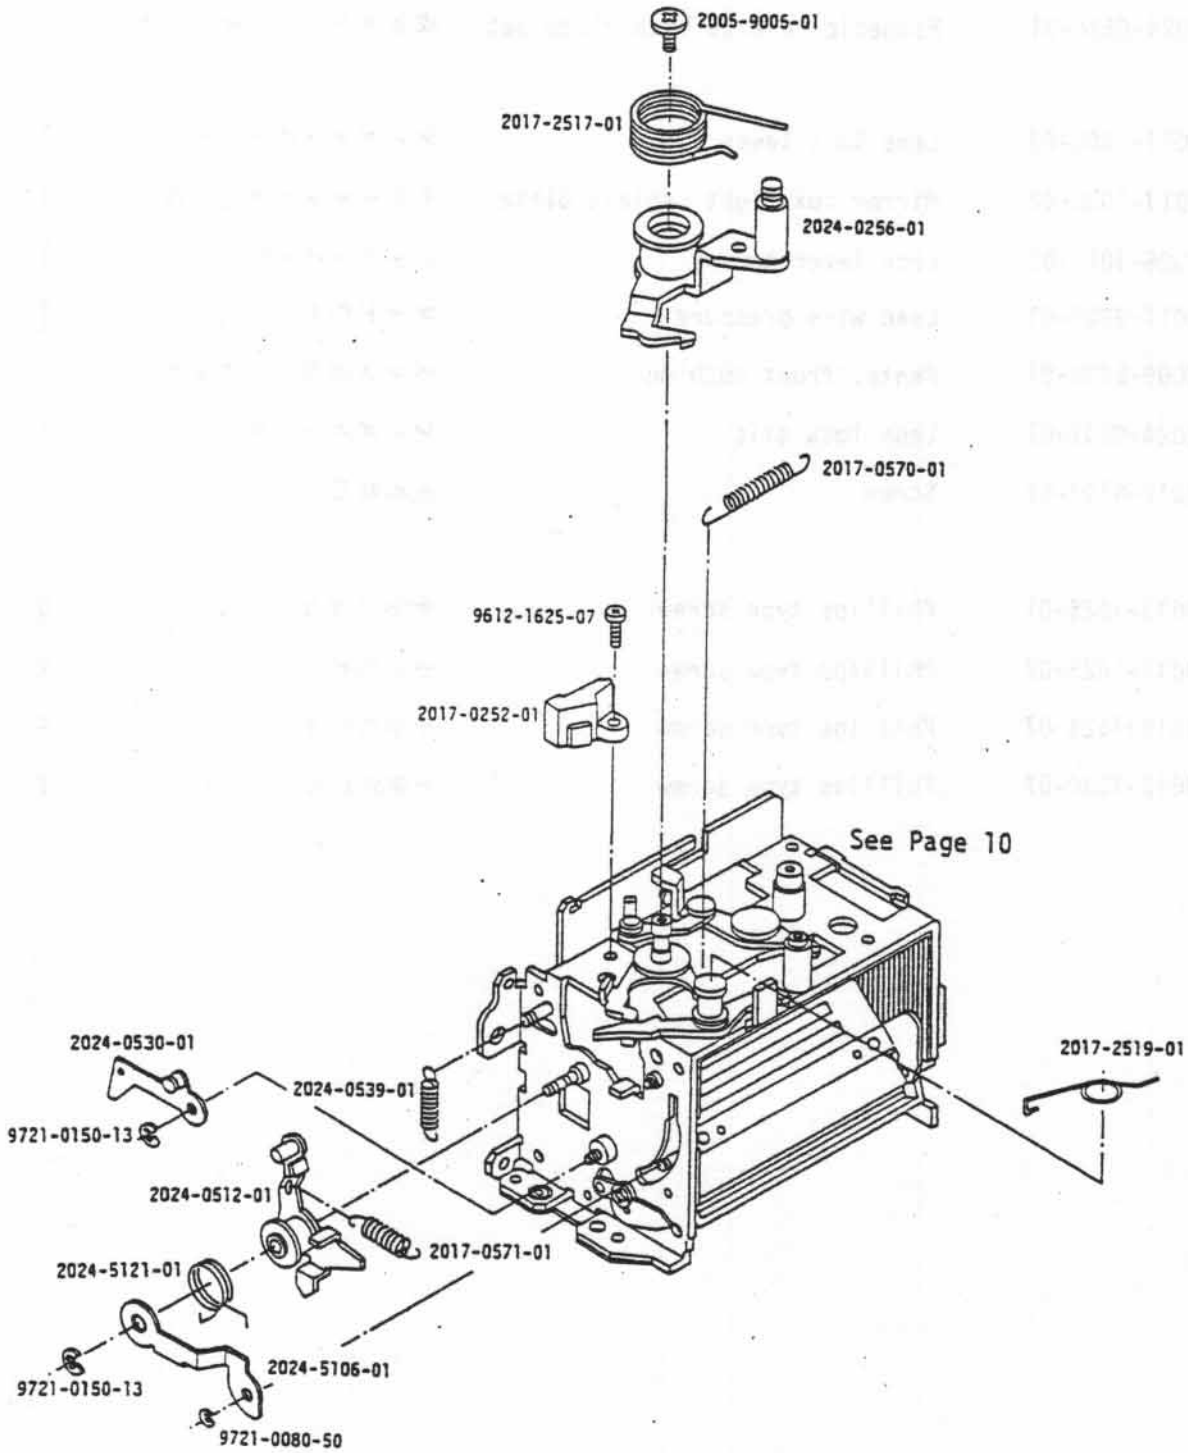

Part No.	Part Name		Qty
2017-0252-01	MP return stopper set	MP戻しストッパーセット	1
2024-0256-01	MP return lever set	MP戻しレバーセット	1
2024-0512-01	Mirror operation lever set	ミラー駆動レバーセット	1
2024-0530-01	Mirror delay lever set	ミラー遅延レバーセット	1
2024-0539-01	Mirror delay spring set	ミラー遅延SPセット	1
2017-0570-01	MP loop spring set	MPループSPセット	1
2017-0571-01	Mirror operation lever spring set	ミラー駆動SPセット	1
2017-2517-01	MP return spring	MP戻しSP	1
2017-2519-01	MP return stop lever spring	MP戻し係止レバーSP	1
2024-5106-01	Mirror operation lever-B	ミラー操作レバーB	1
2024-5121-01	Mirror operation lever-B spring	ミラー押えSP	1
2005-9005-01	Screw	MP戻しレバー押えねじ	1
9612-1625-07	Phillips type screw	十字穴付なべ小ねじ	1
9721-0080-50	E ring	E リング	1
9721-0150-13	E ring	E リング	2

X-300 Code No.2025-100
X-370 Code No.2025-300

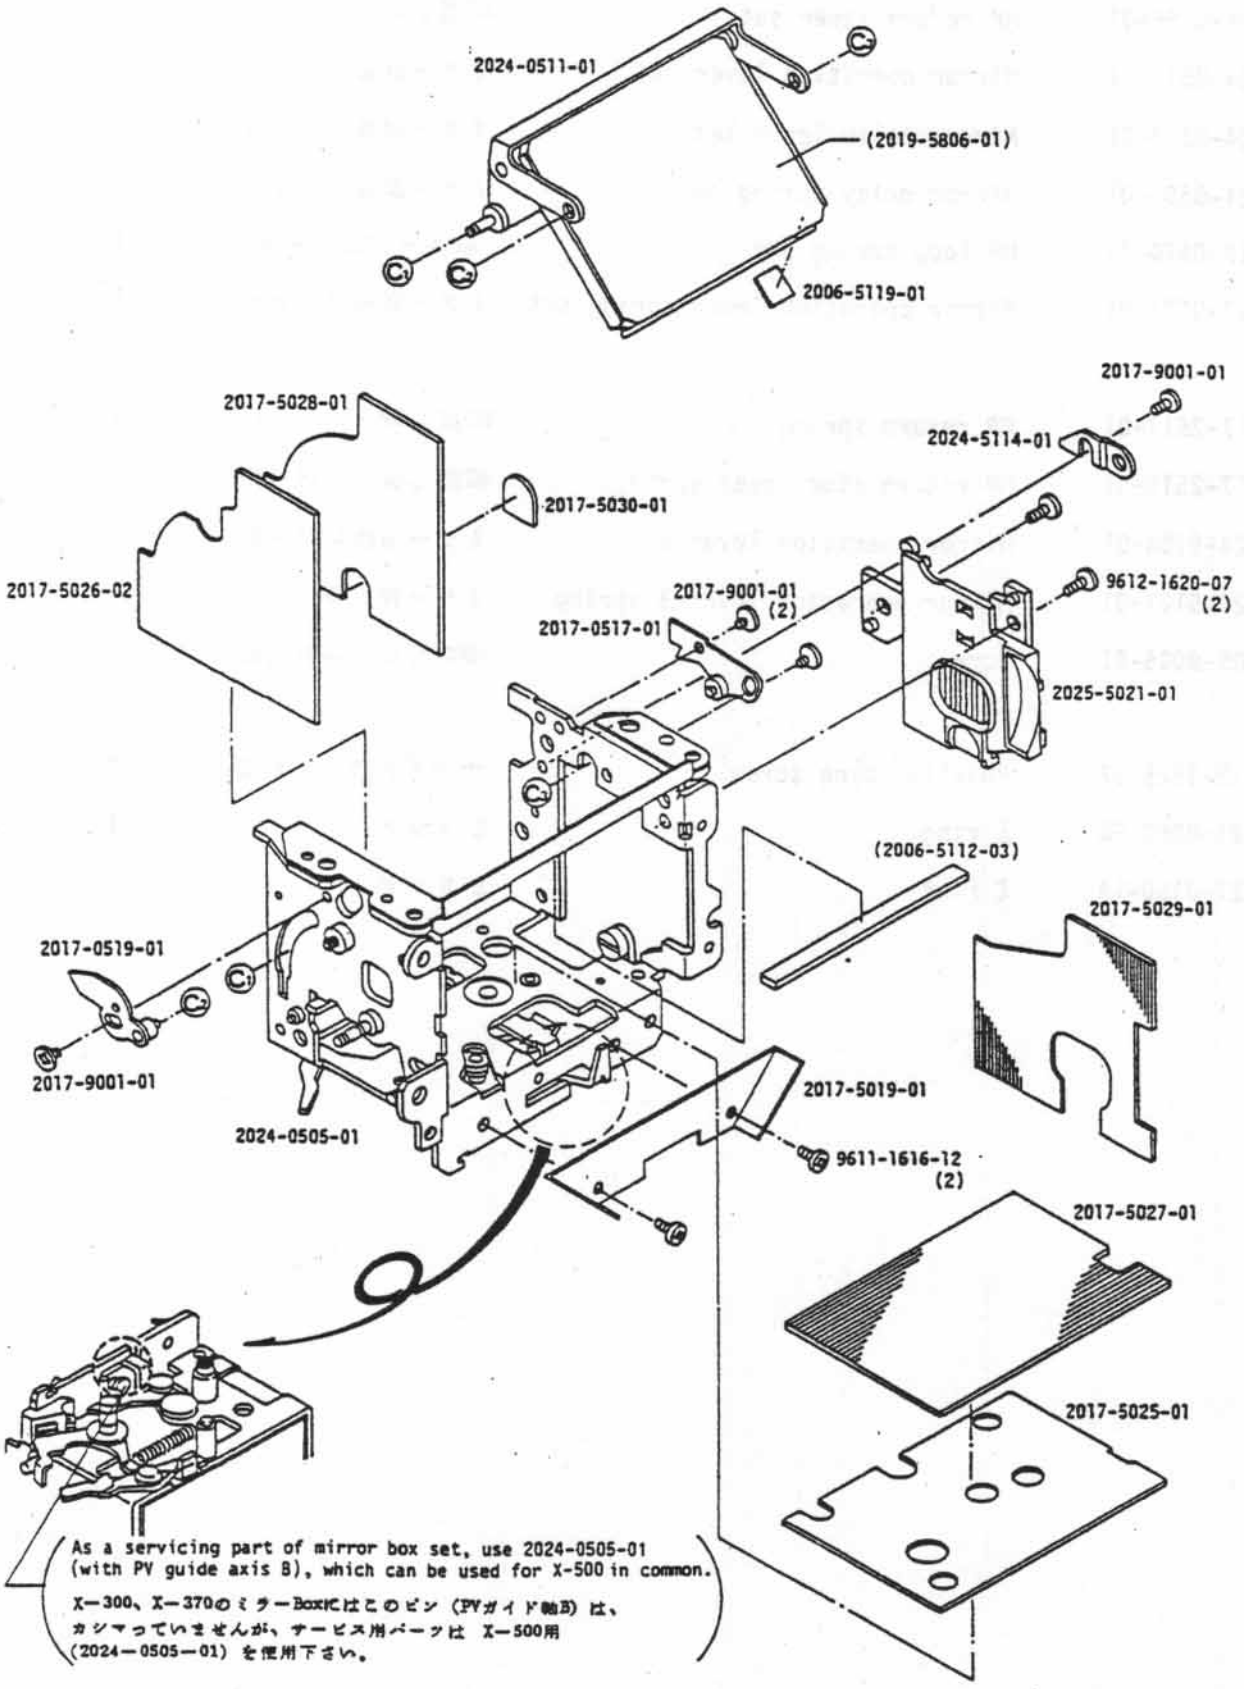

Part No.	Part Name		Qty
2024-0505-01	Mirror box set	ミラーボックスセット	1
(2006-5112-03)	Mirror cushion	ミラークッション	1
2024-0511-01	Mirror holder set	ミラーホルダーセット	1
(2019-5806-01)	Mirror	ミラー	1
2017-0517-01	Mirror adjustment plate-B set	ミラー調整板Bセット	1
2017-0519-01	Mirror adjustment plate-A set	ミラー調整板Aセット	1
2017-5019-01	Mirror box apron	ミラーボックスエプロン	1
2025-5021-01	Mirror box side plate	ミラーボックス側板	1
2017-5025-01	Flare shield bottom plate	フレアー防止シート下板	1
2017-5026-02	Flare shield right plate	フレアー防止シート右板	1
2017-5027-01	Flare shield bottom plate-A	フレアー防止シート下	1
2017-5028-01	Flare shield right plate-A	フレアー防止シート右A	1
2017-5029-01	Flare shield left plate	フレアー防止シート左	1
2017-5030-01	Flare shield right plate-B	フレアー防止シート右B	1
2024-5114-01	Mirror support stopper	ミラー補助ストッパーB	1
2006-5119-01	Mirror stopper gum	ミラーストッパーゴム	1
2017-9001-01	Screw	調整板押ビス	4
9611-1616-12	Phillips type screw	十字穴付なべ小ねじ	2
9612-1620-07	Phillips type screw	十字穴付なべ小ねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

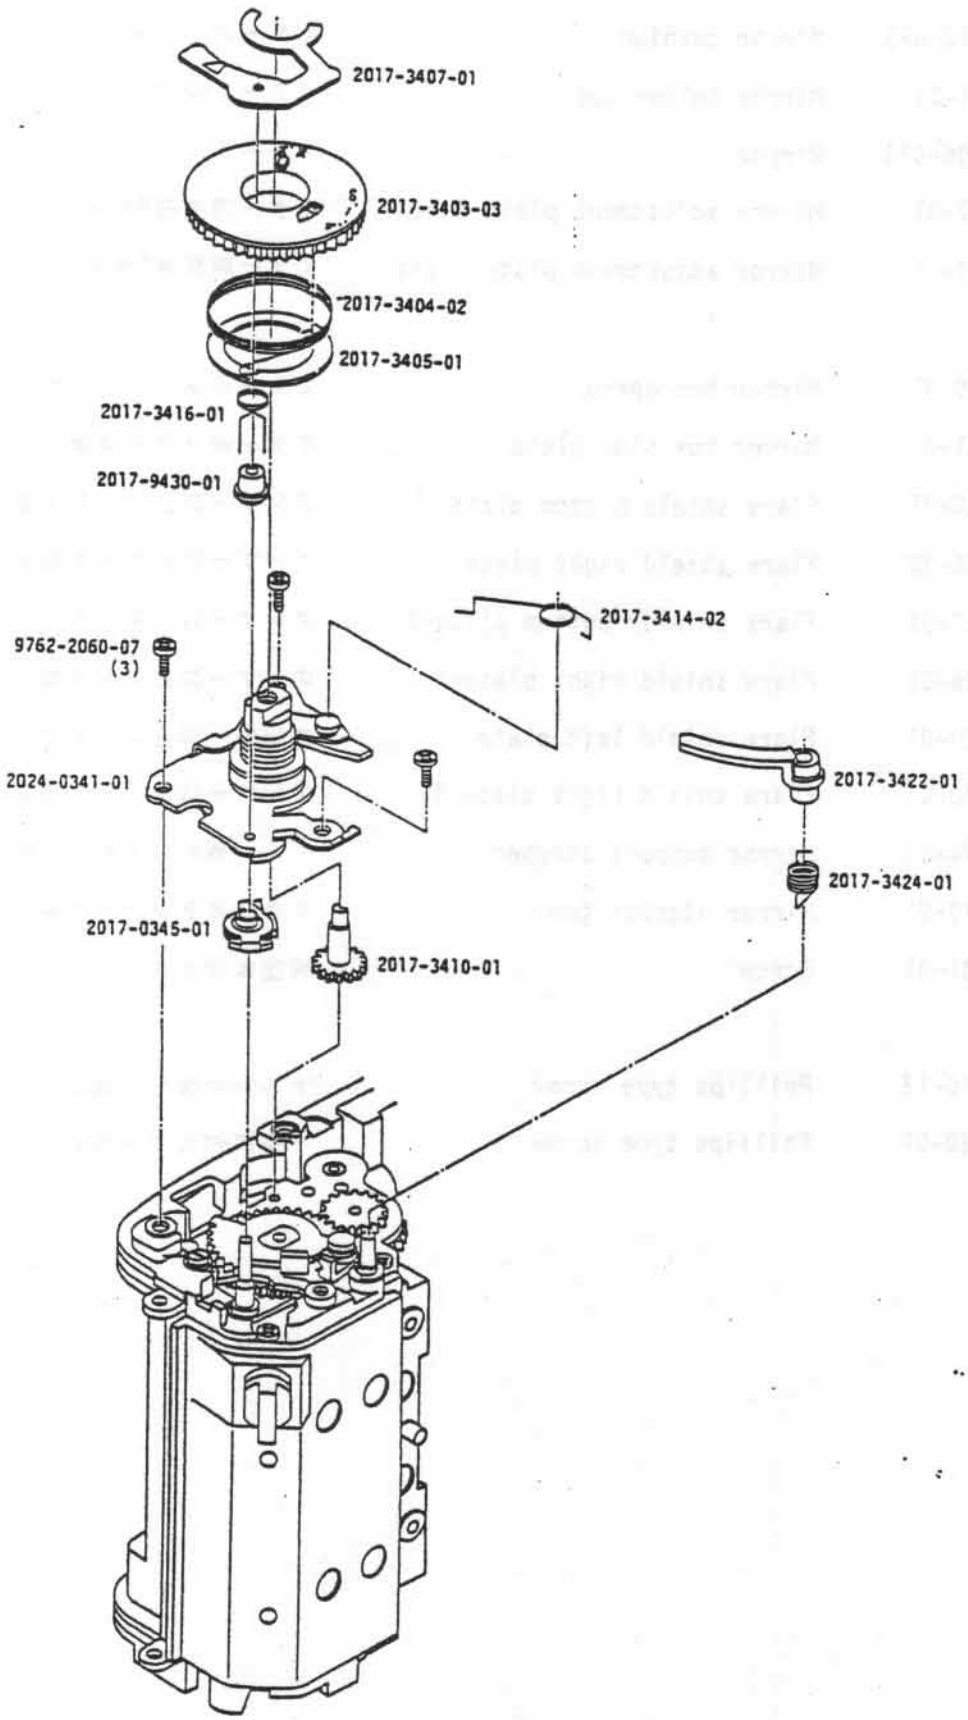

Part No.	Part Name		Qty
2024-0341-01	Winding base plate-B set	巻取台板Bセット	1
2017-0345-01	Winding operation lever set	トンボ返りレバーセット	1
2017-3403-03	Counter dial	カウンターラチエット	1
2017-3404-02	Counter return spring	カウンター戻しSP	1
2017-3405-01	Washer	カウンター補助ワッシャー	1
2017-3407-01	Counter index	カウンター指標板	1
2017-3410-01	Counter operation gear	フイルムカウンターギヤー	1
2017-3414-02	Return spring	カウンターレバー操作SP	1
2017-3416-01	Winding operation lever spring	トンボ返りレバーSP	1
2017-3422-01	Safe loading signal lever	フイルム表示レバー	1
2017-3424-01	S.L.S. lever spring	SLS駆動SP	1
2017-9430-01	Collar	カウンター指標カラー	1
9762-2060-07	Tap tite screw	十字穴付なべタップタイトねじ	3

X-300 Code No.2025-100
X-370 Code No.2025-300

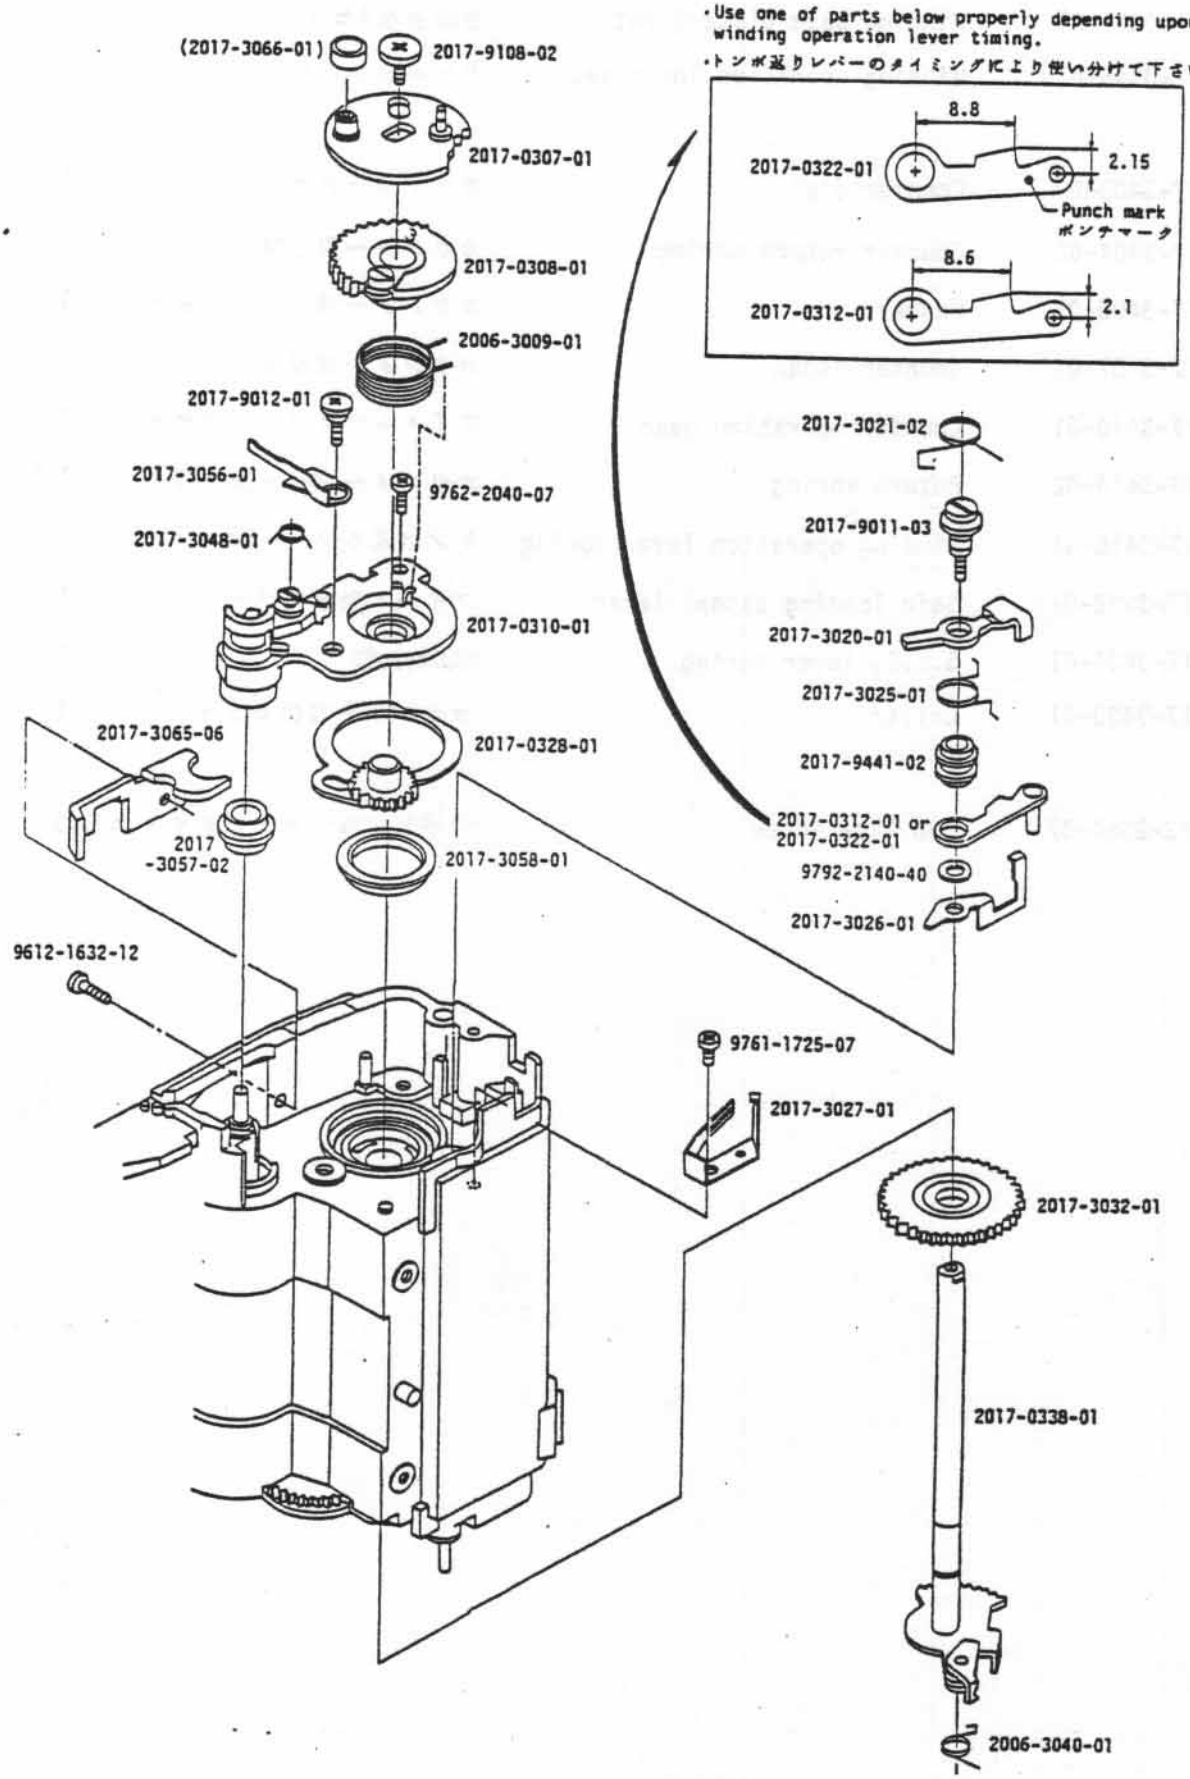

Part No.	Part Name		Qty
2017-0307-01	Charge operation plate set	チャージ操作板セット	1
(2017-3066-01)	Stopper	巻上ストッパーゴム	1
2017-0308-01	Shutter charge gear-D set	シャッターチャージギヤーDセット	1
2017-0310-01	Winding shaft receiver set	巻取下軸受セット	1
2017-0312-01	Winding stop lever-A set	巻止めレバーAセット	} 1
2017-0322-01	Winding stop lever-A set	巻止めレバーAセット	
2017-0328-01	Gear-C base plate set	ギヤーC台板セット	1
2017-0338-01	Winding shaft set	巻取操作板セット	1
2006-3009-01	Return spring	戻しSP	1
2017-3020-01	Reset lever	リセットレバー	1
2017-3021-02	Reset lever spring	リセットレバーSP	1
2017-3025-01	Reset lever surpport spring	リセットレバー補助SP	1
2017-3026-01	Contact-A (S4)	S4接片A	1
2017-3027-01	Contact-B (S4)	S4接片B	1
2017-3032-01	Winding gear	巻取ギヤー	1
2006-3040-01	Winding claw spring	巻取爪SP	1
2017-3048-01	Over-run stop lever spring	オーバーラン防止レバーSP	1
2017-3056-01	R button lock spring	R釦ロックばね	1
2017-3057-02	Sprocket receiver	スプロケット軸受	1
2017-3058-01	Collar	巻取下軸受補助カラー	1
2017-3065-06	Stopper	チャージ操作板ストッパー	1
2017-9011-03	Screw	巻止めレバー軸	1
2017-9012-01	Screw	巻止め軸受止めねじ	1
2017-9108-02	Screw	チャージ板押えビス	1
2017-9441-02	Collar	巻止めレバーカラー	1
9612-1632-12	Phillips type screw	十字穴付なべ小ねじ	1
9761-1725-07	Tap tite screw	十字穴付なべタップタイトねじ	1
9762-2040-07	Tap tite screw	十字穴付なべタップタイトねじ	1
9792-2140-40	Washer	薄ワッシャー	1

X-300 Code No.2025-100
X-370 Code No.2025-300

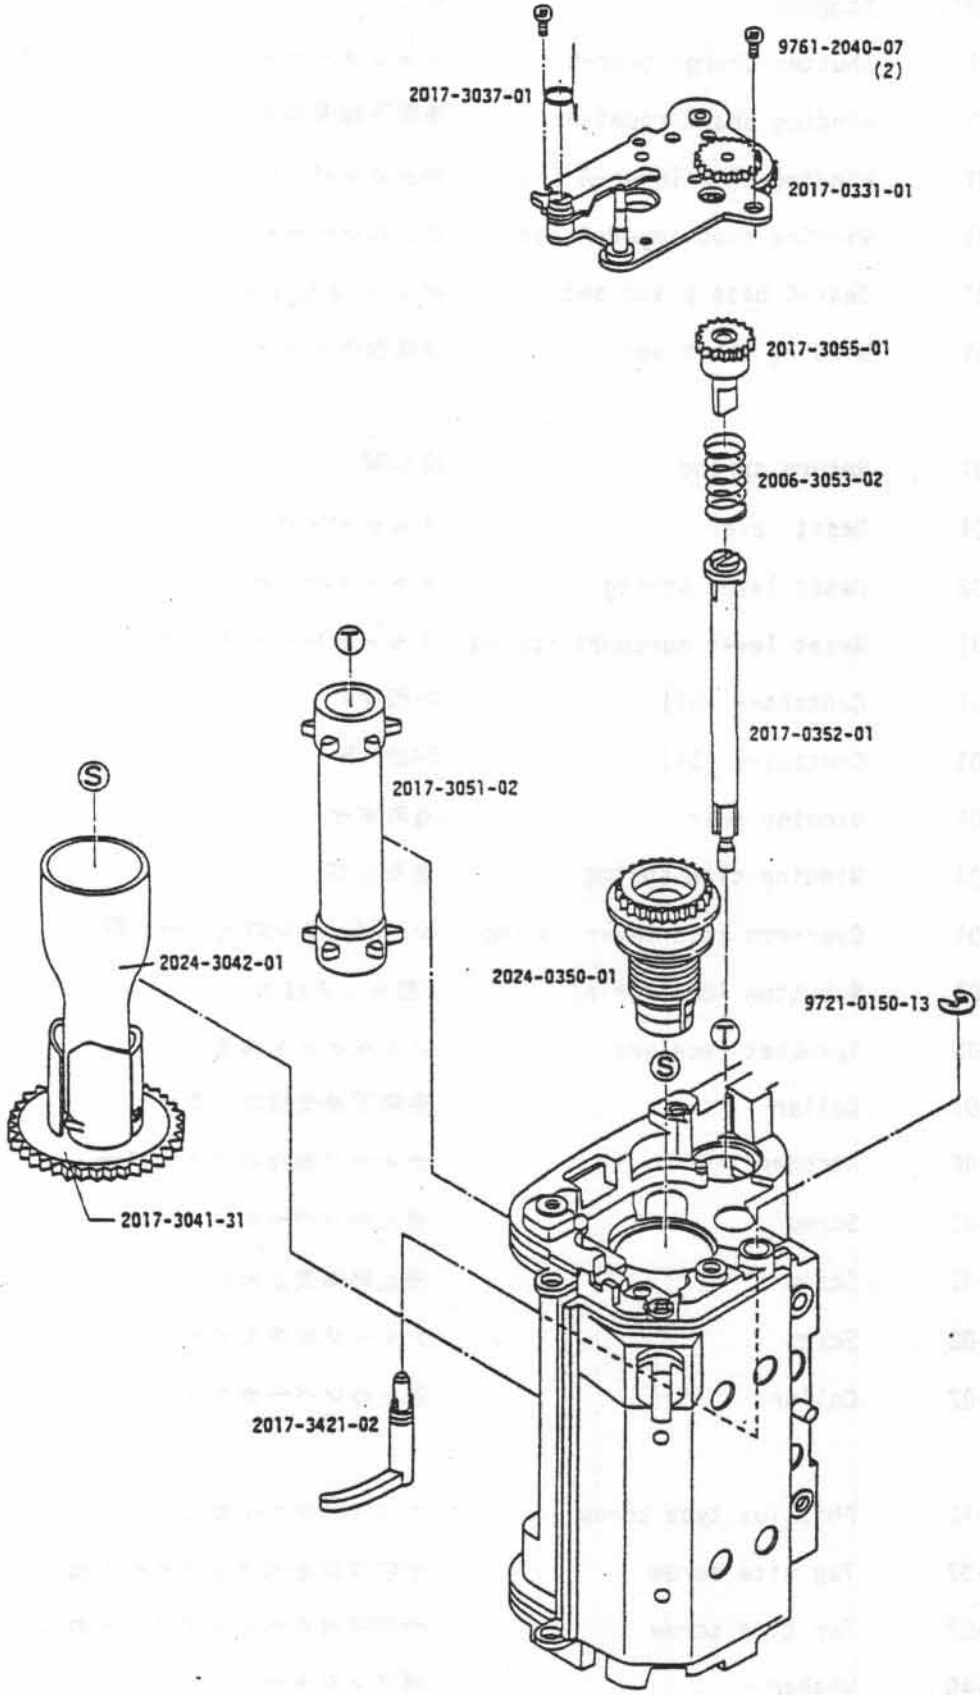

Part No.	Part Name		Qty
2017-0331-01	Winding base plate-A set	巻取台板Aセット	1
2024-0350-01	Spool friction gear set	スプールフリクション ギヤーセット	1
2017-0352-01	Sprocket shaft set	スプロケット軸セット	1
2017-3037-01	Reversion stop lever spring	逆転止めレバーSP	1
2017-3041-31	Spool	スプール	1
2024-3042-01	Spool inner barrel	スプール内筒	1
2017-3051-02	Sprocket	スプロケット	1
2006-3053-02	R button release spring	R釦解除SP	1
2017-3055-01	Sprocket gear	スプロケットギヤー	1
2017-3421-02	Film indication filler	フイルム表示フイラー	1
9721-0150-13	E ring	E リング	1
9761-2040-07	Tap tite screw	十字穴付なべタップタイトねじ	2

X-300 Code No.2025-100
X-370 Code No.2025-300

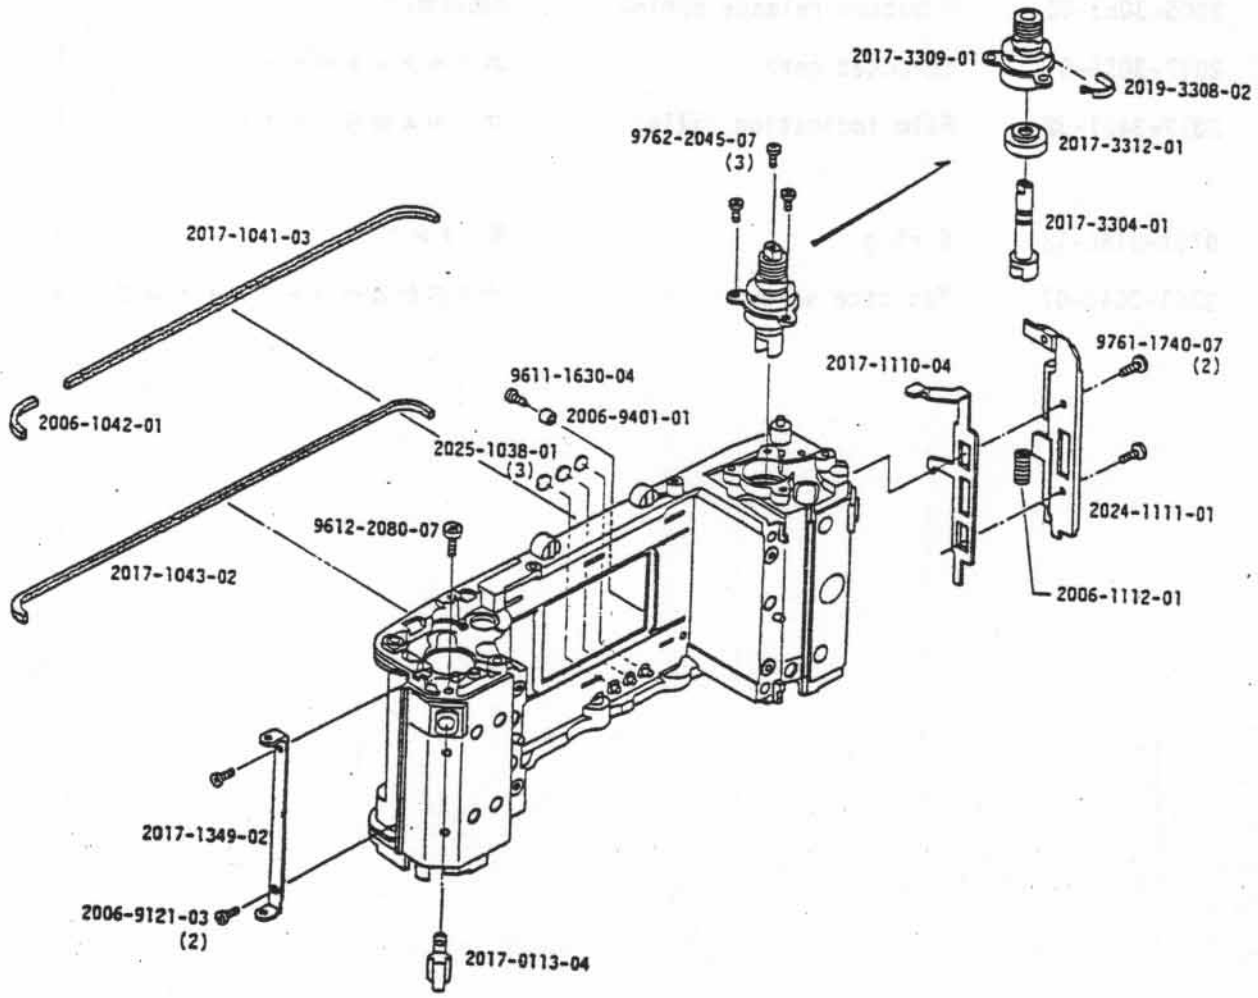

Part No.	Part Name		Qty
2017-0113-04	Strap hanger set	吊環セット	1
2025-1038-01	Mask sheet	信号ピンマスクシート	3
2017-1041-03	Light shield packing-A	遮光パッキンA	1
2006-1042-01	Light shield packing-B	遮光パッキンB	1
2017-1043-02	Light shield packing-C	遮光パッキンC	1
2017-1110-04	Back cover lock lever	裏蓋ロックレバー	1
2024-1111-01	Lock cover	ロックカバー	1
2006-1112-01	Back cover lock spring	裏蓋ロックSP	1
2017-1349-02	Hinge	ヒンジ	1
2017-3304-01	Rewinding fork	巻戻しフオーク	1
2019-3308-02	Rewinding friction spring	巻戻しフリクションSP	1
2017-3309-01	Rewinding axis receiver	巻戻し軸受	1
2017-3312-01	Light shield collar	巻戻し遮光カラー	1
2006-9121-03	Tapping screw	止めねじ	2
2006-9401-01	Film guide collar	フイルムガイドカラー	1
9611-1630-04	Phillips type screw	十字穴付なべ小ねじ	1
9612-2080-07	Phillips type screw	十字穴付なべ小ねじ	1
9761-1740-07	Tap tite screw	十字穴付なべタップタイトねじ	2
9762-2045-07	Tap tite screw	十字穴付なべタップタイトねじ	3

X-300 Code No.2025-100
X-370 Code No.2025-300

Assy. Part No.2025-0401-01

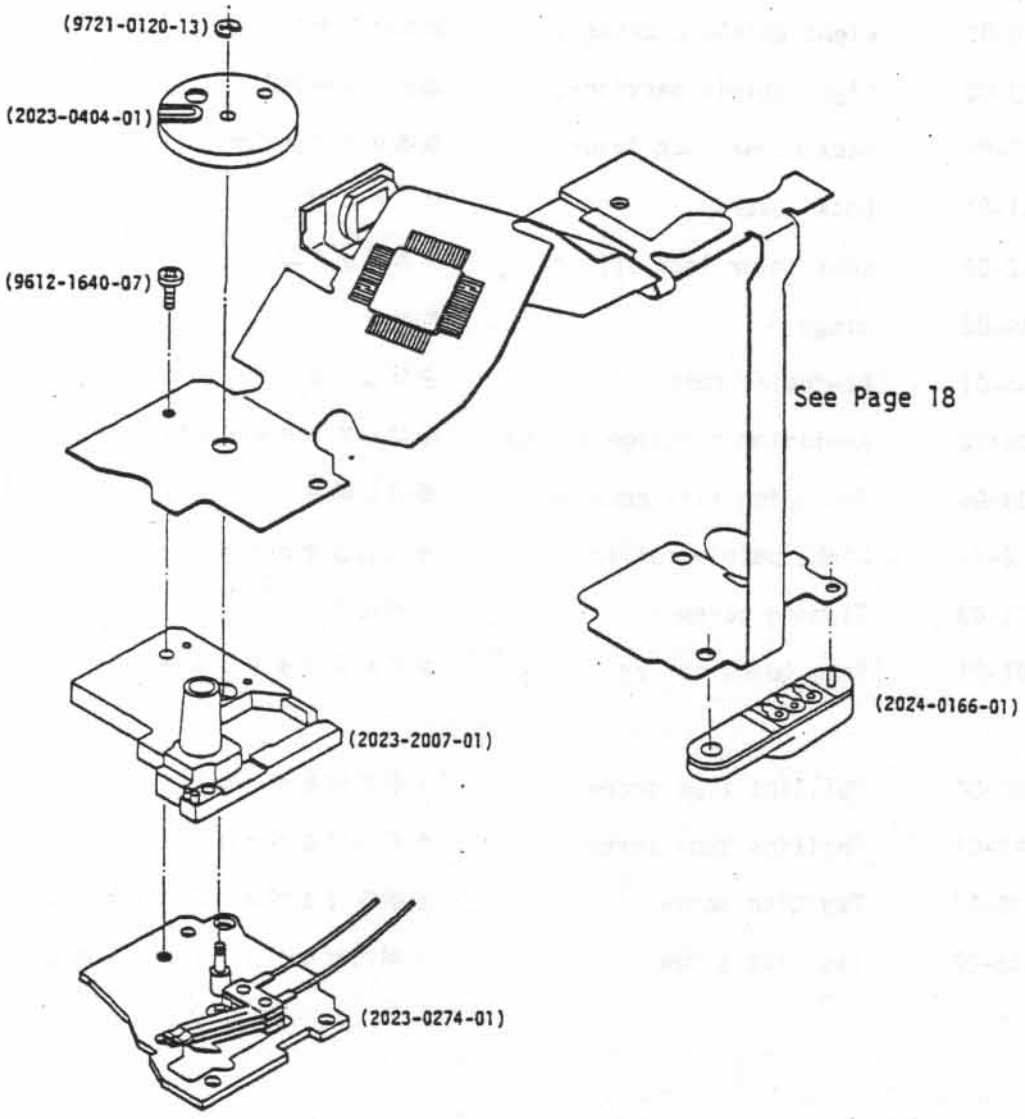

Part No.	Part Name		Qty
2025-0401-01	Flexible PC board	フレキシブル基板セット	1
(2024-0166-01)	Motor drive connect holder set	モードラ接点ホルダーセット	1
(2023-0274-01)	Shutter dial plate set	シャッターダイヤル台板セット	1
(2023-0404-01)	TV contact set	TV接片ホルダーセット	1
(2023-2007-01)	Shutter dial holder	シャッターダイヤルホルダー	1
(9612-1640-07)	Phillips type screw	十字穴付なべ小ねじ	1
(9721-0120-13)	E ring	E リング	1

X-300 Code No.2025-100
X-370 Code No.2025-300

Assy. Part No.2017-0201-02

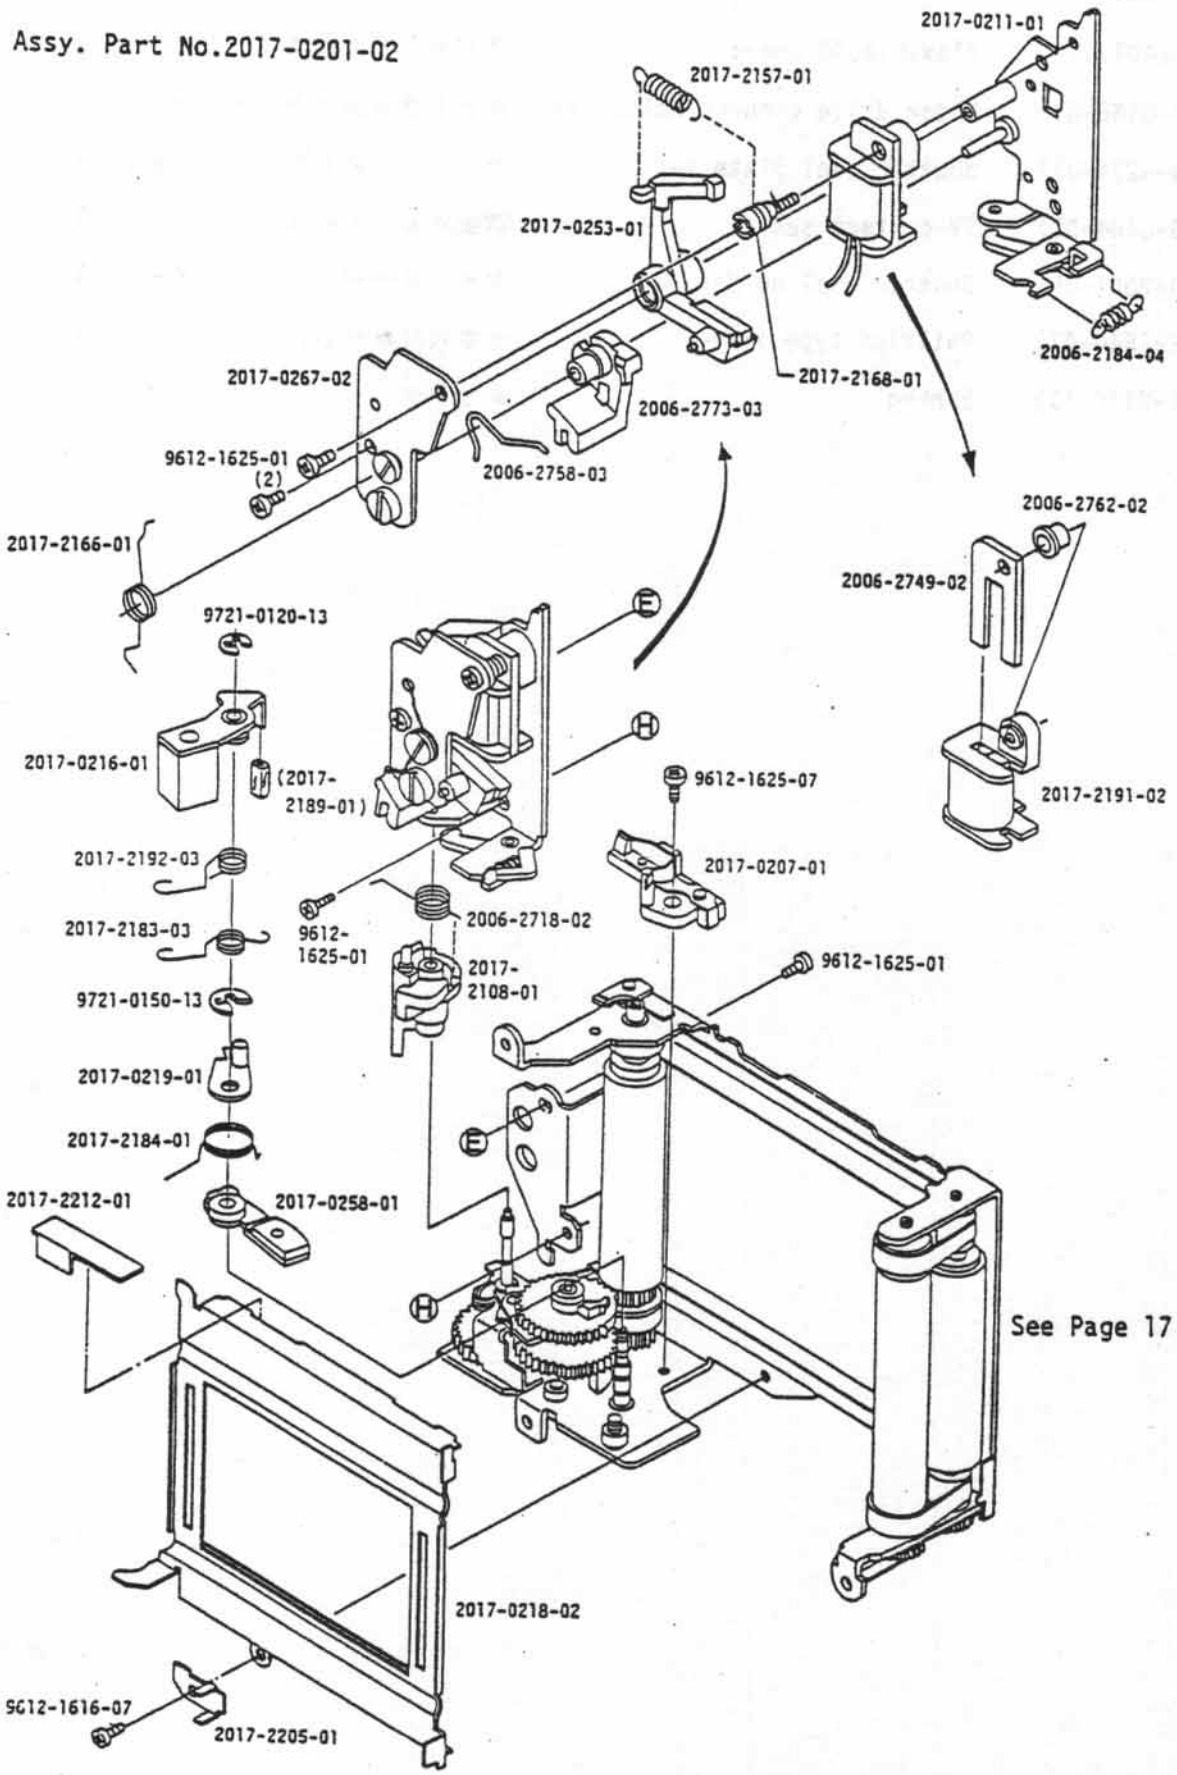

See Page 17

Part No.	Part Name		Qty
2017-0201-02	Shutter block	シャッターブロック	1
2017-0207-01	X contact plate set	X接片セット	1
2017-0211-01	Control base plate set	制御台板セット	1
2017-0216-01	2nd. curtain brake lever set	二幕ブレーキレバーセット	1
(2017-2189-01)	Isolation tube	X接片絶縁チューブ	1
2017-0218-02	Shutter cover plate set	シャッターカバー板セット	1
2017-0219-01	1st. curtain support lever set	一幕ブレーキ補助レバーセット	1
2017-0253-01	2nd. curtain release lever set	二幕解除レバーセット	1
2017-0258-01	1st. curtain brake lever set	一幕ブレーキレバーセット	1
2017-0267-02	Winding base plate set	Mag. 配線基板セット	1
2017-2108-01	Control cam	制御カム	1
2017-2157-01	2nd. curtain release lever spring	二幕解除レバーSP	1
2017-2166-01	Trigger contact	トリガー接片	1
2017-2168-01	Screw	トリガー基板取付ねじ	1
2017-2183-03	1st. curtain brake spring-B	一幕ブレーキSP－B	1
2006-2184-04	2nd. curtain brake spring	制御カム係止レバーSP	1
2017-2184-01	1st. curtain brake spring-A	一幕ブレーキSP－A	1
2017-2191-02	Shutter magnet bobbin	シャッターマグネットボビン	1
2017-2192-03	2nd. curtain brake spring-A	二幕ブレーキSP－A	1
2017-2205-01	Lead wire pressure	リード線押え	1
2017-2212-01	Shutter light shield plate	シャッター遮光シート	1
2006-2718-02	Control cam operation spring	制御カム駆動SP	1
2006-2749-02	Shutter magnet core	シャッターマグネット鉄芯	1
2006-2758-03	Over charge spring	吸着片オーバーチャージSP	1
2006-2762-02	Magnet collar	マグネット取付カラー	1
2006-2773-03	Trigger contact operation lever	トリガー接片作動レバー	1
9612-1616-07	Phillips type screw	十字穴付なべ小ねじ	1
9612-1625-01	Phillips type screw	十字穴付なべ小ねじ	4
9612-1625-07	Phillips type screw	十字穴付なべ小ねじ	1
9721-0120-13	E ring	E リング	1
9721-0150-13	E ring	E リング	1

X-300 Code No.2025-100
X-370 Code No.2025-300

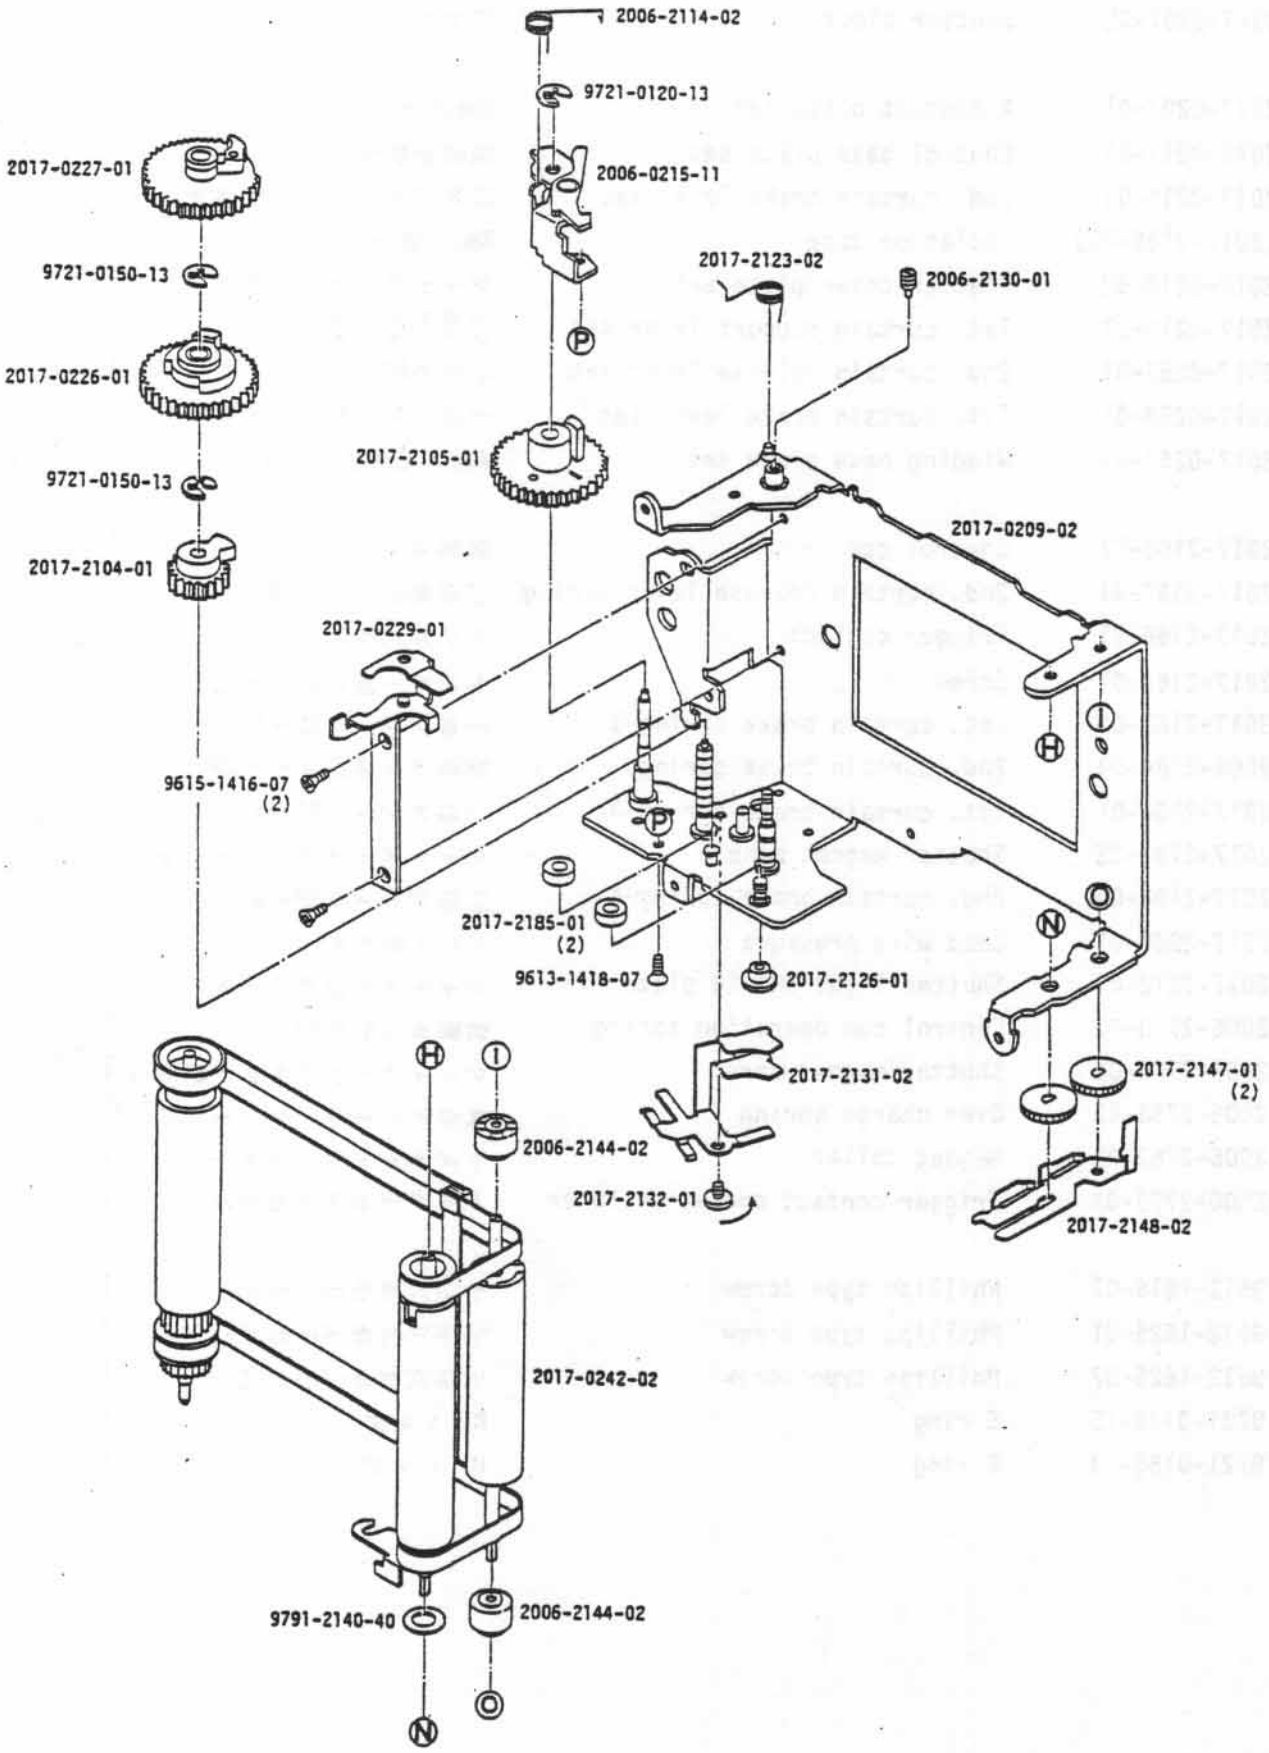

Part No.	Part Name		Qty
2017-0209-02	Shutter base plate set	シャッター台板セット	1
2006-0215-11	1st. curtain stop lever set	一幕係止レバーセット	1
2017-0226-01	1st. curtain shutter gear set	一幕シャッターギヤーセット	1
2017-0227-01	2nd. curtain shutter gear set	二幕シャッターギヤーセット	1
2017-0229-01	2nd. curtain stop lever set	二幕係止レバーセット	1
2017-0242-02	Shutter curtain set	シャッター幕セット	1
2017-2104-01	Charge gear-B	チャージギヤーB	1
2017-2105-01	Charge gear-A	チャージギヤーA	1
2006-2114-02	1st. curtain stop lever spring	一幕係止レバーSP	1
2017-2123-02	2nd. curtain stop lever spring	二幕係止レバーSP	1
2017-2126-01	Curtain shaft receiver-B	幕軸受B	1
2006-2130-01	Adjusting screw	幕軸調整ビス	1
2017-2131-02	Ribbon guide plate	幕リボンガイド板	1
2017-2132-01	Screw	幕リボンガイド板止めねじ	1
2006-2144-02	2nd. curtain roller-B	二幕ローラーB	2
2017-2147-01	Ratchet	SP筒軸止めラチエット	2
2017-2148-02	Ratchet stop spring	ラチエット止めばね	1
2017-2185-01	Brake stopper	ブレーキストッパー	2
9613-1418-07	Phillips type screw	十字穴付半丸皿小ねじ	1
9615-1416-07	Phillips type screw	十字穴付皿小ねじ	2
9721-0120-13	E ring	E リング	1
9721-0150-13	E ring	E リング	2
9791-2140-40	Washer	薄ワッシャー	1

X-300 Code No.2025-100
X-370 Code No.2025-300

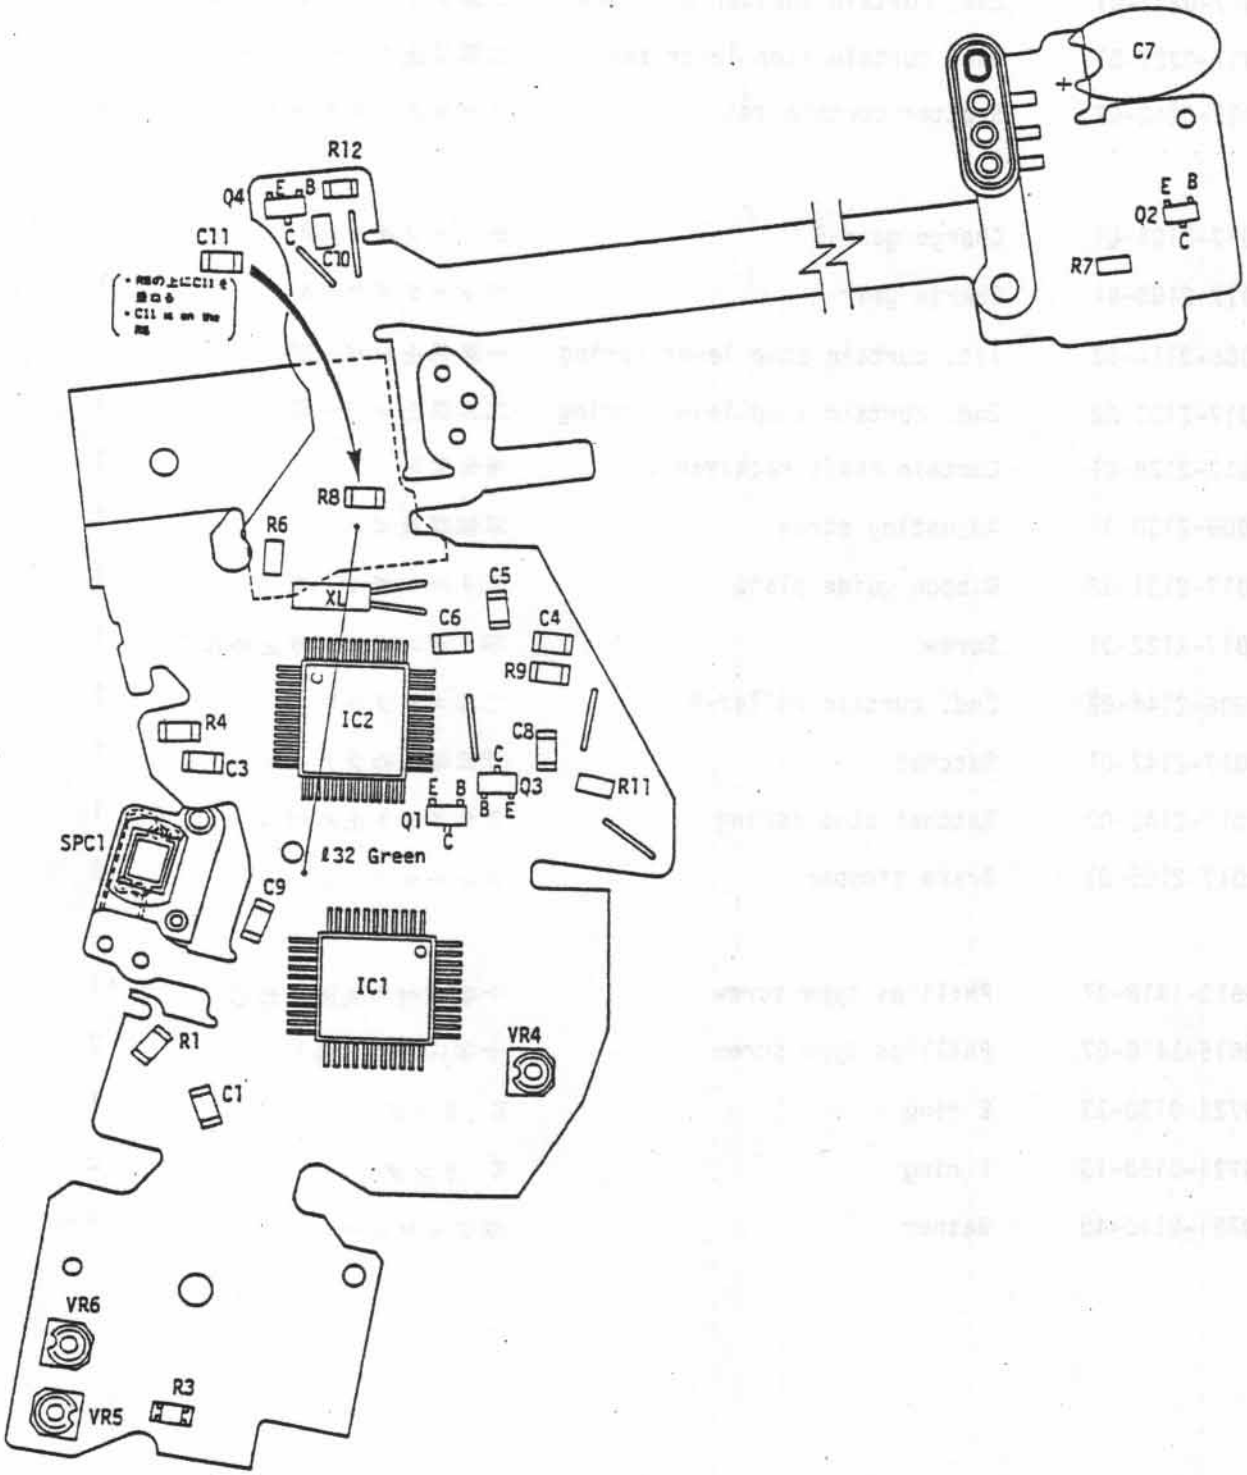

Flexible PC board set

Assy. Part No. 2025-0401-01 Assy. Part Name フレキシブル基板セット

Symbol	Part No.	Part Name (Maker,Type)	Qty.
IC1	2024-4301-01	IC (OKI,MSA402GS)	1
IC2	2024-4302-02	IC (OKI,MSM5237GS)	1
Q1	9363-1032-01	Transistor (TOSHIBA,2SA1162)	1
	9363-1032-02	Transistor (TOSHIBA,2SA1162)	
	9363-1032-03	Transistor (TOSHIBA,2SA1162)	
Q2	9362-1261-01	Transistor (SANYO,2SD1048)	1
	9362-1261-02	Transistor (SANYO,2SD1048)	
	9362-1261-03	Transistor (SANYO,2SD1048)	
Q3,Q4	9362-1032-01	Transistor (TOSHIBA,2SC2712)	2
	9362-1032-02	Transistor (TOSHIBA,2SC2712)	
	9362-1032-03	Transistor (TOSHIBA,2SC2712)	
	9362-1032-04	Transistor (TOSHIBA,2SC2712)	
XL	9373-4162-01	Crystal resonator (SEIKO,C-2-32.7)	1
SPC1	2024-0491-01	Silicon Photo cell	1
R4,R1	9432-2246-62	Fixed resistor (KYOTO CERAMIC,1/8W 220KΩ)	2
R3	9432-1536-62	Fixed resistor (KYOTO CERAMIC,1/8W 15KΩ)	1
R6	9422-1016-62	Fixed resistor (MATSUSHITA,1/8W 100Ω)	1
R7	9422-1026-62	Fixed resistor (MATSUSHITA,1/8W 1KΩ)	1
R8	9432-3357-61	Fixed resistor (MATSUSHITA,1/8W 3.3MΩ)	1
R9	9432-1068-61	Fixed resistor (HOKURIKU,1/8W 10MΩ)	1
	9432-2068-61	Fixed resistor (HOKURIKU,1/8W 20MΩ)	
	9432-3068-61	Fixed resistor (HOKURIKU,1/8W 30MΩ)	
R11	9422-6836-62	Fixed resistor (MATSUSHITA,1/8W 68KΩ)	1
	9422-8236-62	Fixed resistor (MATSUSHITA,1/8W 82KΩ)	
	9422-1246-62	Fixed resistor (MATSUSHITA,1/8W 120KΩ)	
	9422-1846-62	Fixed resistor (MATSUSHITA,1/8W 180KΩ)	
	9422-3946-62	Fixed resistor (MATSUSHITA,1/8W 390KΩ)	
R12	9431-3348-62	Fixed resistor (ALPS,1/16W 330KΩ)	1
VR4	9472-3329-63	Variable resistor (MATSUSHITA,EVM-14G 3.3KΩ)	1
VR5	9472-1539-63	Variable resistor (MATSUSHITA,EVM-14G 15KΩ)	1
VR6	9472-1039-63	Variable resistor (MATSUSHITA,EVM-14G 10KΩ)	1
C1	9565-1034-64	Condenser (Ceramic)(MURATA,0.01μF/50V)	1
C3	9564-4734-64	Condenser (Ceramic)(MURATA,0.047μF/25V)	1
C4	9564-1034-61	Condenser (Ceramic)(KYOTO CERAMIC,0.01μF/25V)	1
C6,C5	9564-2204-65	Condenser (Ceramic)(KYOTO CERAMIC,22PF/25V)	2
C7	9531-1575-61	Condenser (Tantalum)(MATSUO,150μF/3.15V)	1
C8	9565-3338-65	Condenser (Ceramic)(MURATA,0.033μF/50V)	1
C9	9565-4705-62	Condenser (Ceramic)(MURATA,47PF/50V)	1
C10	9565-4738-65	Condenser (Ceramic)(MURATA,0.047μF/50V)	1
C11	9565-3324-64	Condenser (Ceramic)(MURATA,3300PF/50V)	1
ℓ32	9391-0807-05	Lead wire (Green, φ0.08/7, ℓ=35)	1

Lead wires list

Symbol	Part No.	Color	Type	Qty.
ℓ3	9391-0507-03	Orange	ϕ 0.05/7 ℓ=70	1
ℓ4	9391-0507-06	Blue	ϕ 0.05/7 ℓ=70	1
ℓ5	9391-0507-01	Brown	ϕ 0.05/7 ℓ=80	1
ℓ6	9391-0507-01	Brown	ϕ 0.05/7 ℓ=85	1
ℓ7	9391-0507-05	Green	ϕ 0.05/7 ℓ=90	1
ℓ8	9391-0507-03	Orange	ϕ 0.05/7 ℓ=95	1
ℓ10	9391-0807-08	Gray	ϕ 0.08/7 ℓ=40	1
ℓ11	9391-0807-06	Blue	ϕ 0.08/7 ℓ=95	1
ℓ12	9391-0807-04	Yellow	ϕ 0.08/7 ℓ=95	1
ℓ13	9391-0807-02	Red	ϕ 0.08/7 ℓ=105	1
ℓ14	9391-0807-09	White	ϕ 0.08/7 ℓ=75	1
ℓ15	9391-0807-03	Orange	ϕ 0.08/7 ℓ=105	1
ℓ16	9391-0807-08	Gray	ϕ 0.08/7 ℓ=65	1
ℓ17	9391-0807-05	Green	ϕ 0.08/7 ℓ=115	1
ℓ19	9391-0807-00	Black	ϕ 0.08/7 ℓ=35	1
ℓ21	9391-0807-04	Yellow	ϕ 0.08/7 ℓ=160	1
ℓ22	9391-0807-02	Red	ϕ 0.08/7 ℓ=30	1
ℓ25	9391-0807-00	Black	ϕ 0.08/7 ℓ=50	1
ℓ26	9391-0807-00	Black	ϕ 0.08/7 ℓ=80	1
ℓ27	9391-0807-07	Purple	ϕ 0.08/7 ℓ=145	1
ℓ28	9391-0807-07	Purple	ϕ 0.08/7 ℓ=50	1
ℓ30	9391-0807-09	White	ϕ 0.08/7 ℓ=65	1
ℓ32	9391-0807-05	Green	ϕ 0.08/7 ℓ=35	1
ℓ35	9391-0807-01	Brown	ϕ 0.08/7 ℓ=70	1
ℓ36	9391-0807-08	Gray	ϕ 0.08/7 ℓ=70	1
ℓ37	9391-0807-11	Light Blue	ϕ 0.08/7 ℓ=170	1
ℓ39	9391-0507-00	Black	ϕ 0.05/7 ℓ=30	1

X－３００　Code No.2025−100
X－３７０　Code No.2025−300